

## DESCRIPTION

PD (Powered Device) Integrated Module (Isolation Type)

## FEATURES

- Fully supports IEEE802.3af/at/bt
- Small Single In-Line (SIL) package size –62mm (L) x 27mm (H)
- Input Voltage Range 44V to 57V
- Support PoE applications in both of Fast / Gigabit Ethernet environments.
- Short Circuit Protection
- Over-temperature Protection
- Programmable Classification (Default:Class 8)
- High Efficiency
- Isolation level 1.5KVrms.
- Easy Installation and Low Cost (Isolation Type, Minimum External Devices required)
- Low Output Ripple and Noise
- Adjustable Output Voltage
- 1500Vrms Isolation (Input-Output)
- **DP1205BT V4-S is Straight needle,DP1205BT V4 is Curved needle**

## APPLICATION AREAS

- Security and alarm systems
- Voice over IP phones
- Access control systems
- IP Cameras
- Displays, Net Monitors
- Public address systems
- Wireless access points
- Environmental control
- Telemetry
- Remote environmental monitoring


# 1 Product Overview

## 1.1 DP1205 Product Selector


| Part Number          | Nominal Output Voltage | Maximum Output Power *               |
|----------------------|------------------------|--------------------------------------|
| <b>DP1205BT V4-S</b> | 12.0V                  | 60 Watts Peak<br>50 Watts Continuous |
| <b>DP1205BT V4</b>   | 12.0V                  | 60 Watts Peak<br>50 Watts Continuous |

\*At 25°C with  $V_{IN} = 52V$


**Table 1: Ordering Information**

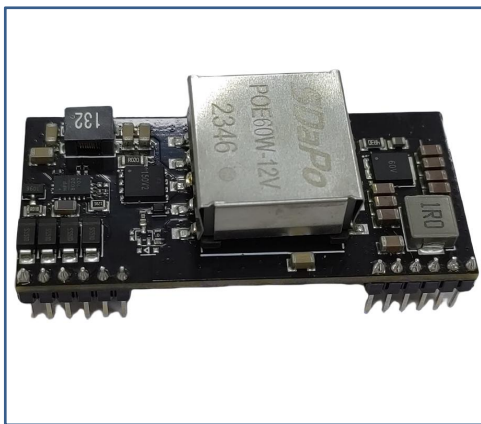

**DP1205BT V4-S**

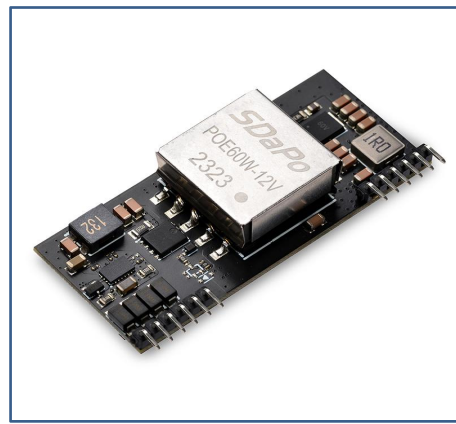

**DP1205BT V4**

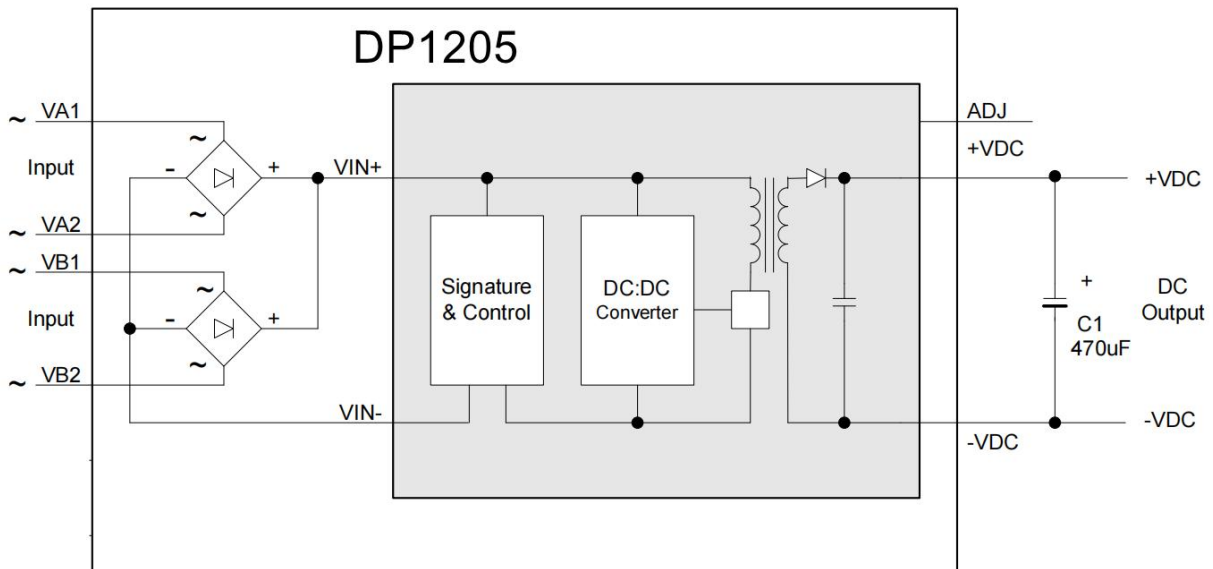

**Figure 1: Block Diagram**


## 1.2 Pin Description

|      |      |  |
|------|------|--|
| 1    | VA1  | <b>RX Input (1).</b> This input pin is used in conjunction with VA2 and connects to the centre tap of the transformer connected to pins 1 & 2 of the RJ45 connector (RX) - it is not polarity sensitive. |
| 2    | VA2  | <b>TX Input (2).</b> This input pin is used in conjunction with VA1 and connects to the centre tap of the transformer connected to pins 3 & 6 of the RJ45 connector (TX) - it is not polarity sensitive. |
| 3    | VB1  | <b>Direct Input (1).</b> This input pin is used in conjunction with VB2 and connects to pin 4 & 5 of the RJ45 connector - it is not polarity sensitive.  |
| 4    | VB2  | <b>Direct Input (2).</b> This input pin is used in conjunction with VB1 and connects to pin 7 & 8 of the RJ45 connector - it is not polarity sensitive.  |
| 5,6  | NC   | <b>No Connection</b>   |
| 7,8  | -VDC | <b>DC Return.</b> This pin is the return path for the +VDC output.   |
| 9,10 | +VDC | <b>DC Output.</b> This pin provides the regulated output from the DC/DC converter.   |
| 11   | ADJ  | <b>Output Adjust.</b> The output voltage can be adjusted from its nominal value, by connecting an external resistor from this pin to either the +VDC pin or the - VDC pin                                |
| 12   | NC   | <b>No Connection</b>   |

## 2 Functional Description

### 2.1 Typical Connections

#### 10/100 Base-T APPLICATION

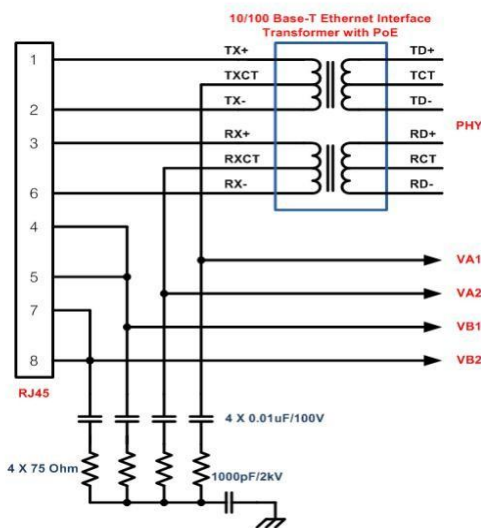

#### 10/100/1000 Base-T APPLICATION


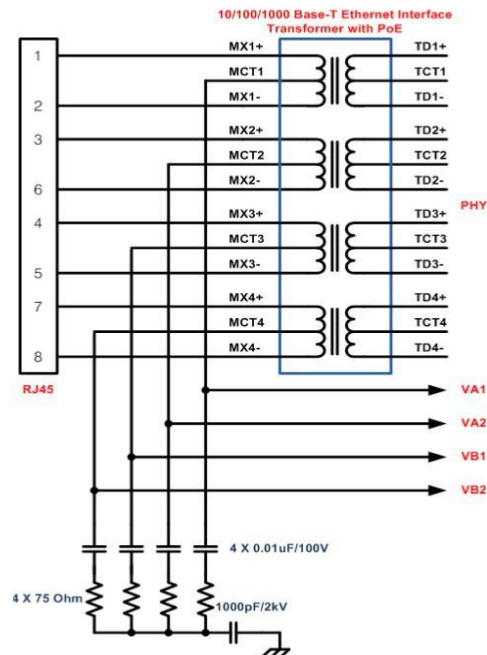


Figure 2: Typical System Diagram

## 2.2 Output Voltage Adjustment

The DP1205 series has an ADJ pin, which allows the output voltage to be increased or decreased.

Figure 3 shows how the ADJ pin is connected.

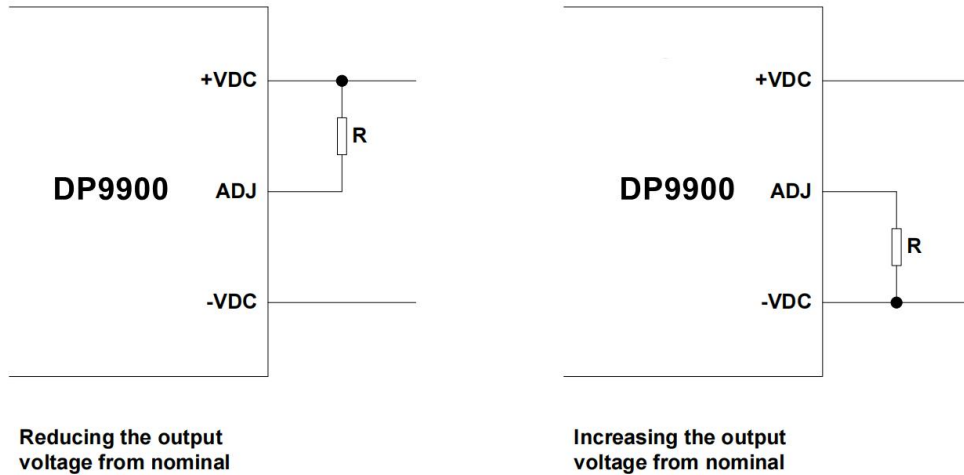

**Figure 3: Output Adjustment**

| Reducing the output voltage, connect R between ADJ and +VDC   |               |                   |
|---|---------------|-------------------|
| Value of R  | DP1205 Output | DP1205-24V Output |
| Open Circuit  | 12.07V        | 23.93V            |
| 0 Ohms  | 10.0V         | 19.85V            |
| 100K  | 11.15V        | 21.85V            |
| 470k  | 11.76V        | 23.23V            |
| Increasing the output voltage, connect R between ADJ and -VDC |               |                   |
| Value of R  | DP1205 Output | DP1205-24V Output |
| Open Circuit  | 12.07V        | 23.93V            |
| 0 Ohms  | 12.75V        | 24.6V             |
| 100K  | 12.34V        | 24.2V             |
| 470k  | 12.16V        | 24.01V            |

**Table 3: Output Adjustment Resistor (R) Value**

### 3 Electrical Characteristics

#### 3.1 Absolute Maximum Ratings

|   | Parameter                       | Symbol      | Min  | Max  | Units |
|---|---------------------------------|-------------|------|------|-------|
| 1 | DC Supply Voltage               | $V_{CC}$    | -0.3 | 60   | V     |
| 2 | DC Supply Voltage Surge for 1ms | $V_{SURGE}$ | -0.6 | 80   | V     |
| 3 | Storage Temperature             | $T_S$       | -40  | +100 | °C    |

#### 3.2 Recommended Operating Conditions

|   | Parameter             | Min     | Typ | Max | Units |
|---|-----------------------|---------|-----|-----|-------|
| 1 | Input Supply Voltage  | 36      | 52  | 57  | V     |
| 2 | Under Voltage Lockout | 30      |     | 36  | V     |
| 3 | Operating Temperature | -40     | 25  | 85  | °C    |
| 4 | IEEE 802.3bt          | Class 8 |     |     |       |

#### 3.3 DC Electrical Characteristics

|   | DC Characteristic  | Variant       | Sym       | Min  | Typ <sup>1</sup> | Max      | Units             |
|---|--|---------------|-----------|------|------------------|----------|-------------------|
| 1 | Nominal Output Voltage                                     | DP1205BT V4-S |           | 11.6 | 12               | 12.4     | V                 |
| 2 | <b>Minimum Load<sup>2</sup></b>                            | DP1205BT V4-S |           | 20   |                  |          | mA                |
| 3 | Output Current<br>( $V_{IN} = 52V$ )                       | DP1205BT V4-S |           |      | 5                |          | A                 |
| 4 | Line Regulation  | DP1205BT V4-S |           |      | 0.05             |          | %                 |
| 5 | Load Regulation –<br>Min to Max ( $V_{IN} = 52V$ )         | DP1205BT V4-S |           |      | 0.1              |          | %                 |
| 6 | Output Ripple and Noises <sub>5@</sub> <sup>Max load</sup> | DP1205BT V4-S |           |      | 80               | @4A      | mV <sub>P-P</sub> |
| 7 | Peak Efficiency  | DP1205BT V4-S |           |      | 92               | @4A      | %                 |
| 8 | Short-Circuit Duration <sup>3</sup>                        |               | $T_{SC}$  |      |                  | $\infty$ | sec               |
| 9 | Isolation Voltage (I/O) - Impulse Test                     |               | $V_{ISO}$ |      |                  | 1500     | V <sub>PK</sub>   |

Note 1: Typical figures are at 25°C with a nominal 52V supply and are for design aid only. Not Guaranteed


Note 2: The module can emit an audible noise, if operated at less than the stated minimum  $I_{LOAD}$  and cause the PSE to fail its MPS.

Note 3: >200mohm short due to thermal limitation.


Note 4 : The output ripple and noise can be reduced with an external filter

**4 Package**


**DP1205BT V4-S** ( Straight needle )

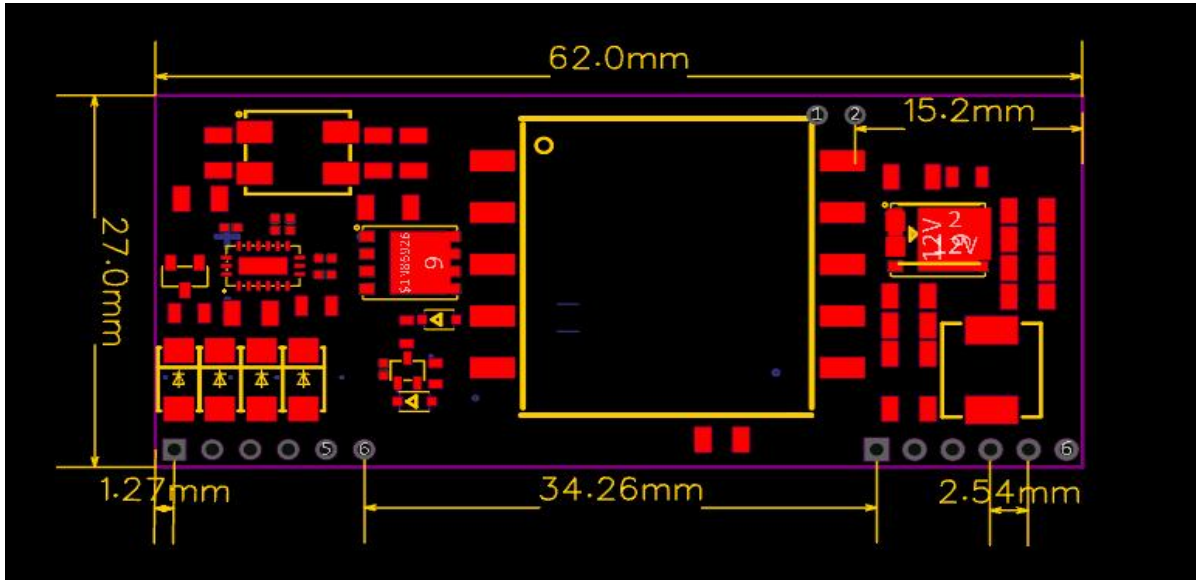

**DP1205BT V4** ( Curved needle )

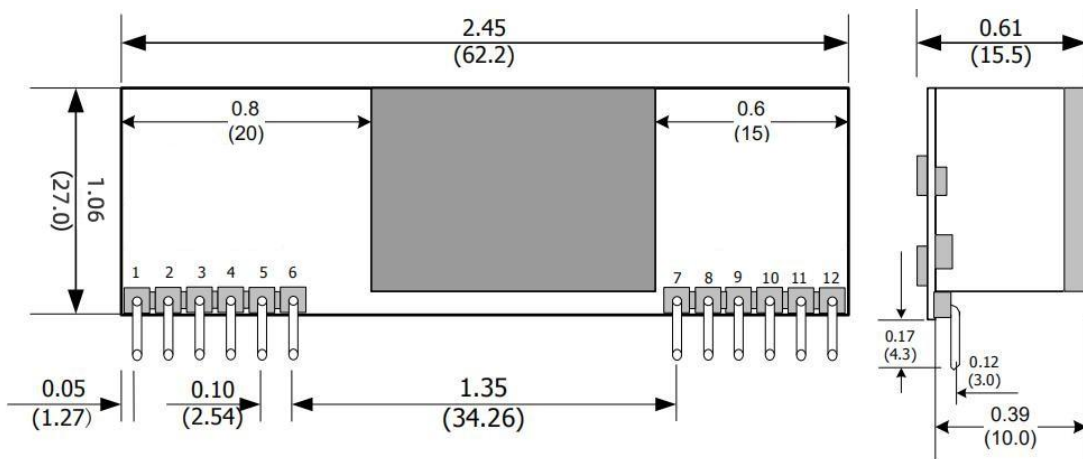


### 1. Power Delivery in PoE Systems

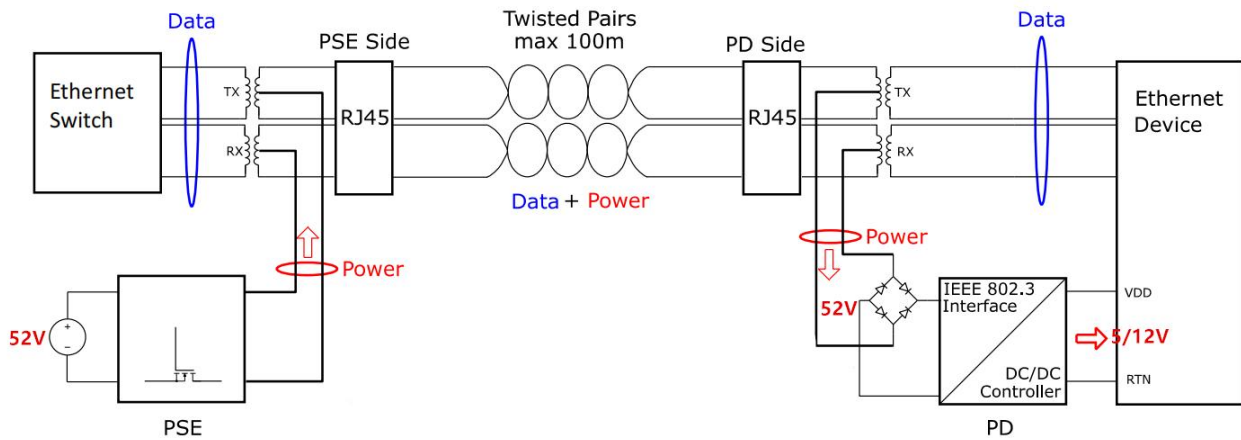


|                       | Type 1 802.3af |         |         | Type 2 802.3at | Type 3 802.3bt |         | Type 4 802.3bt |         |
|-----------------------|----------------|---------|---------|----------------|----------------|---------|----------------|---------|
| Power Class           | Class 1        | Class 2 | Class 3 | Class 4        | Class 5        | Class 6 | Class 7        | Class 8 |
| Power from PSE        | 4 W            | 7 W     | 15.4 W  | 30 W           | 45 W           | 60 W    | 75 W           | 90 W    |
| Power delivered to PD | 3.84 W         | 6.49 W  | 13 W    | 25.5 W         | 40 W           | 51 W    | 62 W           | 71.3 W  |

### 2. Establishing PoE Connection – Type 1 (IEEE 802.3af/PoE)

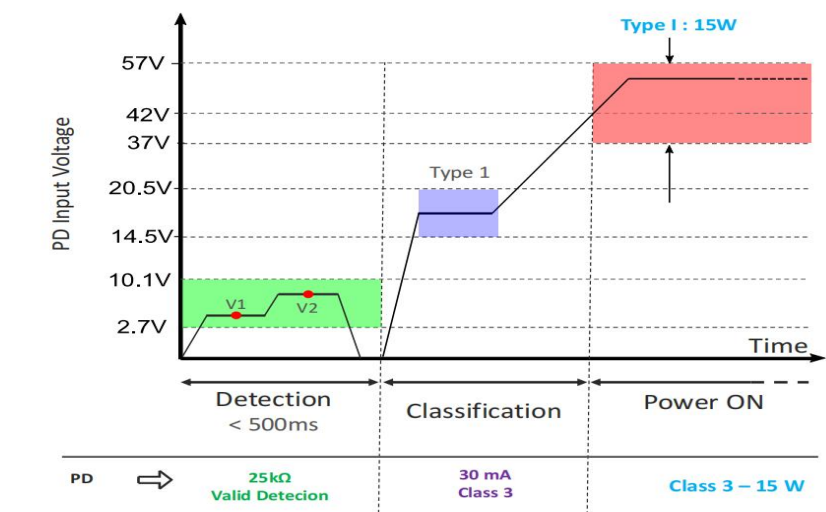

### 3. Establishing PoE Connection – Type 2 (IEEE 802.3at/PoE+)

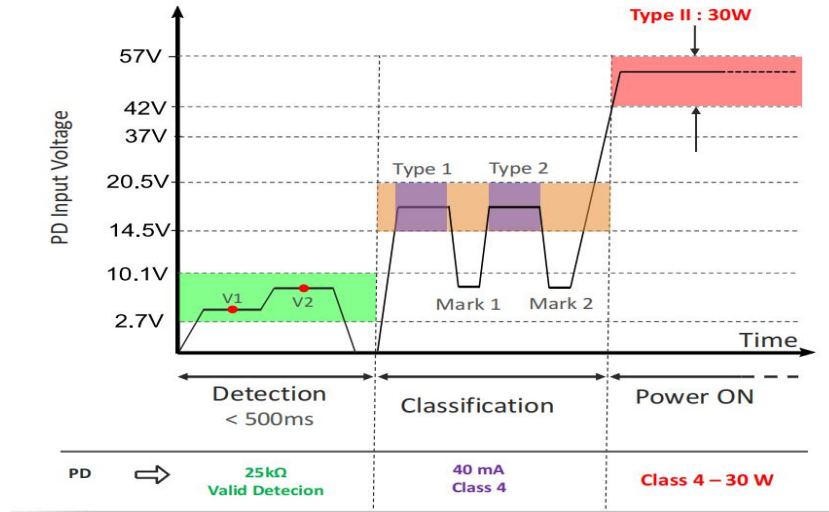

### 4. Establishing PoE Connection – Type 3 and 4 (IEEE 802.3bt)

