
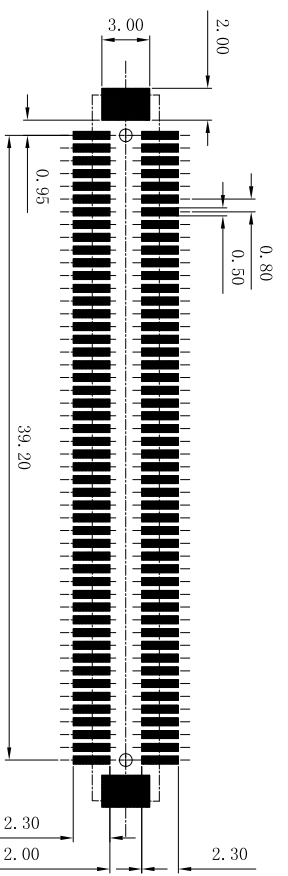
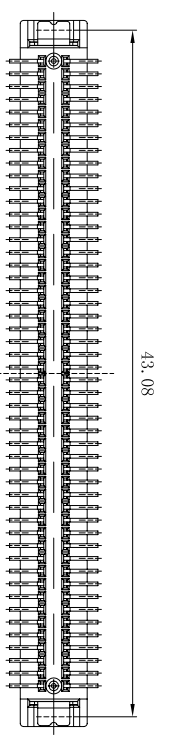


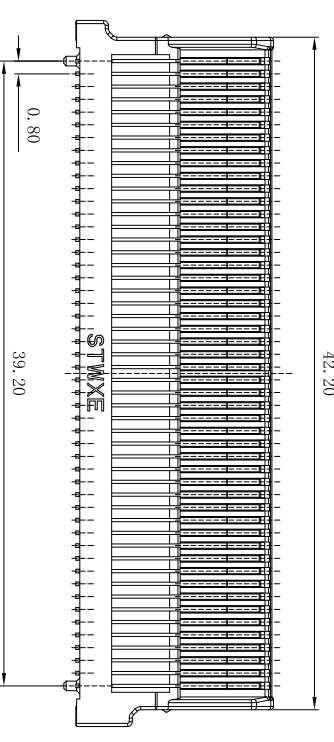




REV.	ECN Number	Description	Drawn
1	CS21060039	初版发行	2021/06/10

100PIN:BB41-A0JT-1B-XHR

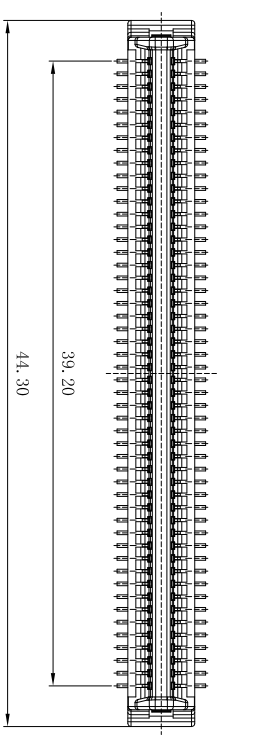

(公母合高)

X方向浮动量: ±0.5  
Y方向浮动量: ±0.5  
Z方向浮动量: ±0.5

RECOMMENDED PCB LAYOUT  
TOLERANCE: ±0.05mm

- 备注:
1. 塑胶材料: LCP, 黑色, 防火等级: UL 94v-0
  2. 端子材料: 铜合金
  3. 额定电压: 50V AC/DC for 1 minute
  4. 接触电阻: 50mΩ max. initial (不包括导体阻抗)
  5. 耐电压: 500V AC for 1 minute
  6. 绝缘电阻: 100MΩ min.
  7. 额定电流: 0.5A
  8. 寿命: 30次 min
  9. 插入力: 150gf max./pin, 拔出力: 8.5gf min./pin
  10. 保持力: 250gf 最小/pin
  11. 有害物质需符合RoHS2.0标准。
  12. 尺寸符合ANSI Y14.5M-1994。

料号说明:  
BB41-XXJT-1B-XHR

G: 公母合高13.75mm-14.75mm  
Pin数











		TOLERANCE UNLESS OTHERWISE SPECIFIED		SCALE		ORIGINAL DRAWN:		DATE		DWG. NO.		TITLE		REV.	
X.X	±0.35	X.	±5°	UNIT	1:1	CHECK:	Qinghua Fu	2021/06/10	600-0000-0575	0.80mm Pitch 浮动BIB		客户图		1	
X.XX	±0.20	X.X	±3°	SIZE	A4	APPROVE:	Guangyu Guo	2021/06/10	PARTS NO. (INTENDED USE)	BB41-XXJT-1B-XHR		SHEET		1/2	
X.XXX	±0.2°	X.XX	±2°				Adv Zhou	2021/06/10							

Shenzhen Shenhai Weixiang Electronics Co., Ltd.


40PIN: BB41-40JT-1B-XHR

60PIN: BB41-60JT-1B-XHR


80PIN: BB41-80JT-1B-XHR

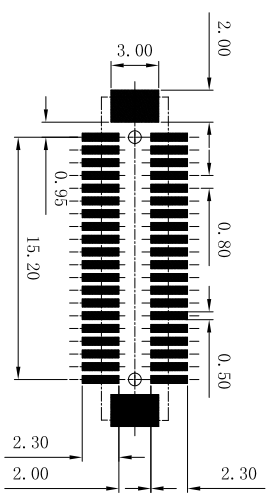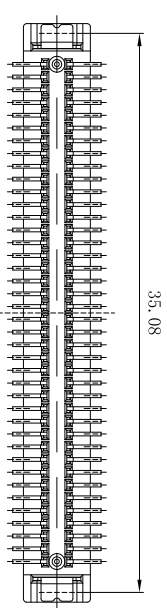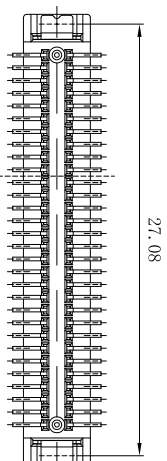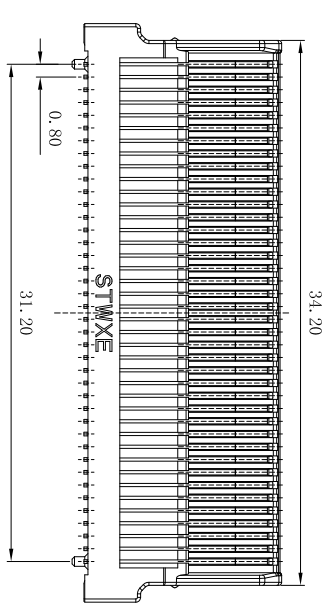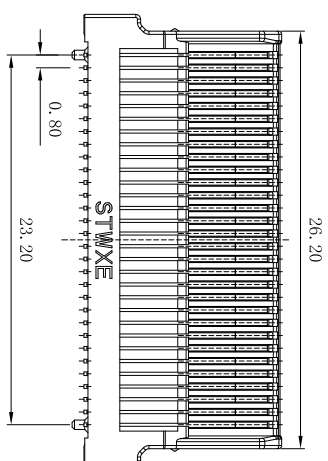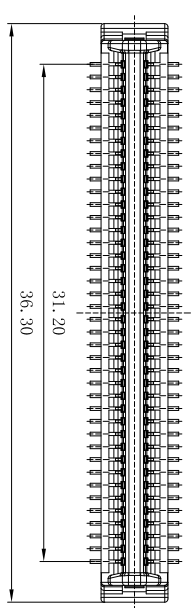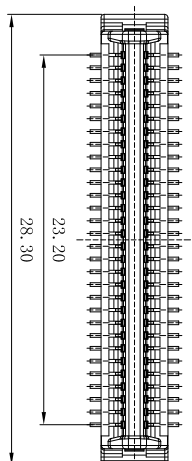

RECOMMENDED PCB LAYOUT  
TOLERANCE: ±0.05mm

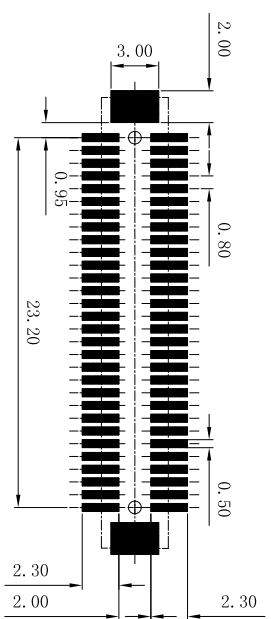

RECOMMENDED PCB LAYOUT  
TOLERANCE: ±0.05mm

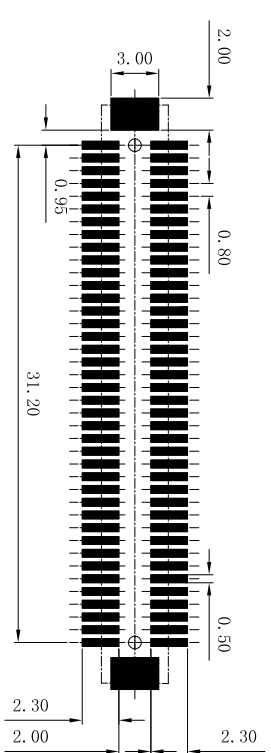

RECOMMENDED PCB LAYOUT  
TOLERANCE: ±0.05mm



Shenzhen Shentai Weixiang Electronics Co., Ltd.

TOLERANCE UNLESS OTHERWISE SPECIFIED

X.X	±0.35	X.	±5°
X.XX	±0.20	X.X	±3°
X.XXX		X.XX	±2°

SCALE 1:1

UNIT	mm
SIZE	A4

ORIGINAL DRAWN: Qinghua Fu

CHECK: Guangyu Guo  
APPROVE: Adv Zhou

DATE 2021/06/10

DATE 2021/06/10  
DATE 2021/06/10

DWG. NO. 600-0000-0575

PARTS NO. (INTENDED USE) BB41-XXJT-1B-XHR

TITLE 0.80mm Pitch 浮动BIB 客户图

SHEET 2/2

REV. 1

SHEET 2/2