



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.03	阿树

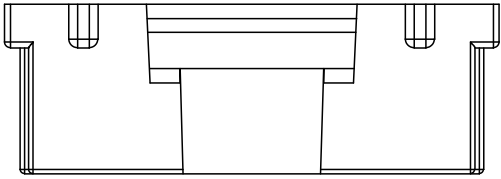

11P~30P







02P~10P

- SPECIFICATIONS
- Voltage rating:150V AC/DC
 - Current rating:1A AC/DC
 - Withstanding Voltage:500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥500MΩ
 - Contact resistance:≤30mΩ

PART NO.:

X9862 H-XX A-N0
① ② ③ ④ ⑤

- ①Series No
②Category:H-HSG
③Row No.Pin No:XX-02~30Pin
④Special N0:A-With Lock
⑤Material:N0-Nylon 66 UL 94V-0

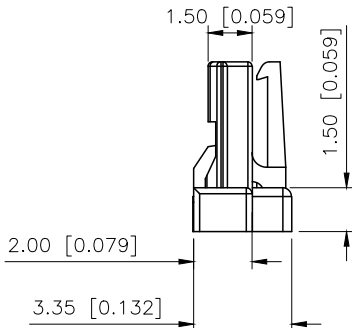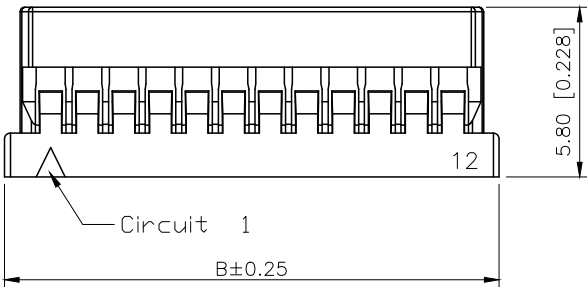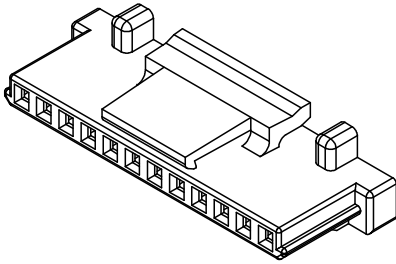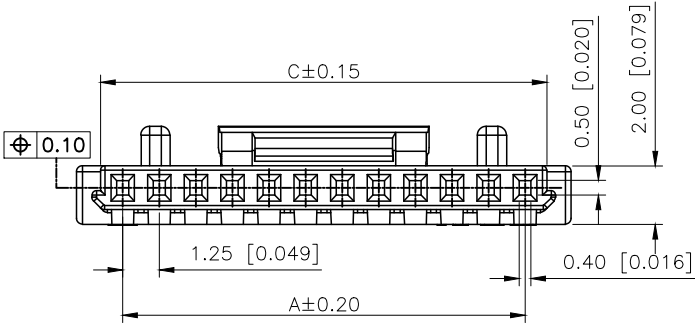

Poles	Dimensions(mm)		
	A	B	C
02	1.25	4.40	2.75
03	2.50	5.65	4.00
04	3.75	6.90	5.25
05	5.00	8.15	6.50
06	6.25	9.40	7.75
07	7.50	10.65	9.00
08	8.75	11.90	10.25
09	10.00	13.15	11.50
10	11.25	14.40	12.75
11	12.50	15.65	14.00
12	13.75	16.90	15.25
13	15.00	18.15	16.50
14	16.25	19.40	17.75
15	17.50	20.65	19.00
20	23.75	26.90	25.25
25	30.00	33.15	31.50
30	36.25	39.40	37.75

X9862H-XXA-N0	Nylon 66 UL 94V-0	X9862W-A	X9862T-A
PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 1.25mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X9862H-XXA-N0
APPROVED		SIZE:	A4	DWG NO.: