

# **Description**

The T2N7002BK,LM uses advanced trench technology to provide excellent  $R_{DS(ON)}$ , low gate charge and operation with gate voltages as low as 4.5V. This device is suitable for use as a

Battery protection or in other Switching application.




**SOT-23** 

#### **General Features**

 $V_{DS} = 60V I_{D} = 0.3A$ 

 $R_{DS(ON)} < 2\Omega$  @  $V_{GS}=10V$ 

ESD Rating: HBM ≥ 2000V



N-Channel MOSFET

## **Application**

Battery protection

Load switch


Uninterruptible power supply

## **Package Marking and Ordering Information**

Product ID	Pack	Marking	Qty(PCS)
T2N7002BK,LM	SOT-23	72K/7002	3000

## Absolute Maximum Ratings (T<sub>C</sub>=25°Cunless otherwise noted)

Symbol	Parameter	Limit	Unit	
Vos	Drain-Source Voltage		60	V
V <sub>G</sub> S	Gate-Source Voltage	Gate-Source Voltage		V
	Continuous Drain Current (T」=150℃)	T <sub>A</sub> =25℃	0.3	
l <sub>D</sub>		T <sub>A</sub> =100°C	0.19	A
Ідм	Drain Current-Pulsed (Note 1)		0.8	А
P <sub>D</sub>	Maximum Power Dissipation	0.35	W	
TJ,Tstg	Operating Junction and Storage Temperature Range		-55 To 150	$^{\circ}$
Reja	Thermal Resistance,Junction-to-Ambient (	350	°C/W	




## Electrical Characteristics (T<sub>A</sub>=25 ℃unless otherwise noted)


Parameter	Symbol	Condition	Min	Тур	Max	Unit
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	V <sub>GS</sub> =0V I <sub>D</sub> =250µA	60	68	-	V
Zero Gate Voltage Drain Current	IDSS	V <sub>DS</sub> =60V,V <sub>GS</sub> =0V	-	-	1	μΑ
Gate-Body Leakage Current	Igss	V <sub>GS</sub> =±10V,V <sub>DS</sub> =0V	-	±100	±500	nA
		V <sub>GS</sub> =±20V,V <sub>DS</sub> =0V	-	±4	±10	uA
Gate Threshold Voltage	VGS(th)	V <sub>DS</sub> =V <sub>GS</sub> ,I <sub>D</sub> =250μA	0.7	1.2	1.9	V
		V <sub>GS</sub> =5V, I <sub>D</sub> =0.1A	-	1.3	3	Ω
Drain-Source On-State Resistance	RDS(ON)	V <sub>GS</sub> =10V, I <sub>D</sub> =0.1A	-	1	2	Ω
Forward Transconductance	grs	V <sub>DS</sub> =10V,I <sub>D</sub> =0.2A	0.1	-	-	S
Input Capacitance	C <sub>lss</sub>		-	21	50	PF
Output Capacitance	Coss	$V_{DS}$ =25V, $V_{GS}$ =0V, F=1.0MHz	-	11	25	PF
Reverse Transfer Capacitance	C <sub>rss</sub>	1 – 1.0IVII 12	-	4.2	5	PF
Turn-on Delay Time	td(on)		-	10	-	nS
Turn-on Rise Time	t <sub>r</sub>	V <sub>DD</sub> =30V,I <sub>D</sub> =0.2A	-	50	-	nS
Turn-Off Delay Time	td(off)	V <sub>GS</sub> =10V,R <sub>GEN</sub> =10Ω	-	17	-	nS
Turn-Off Fall Time	t <sub>f</sub>		-	10	-	nS
		V <sub>DS</sub> =10V,I <sub>D</sub> =0.3A,				
Total Gate Charge	Qg	V <sub>GS</sub> =4.5V	-	1.7	3	nC
Diode Forward Voltage (Note 3)	Vsp	V <sub>GS</sub> =0V,I <sub>S</sub> =0.2A	-	-	1.2	V
Diode Forward Current (Note 2)	Is		-	-	0.3	Α

### Notes:

- 1. Repetitive Rating: Pulse width limited by maximum junction temperature.
- 2. Surface Mounted on FR4 Board, t ≤ 10 sec.
- **3.** Pulse Test: Pulse Width ≤ 300µs, Duty Cycle ≤ 2%.
- 4. Guaranteed by design, not subject to production



# **Typical Electrical And Thermal Characteristics**



**Figure 1:Switching Test Circuit** 

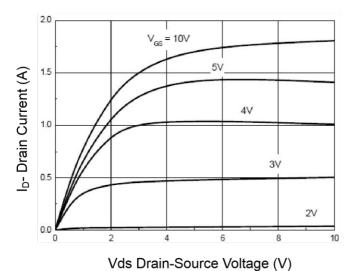


Figure 3 Output Characteristics

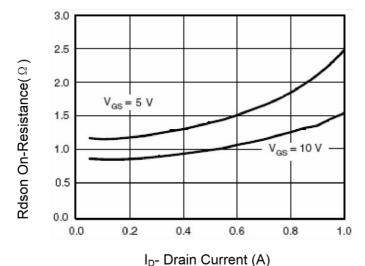


Figure 5 Drain-Source On-Resistance




Figure 2:Switching Waveforms



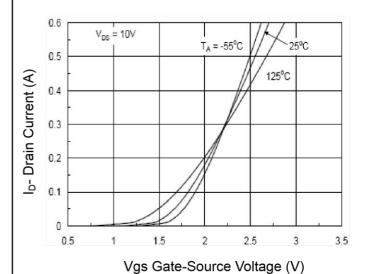



Figure 4 Transfer Characteristics




Vgs Gate-Source Voltage (V)
Figure 6 Rdson vs Vgs

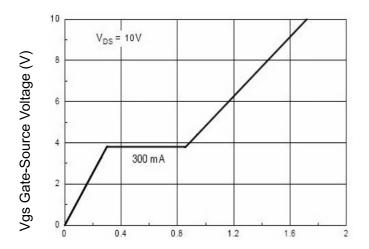

Qg Gate Charge (nC) Figure 7 Gate Charge



 $T_J$ -Junction Temperature( ${}^{\circ}C$ )
Figure 9 Drain-Source On-Resistance

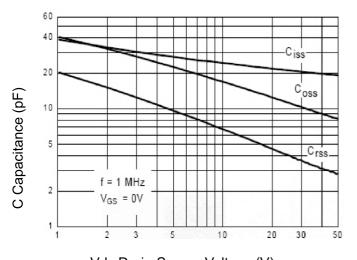

Vds Drain-Source Voltage (V)
Figure 11 Capacitance vs Vds



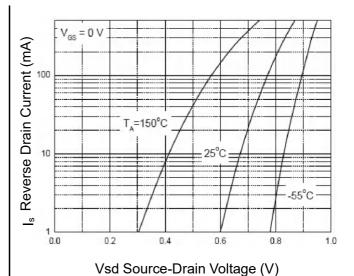


Figure 8 Source-DrainDiode Forward



Vds Drain-Source Voltage (V)


Figure 10 Safe Operation Area

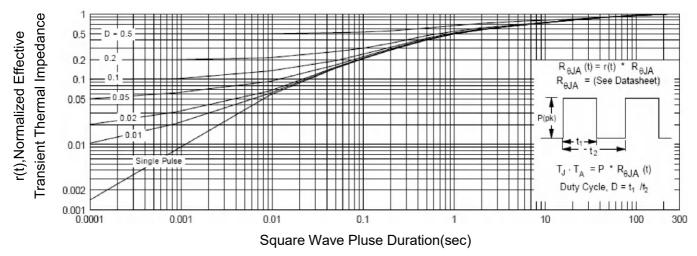



**Figure 12 Normalized Maximum Transient Thermal Impedance** 



# **SOT-23 Package Outline Dimensions**








Symbol	Dimensions In Millimeters		Dimensions In Inches		
	Min	Max	Min	Max	
Α	0.900	1.150	0.035	0.045	
A1	0.000	0.100	0.000	0.004	
A2	0.900	1.050	0.035	0.041	
b	0.300	0.500	0.012	0.020	
С	0.080	0.150	0.003	0.006	
D	2.800	3.000	0.110	0.118	
E	1.200	1.400	0.047	0.055	
E1	2.250	2.550	0.089	0.100	
е	0.950	0 TYP 0.037 TYP		7 TYP	
e1	1.800	2.000	0.071	0.079	
L	0.550	REF	0.022 REF		
L1	0.300	0.500	0.012	0.020	
θ	0°	8°	0°	8°	

# **SOT-23 Suggested Pad Layout**



- Note:
  1.Controlling dimension:in millimeters.
- 2.General tolerance:± 0.05mm.
  3.The pad layout is for reference purposes only.



### **Attention**

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.

  HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.