

# 1560-1602 MHz GNSS ANTENNA

## Standard Antenna Solutions

Part Number: 2118900-1

### PRODUCT FACTS:

- Small and lightweight
- Available in tape & reel for automatic mounting
- RoHS compliant


### RECOMMENDATIONS:

- Minimum matching circuits required
- Bandwidth and performance is dependent on ground plane size. The following data was measured with 100mm ground size.
- PCB ground is to be on top layer


### SPECIFICATIONS:

- Frequency Range: 1560-1602 MHz
- Peak Gain: See the below chart
- VSWR: <2.0:1
- Polarization: Linear
- Azimuth Beam Width: Omni directional
- Power Handling: 3 Watt cw
- Feed Point Impedance: 50 ohms
- Size: 10mm x 10mm x 1mm
- Weight: <0.5g
- Mounting: Surface-mount technology
- Keep Out Area: See diagram on page 3
- Operating Temperature: -40° to 85°C


### TEST ORIENTATION IN FREE SPACE:




### VSWR:

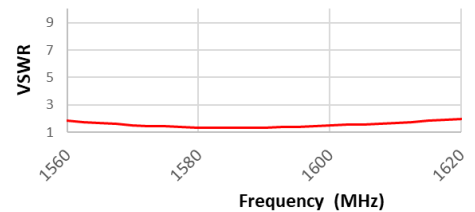


### AZIMUTH:

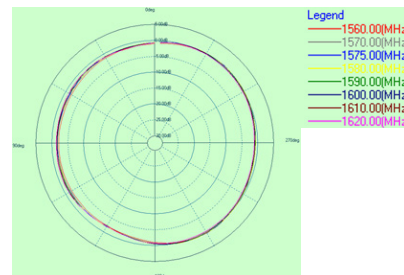

### ELEVATION:

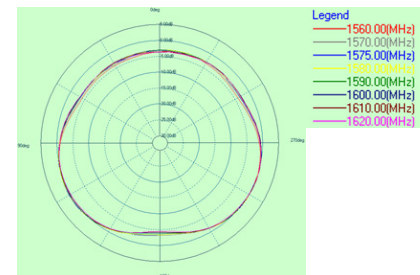



### EFFICIENCY:

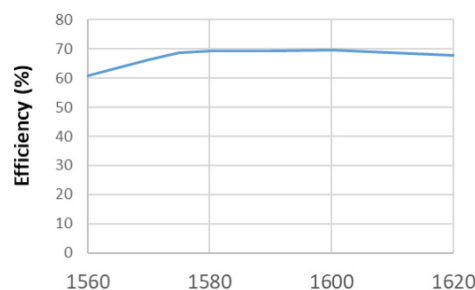

# 1560-1602 MHz GNSS Antenna

Standard Antenna Solutions




## MOUNTING GUIDE:

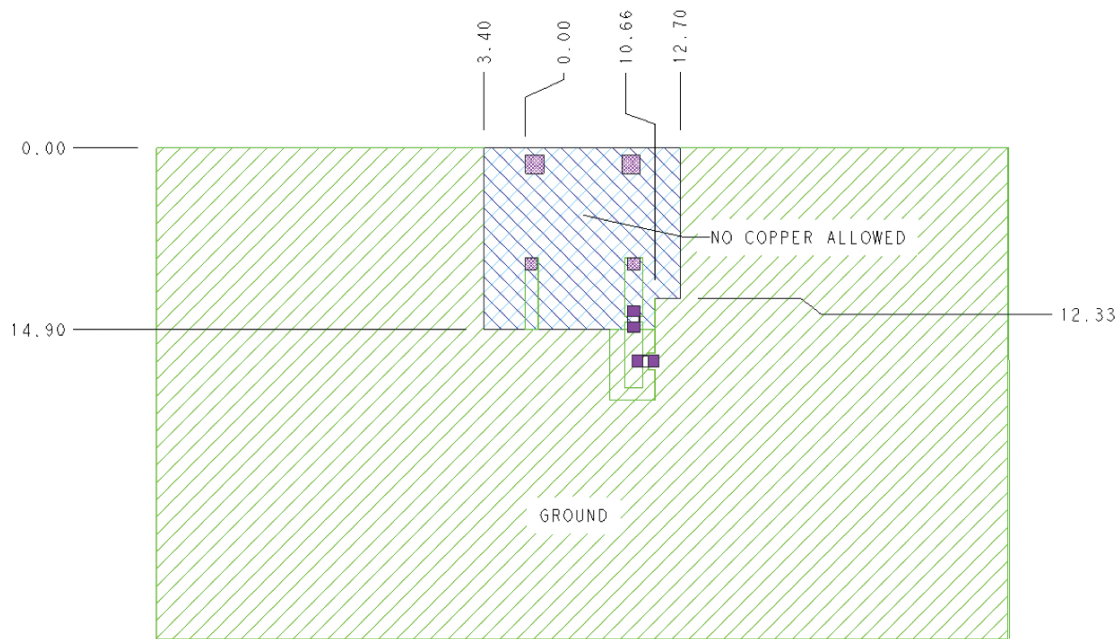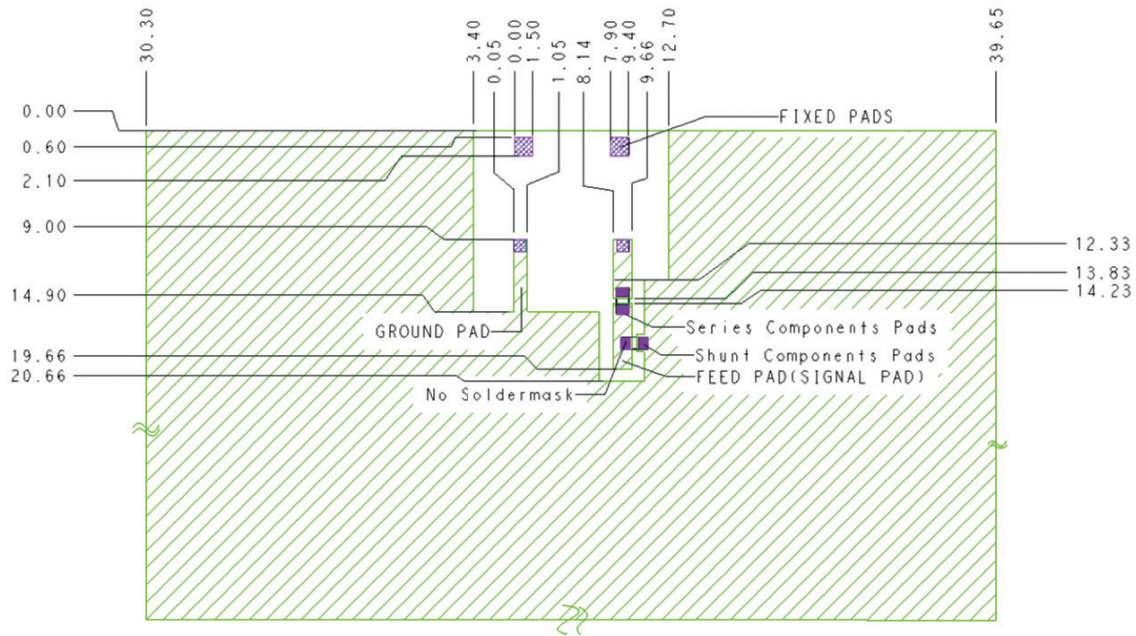

# 1560-1602 MHz GNSS Antenna

Standard Antenna Solutions

## KEEP OUT AREA:

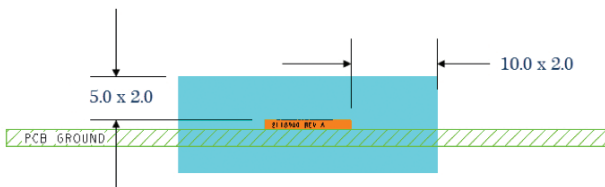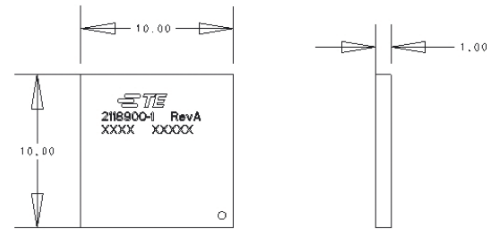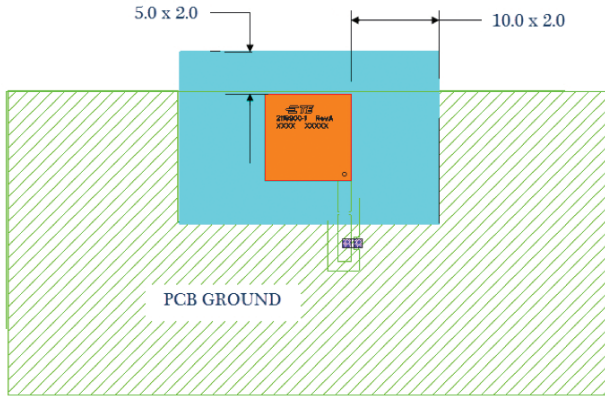

## TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

For phone numbers in other countries, go to [te.com/support-center](http://te.com/support-center)

## te.com

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2019 TE Connectivity Ltd. family of companies All Rights Reserved.

1-1773969-5 01/19 Original