SIEMENS

Data sheet 3RT2626-1AP05



Capacitor contactor, AC-6b 20 kVAr, / 400 V 1 NO + 2 NC, 230 V AC, 50 Hz 3-pole, Size S0 screw terminal

product brand name	SIRIUS
product designation	capacitor contactors
product type designation	3RT26
General technical data	
size of contactor	S0
product extension auxiliary switch	No
surge voltage resistance	
 of main circuit rated value 	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for safe isolation between coil and main contacts acc. to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	8,3g / 5 ms, 5,3g / 10 ms
shock resistance with sine pulse	
• at AC	13,5g / 5 ms, 8,3g / 10 ms
mechanical service life (switching cycles)	
 of the contactor with added auxiliary switch block typical 	3 000 000
electrical endurance (switching cycles)	200 000
reference code acc. to IEC 81346-2	Q
Substance Prohibitance (Date)	01.05.2014 00:00:00
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
 ambient temperature during operation 	-25 +60 °C
ambient temperature during storage	-55 +80 °C
Main circuit	
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
operational current at AC-6b at 690 V at ambient temperature 60 °C rated value	29 A
operating reactive power at AC-6b	
 at 230 V at 50/60 Hz at ambient temperature 60 °C rated value 	4 11.5 kvar
 at 400 V at 50/60 Hz at ambient temperature 60 °C rated value 	7 20 kvar
 at 500 V at 50/60 Hz at ambient temperature 60 °C rated value 	8 25 kvar
 at 690 V at 50/60 Hz at ambient temperature 60 °C rated value 	11 34 kvaг

no load awitching fraguency	
no-load switching frequency	E00.1/b
• at AC	500 1/h
operating frequency at AC-6b • at 230 V maximum	100 1/b
	100 1/h
• at 240 V maximum	100 1/h
• at 400 V maximum	100 1/h
• at 480 V maximum	100 1/h
at 500 V maximum	100 1/h
• at 600 V maximum	100 1/h
at 690 V maximum	100 1/h
Control circuit/ Control	
type of voltage	AC
type of voltage of the control supply voltage	AC
 control supply voltage at AC at 50 Hz rated value 	230 V
control supply voltage frequency	
• 1 rated value	50 Hz
operating range factor control supply voltage rated value of magnet coil at AC	
● at 50 Hz	0.8 1.1
apparent pick-up power of magnet coil at AC	77 V·A
inductive power factor with closing power of the coil	0.82
apparent holding power of magnet coil at AC	9.8 V·A
inductive power factor with the holding power of the	0.25
coil	
closing delay	
• at AC	8 40 ms
arcing time	10 15 ms
residual current of the electronics for control with	
signal <0>	
 at AC at 230 V maximum permissible 	7 mA
Auxiliary circuit	
	2
Auxiliary circuit	
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact	2
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable	2 0
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact	2 0 2
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts	2 0 2 1
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable	2 0 2 1 0
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12	2 0 2 1 0
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum	2 0 2 1 0
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V • at 400 V	2 0 2 1 0 1 10 A
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V	2 0 2 1 0 1 10 A
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V • at 400 V	2 0 2 1 0 1 10 A
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V • at 400 V operational current of auxiliary contacts at DC-13	2 0 2 1 0 1 10 A
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V • at 400 V operational current of auxiliary contacts at DC-13 • at 24 V	2 0 2 1 0 1 10 A
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V • at 400 V operational current of auxiliary contacts at DC-13 • at 24 V • at 60 V	2 0 2 1 0 1 10 A 6 A 3 A
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V • at 400 V operational current of auxiliary contacts at DC-13 • at 24 V • at 60 V • at 110 V	2 0 2 1 0 1 10 A 6 A 3 A
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V • at 400 V operational current of auxiliary contacts at DC-13 • at 24 V • at 60 V • at 110 V • at 125 V	2 0 2 1 0 1 10 A 6 A 3 A 6 A 2 A 1 A 0.9 A
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V • at 400 V operational current of auxiliary contacts at DC-13 • at 24 V • at 60 V • at 110 V • at 125 V • at 220 V	2 0 2 1 0 1 10 A 6 A 3 A 6 A 2 A 1 A 0.9 A 0.3 A
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V • at 400 V operational current of auxiliary contacts at DC-13 • at 24 V • at 60 V • at 110 V • at 125 V • at 220 V contact reliability of auxiliary contacts	2 0 2 1 0 1 10 A 6 A 3 A 6 A 2 A 1 A 0.9 A 0.3 A
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V • at 400 V operational current of auxiliary contacts at DC-13 • at 24 V • at 60 V • at 110 V • at 125 V • at 220 V contact reliability of auxiliary contacts UL/CSA ratings	2 0 2 1 0 1 10 A 6 A 3 A 6 A 2 A 1 A 0.9 A 0.300000001
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V • at 400 V operational current of auxiliary contacts at DC-13 • at 24 V • at 60 V • at 110 V • at 125 V • at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL Short-circuit protection	2 0 2 1 0 1 10 A 6 A 3 A 6 A 2 A 1 A 0.9 A 0.300000001
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V • at 400 V operational current of auxiliary contacts at DC-13 • at 24 V • at 60 V • at 110 V • at 125 V • at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL	2 0 2 1 0 1 10 A 6 A 3 A 6 A 2 A 1 A 0.9 A 0.300000001
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V • at 400 V operational current of auxiliary contacts at DC-13 • at 24 V • at 60 V • at 110 V • at 125 V • at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit with	2 0 2 1 0 1 10 A 6 A 3 A 6 A 2 A 1 A 0.9 A 0.3 A 0.00000001
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V • at 400 V operational current of auxiliary contacts at DC-13 • at 24 V • at 60 V • at 110 V • at 125 V • at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit with type of coordination 1 required • for short-circuit protection of the auxiliary switch	2 0 2 1 0 1 10 A 6 A 3 A 6 A 2 A 1 A 0.9 A 0.3 A 0.00000001 A600 / Q600
Auxiliary circuit number of NC contacts for auxiliary contacts • attachable • instantaneous contact number of NO contacts for auxiliary contacts • attachable • instantaneous contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-15 • at 230 V • at 400 V operational current of auxiliary contacts at DC-13 • at 24 V • at 60 V • at 110 V • at 125 V • at 220 V contact reliability of auxiliary contacts UL/CSA ratings contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit with type of coordination 1 required • for short-circuit protection of the auxiliary switch required	2 0 2 1 0 1 10 A 6 A 3 A 6 A 2 A 1 A 0.9 A 0.3 A 0.00000001 A600 / Q600

	forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
height	135 mm
width	45 mm
depth	155 mm
required spacing	
 with side-by-side mounting at the side 	10 mm
 for grounded parts at the side 	10 mm
onnections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	
 for main contacts 	
— solid	2x (1 2.5 mm²), 2x (2.5 10 mm²)
— stranded	2x (1 2.5 mm²), 2x (2.5 10 mm²)
— solid or stranded	2x (1 2,5 mm²), 2x (2,5 10 mm²)
 finely stranded with core end processing 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
 at AWG cables for main contacts 	2x (16 12), 2x (14 8)
type of connectable conductor cross-sections	
 for auxiliary contacts 	
— solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²
— solid or stranded	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 at AWG cables for auxiliary contacts 	2x (20 16), 2x (18 14), 2x 12
type of minimum connectable cross-section for main contacts at AC-6b	
• at 40 °C	1x 10 mm²
• at 60 °C	2x 10 mm²
AWG number as coded connectable conductor cross section for main contacts	16 8
afety related data	
product function	
 mirror contact acc. to IEC 60947-4-1 	No
 positively driven operation acc. to IEC 60947-5-1 	No
protection class IP on the front acc. to IEC 60529	IP20
touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front

General Product Approval

EMC

Declaration of Conformity













Declaration of Conformity

Test Certificates

Marine / Shipping

other

Miscellaneous

Type Test
Certificates/Test
Report



Confirmation



Further informatior

Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2626-1AP05

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2626-1AP05

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$


https://support.industry.siemens.com/cs/ww/en/ps/3RT2626-1AP05


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2626-1AP05/char


Further characteristics (e.g. electrical endurance, switching frequency)


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2626-1AP05&objecttype=14&gridview=view1



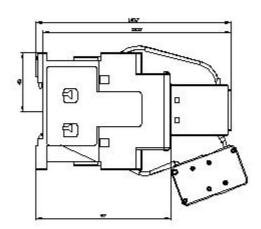



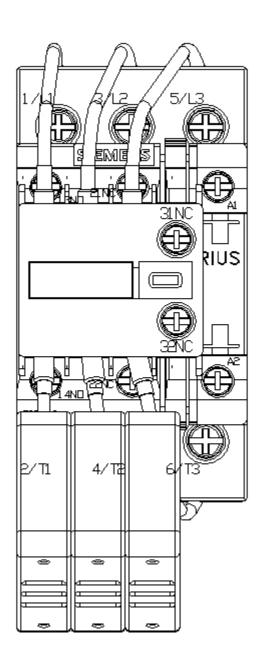

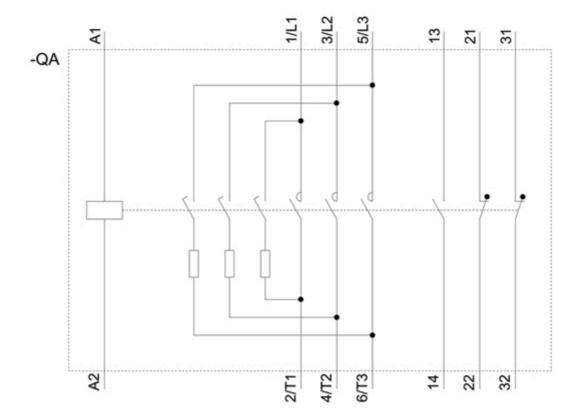

last modified: 12/15/2020 🖸