



USED ON

DWG NO 1616131-4
THIS DRAWING IS A CONTROLLED DOCUMENT

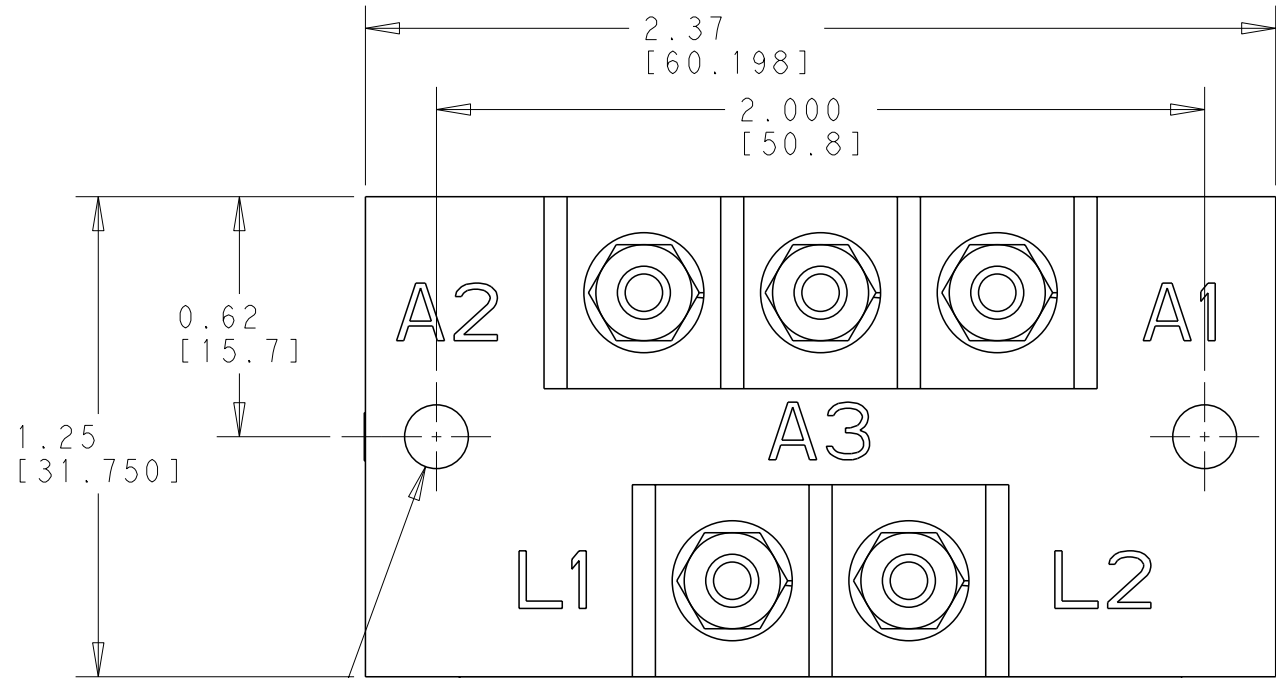

Ø0.166 [4.2164]
2 HOLES


6-32 UNC-2A
5 REQ'D

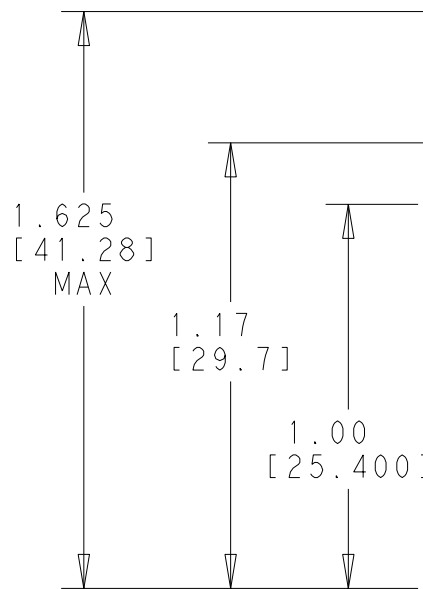

PART NO.
OPERATE AMPS
SERIAL NO.
HARTMAN ELEC. MFG.

OPERATING CHARACTERISTICS

OPERATING VOLTAGE 28 VDC
PICK UP .3 AMPS MAX.
DROPOUT .1 AMPS MIN.
CONTINUOUS 2 AMPS DC
OVERLOAD 10 AMP FOR 5 SEC.
OUTPUT-SPDT .2 AMP RES 28 VDC
TEMP. -55°C TO +71°C
MAX. WEIGHT 5 OZ
LAMP LOAD .08 AMP
ALTITUDE 60,000FT MAX.

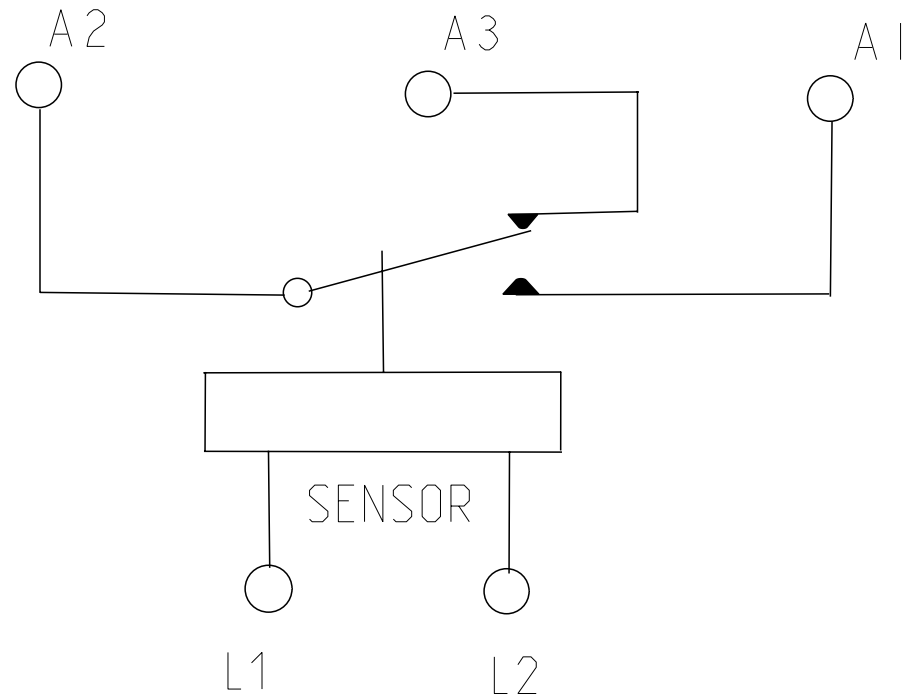

5	1	39529-024	OVERLAY			1-1616283-9	
4	5	51806-014	WASHER LOCK #6 SPLIT			1616360-7	BRONZE
3	5	50406-034	NUT 6-32 X 1/4 X 3/32 HEX			5-1616337-3	BRASS
2	1	38481-010	RELAY ASSEMBLY PRIMARY			3-1616278-8	
1	1	34246-001	PLATE - NAME			6-1616928-7	
FIND NO	QTY REQD	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	DRAWING OR SPECIFICATION	FSCM NO	TE PART NO	MATERIAL OR NOTE

CAGE CODE: 76043		DWN 05AUG2016		MATERIAL BC 3376		HEAT TREAT	
Hartman Division 175 N. DIAMOND STREET MANSFIELD, OHIO 44902		MR 05AUG2016					
CHK RV 05AUG2016		APVD 05AUG2016					
DWA		NAME RELAY-CURRENT INDICATOR		Q-50AC			
SCALE NONE		SIZE A3		DRAWING NO 1616131-4		SHEET 1 OF 1	
SURFACE TEXTURE						REV G	

G	SEE ECO 16-006506; REDRAWN	27APR2016	MR	DWA
LTR	REVISION RECORD	DATE	DWN	APVD