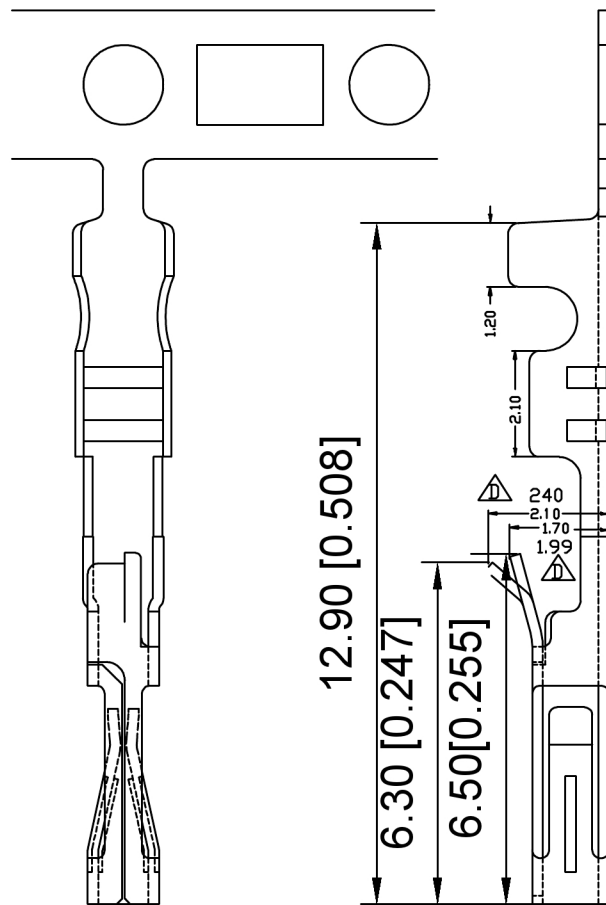


Specifications:

规格:

Voltage rating: 250V AC/DC

额定电压: 250V AC/DC

Current rating: 3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage: 1500V AC/minute

耐受电压: 1500V AC/分钟

Temperature range: -25°C~+85°C

温度范围: -25°C~+85°C

Insulation resistance: $\geq 1000M\Omega$

绝缘电阻: $\geq 1000M\Omega$

Contact resistance: $\leq 20m\Omega$

接触电阻: $\leq 20m\Omega$

After environmental testing: $\leq 30m\Omega$

环境测试后: $\leq 30m\Omega$

X9555 T -P SN-A

① ② ③ ④ ⑤

1. Series Number

2. Category: T-terminal

3. Material: P-Phosphor bronze

4. Plating style: G01-Contact Gold Flash

SN-Bright tin plating

5. Other Types: A-Tight Type (紧端)

X9555T-PSN-A	Phosphor Bronze	AWG#22-26	Stamping Before Pating: 30u"Ni; Contact Area Gold Flash	X9555H
PART NO	Material	Wire Range	Finish	Suitable XKB Terminal

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW:	PART NO.: X9555T-PSN-A
CHKD	UNIT: mm/in	DWG NO.: X-X9555T-PSN-A
APPD	SIZE: A4	WEIGHT
		SHEET 1/1
		REVISION A0

XKB

XKB INDUSTRIAL PRECISION CO., LIMITED

广东星坤科技股份有限公司

生效

ΔX

ΔX

ΔX

日期

文件工程章

					ANGULAR	±5°
					L ≤ 4	±0.2
					4<L ≤ 16	±0.3
					16<L ≤ 63	±0.4
DESCRIPTION		DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						