

NOTES1:


- UL Standard
- 1. Rated voltage/current : 150V / 8A
- 2. Withstanding voltage : AC1250V/1Min.

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	320V
Rate current(A)	10A

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 2.54mm, Poles : N=04~48P
- 3. Operating temperature: -40°C~+105°C
- 4. Undimensioned tolerances:



Pitch range in mm	Nominal dimension range in mm		Tolerance
	Over	Under	
6 TO 10	6 TO 10	30 TO 60	0.1/10
10 TO 24	10 TO 24	30 TO 100	<
±0.15/±0.20	±0.30/±0.50	±0.70/±1.00	±2°

5. RoHS Compliance

Ordering Information





JL15EDGRHD-254 XX

XX

B

0

1

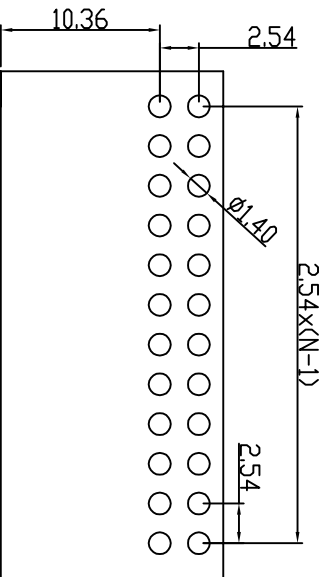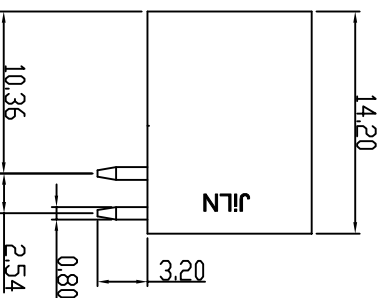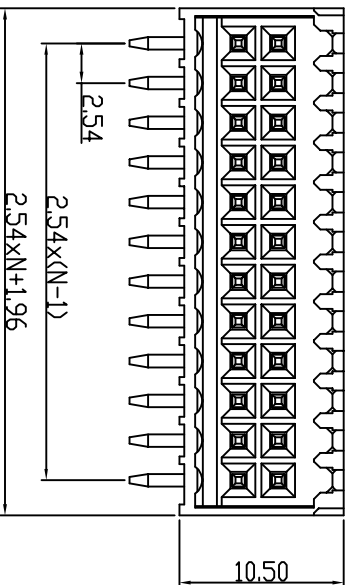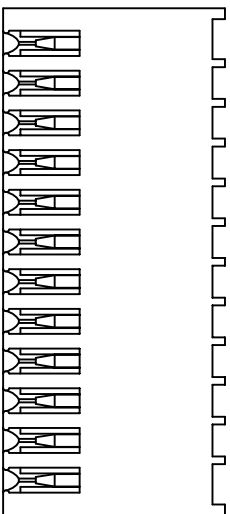

PCB LAYOUT

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE
A0		NEW	21.12.15

DRAW	SHUANGPING ZHENG		SCALE	FTT	PART NO.	JL15EDGRHD-254XXB01
	CHECK	LICHAD LIU	UNIT	mm		
APPROVE	YONGLIANG GAO		SIZE	A4	TITLE:	JL15EDGRHD-THR-2.54-2XNP插拔式公母弯针黑色
			SHEET	1/1		
			PRD.J.			

JILIN 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD