

T1C

FEATURES

- ※Miniature 2.8*1.95mm
- ※Side push mid-mount type
- ※300,000 operation life cycles
- ※Better soldering peeling strength
- ※Height from surface of PCB:0.975mm


APPLICATION

- ※Smart phone
- ※Medical
- ※Portable electronic device
- ※3C products

SPECIFICATION

| | |
|-----------------------|-----------------------------|
| Contact Rating | 10uA, 2V DC to 20mA, 15V DC |
| Contact Resistance | 500mΩ max. |
| Insulation Resistance | 50MΩ min. 100V DC |
| Dielectric Strength | 250V AC/1 minute |
| Operating Force | 160±50gf |
| Travel | 0.13mm |
| Operating Life | 300,000 cycles |
| Operating Temp. | -40°C ~ +85°C |
| Storage Temp. | -40°C ~ +85°C |

CIRCUIT

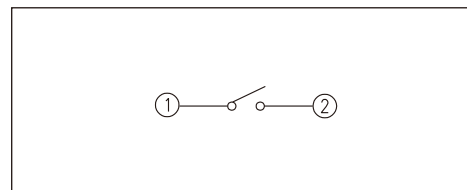

PACKAGE

<Tape & Reel>
5000 pcs

HOW TO ORDER




T1C □ QR

Package:
Tape & Reel

Halogen Free

Operating Force:
2=160gf

T1C

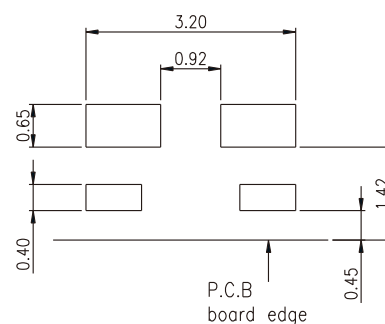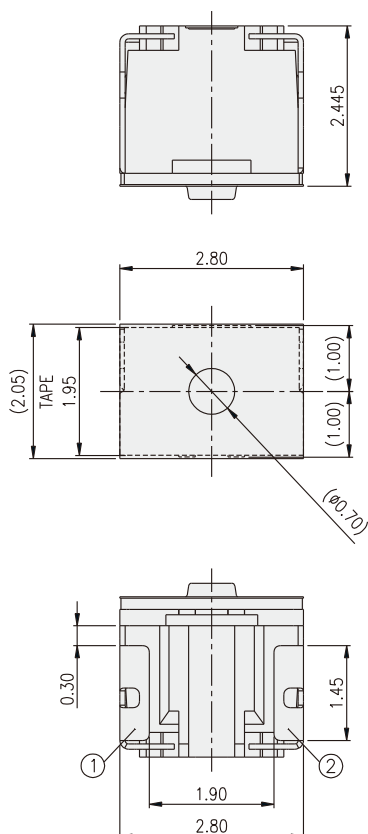

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diptronics:

T1C2QR