
964338-2 - ACTIVE

MAG-MATE

TE Internal #: 964338-2 Leaf, Mating Tab Width 3.4 mm [.134 in], Size 2, .27 – .4 mm Magnet Wire, 30 – 26 AWG Magnet Wire, MAG-MATE, Magnet Wire Terminals

View on TE.com >

Terminals & Splices > Magnet Wire Terminals

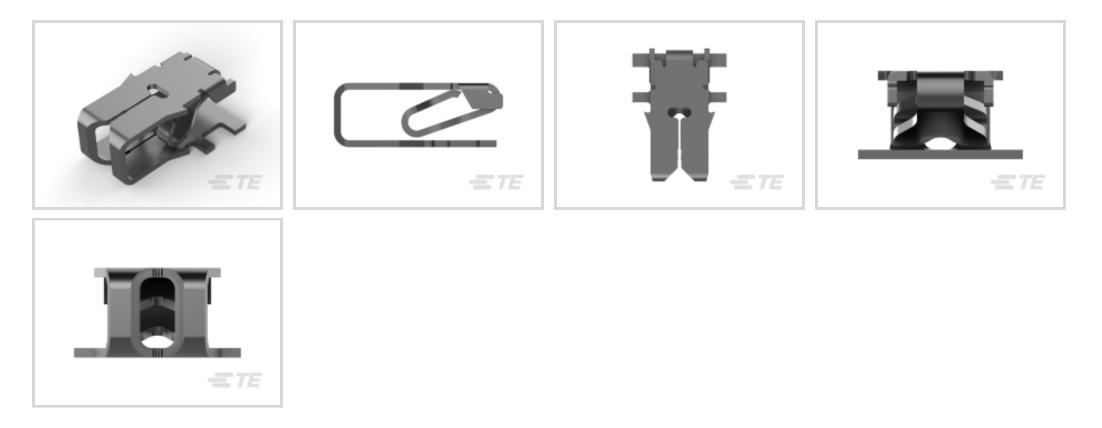

Magnet Wire Terminal Type: Leaf Mating Tab Width: 3.4 mm [.134 in] Mating Tab Thickness: .5 mm [.02 in] Compatible With Cavity Size: Size 2 Magnet Wire Size: 30 – 26 AWG

Features



Product Type Features

Compatible With Discrete Wire Type	Magnet Wire, Solid
Body Features	
Compatible With Cavity Size	Size 2
Contact Features	
Magnet Wire Terminal Type	Leaf
Mating Tab Width	3.4 mm[.134 in]
Mating Tab Thickness	.5 mm[.02 in]
Terminal Plating Material	Tin
Terminal Orientation	Twisted
Termination Features	
Termination Method to Wire & Cable	Insulation Displacement (IDC)
Dimensions	
Terminal Height	7.6 mm[.3 in]

964338-2

Leaf, Mating Tab Width 3.4 mm [.134 in], Size 2, .27 – .4 mm Magnet Wire, 30 – 26 AWG Magnet Wire, MAG-MATE, Magnet Wire Terminals



Magnet Wire Size	.27 – .4 mm
Stock Thickness (Magnet Wire Side)	.25 mm[.01 in]
Product Length	7.9 mm[.311 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-65 – 150 °C[-85 – 302 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Packaging Features	
Packaging Quantity	10000
Packaging Method	Reeled with Interleaving Paper
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


964338-2

Leaf, Mating Tab Width 3.4 mm [.134 in], Size 2, .27 – .4 mm Magnet Wire, 30 – 26 AWG Magnet Wire, MAG-MATE, Magnet Wire Terminals







Also in the Series MAG-MATE

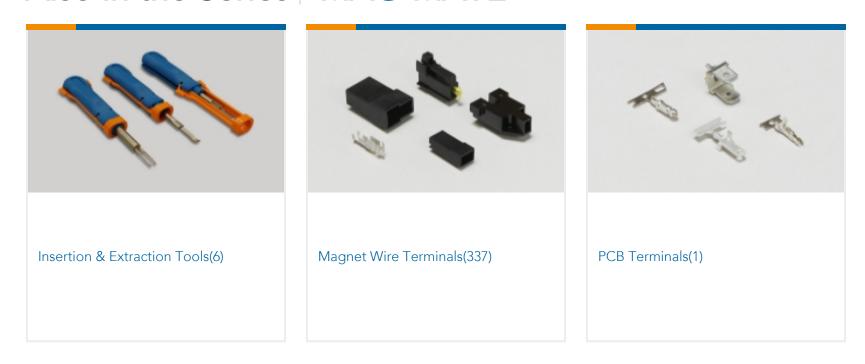


Customers Also Bought

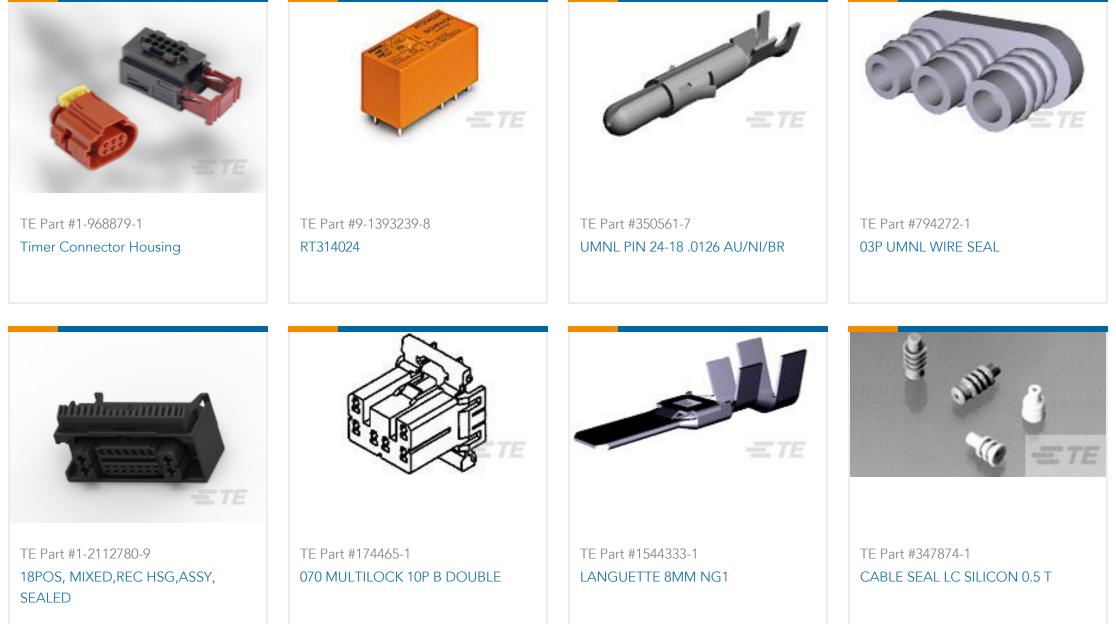



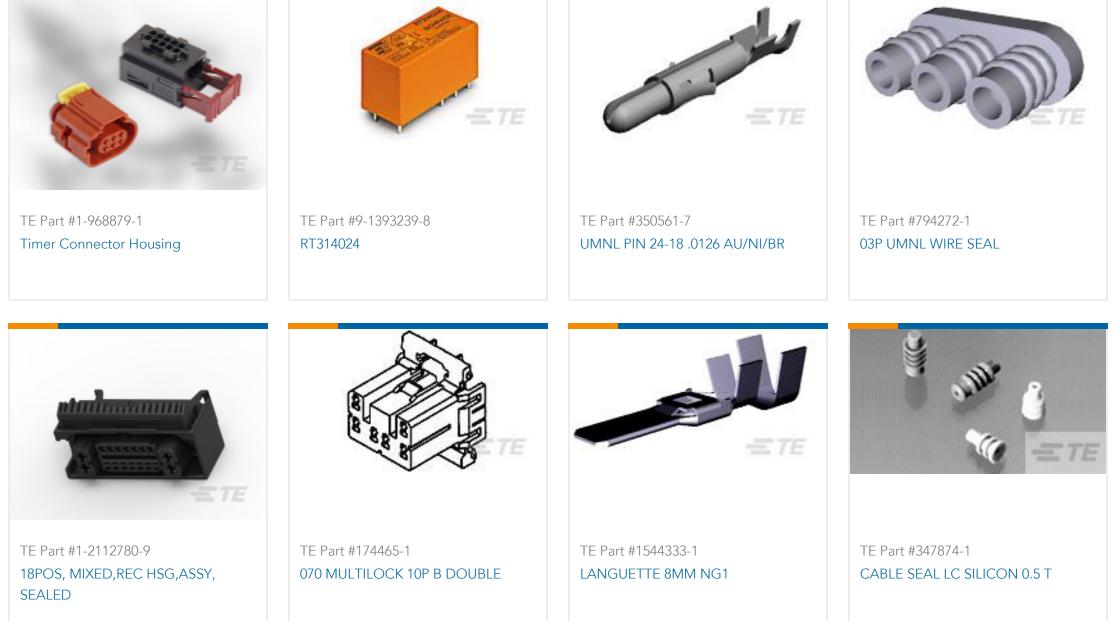

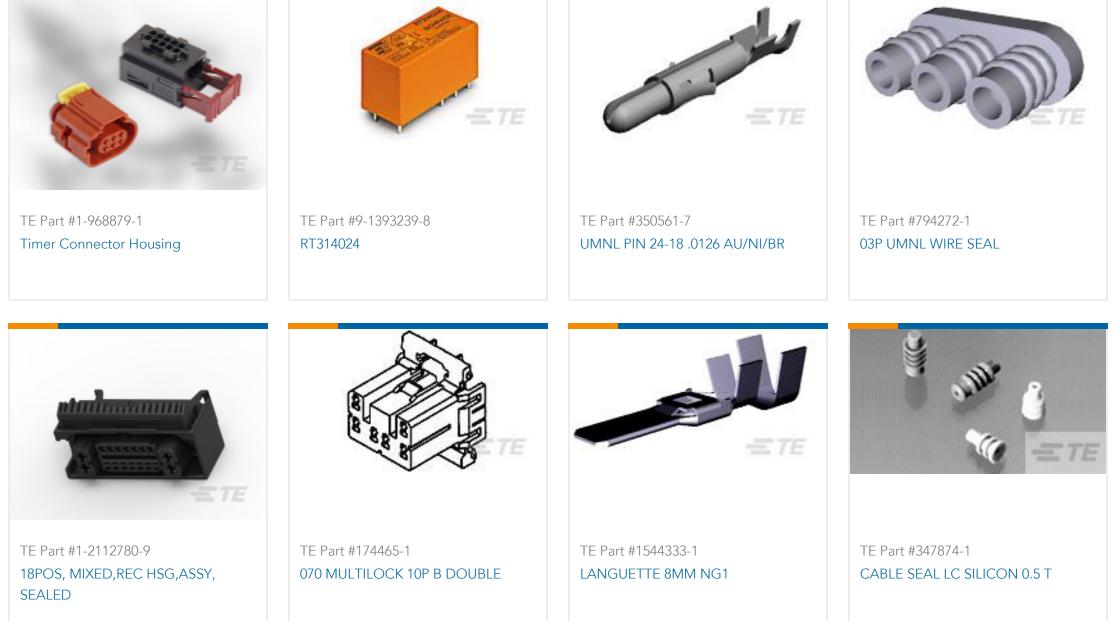

964338-2

Leaf, Mating Tab Width 3.4 mm [.134 in], Size 2, .27 – .4 mm Magnet Wire, 30 – 26 AWG Magnet Wire, MAG-MATE, Magnet Wire Terminals



TE Part #2338363-1 2P ECONOSEAL RECEPTACLE DBL

Documents

Product Drawings MAG MATE LEAF KONT

English

CAD Files

Customer View Model ENG_CVM_CVM_964338-2_C.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_964338-2_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_964338-2_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Magnet Wire Terminals & Splices

English

Product Specifications Application Specification

English