



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Board**

Number of Positions: **10**

Centerline (Pitch): **6.35 mm [.25 in]**

Features

Product Type Features

Rectangular Power Connector Type	Header
Connector & Housing Type	Plug
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	10
PCB Mount Orientation	Vertical
Number of Power Positions	10
Number of Rows	1

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Contact Features

Multiple Contact Types	Without
------------------------	---------



Contact Layout	Inline
Contact Mating Area Plating Material	Tin
Contact Current Rating (Max)	12 A
Contact Retention Within Housing	Without
Contact Type	Socket
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	120 – 200 µm[3 – 5 µin]

Termination Features

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Mechanical Attachment

Strain Relief	Without
Mating Alignment Type	Polarization
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Positive Lock
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	6.35 mm[.25 in]
Housing Color	Natural
Housing Material	PA 6.6

Dimensions

	.03 – .09 in
--	--------------

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

CSA Rating	Certified, LR 7189
UL Rating	Recognized



Compatible With Agency/Standards Products	CSA, UL, VDE
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0
Glow Wire Rating	GWT 750°C (Without Flame)

Packaging Features

Packaging Quantity	500
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 350834-1
06P UMNL HDR ASSY PC 94VO



TE Part # 350833-1
04P UMNL HDR ASSY PC 94VO



TE Part # 640900-1
05P UMNL PIN HDR ASSY 94VO



TE Part # 350828-1
09P UMNL HDR ASSY PC 94VO



TE Part # 350829-1
12P UMNL HDR ASSY PC 94VO



TE Part # 350826-1
04P UMNL HDR ASSY PC 94VO



TE Part # 826851-3
8P UN-MNL BU SOCK




TE Part # 350825-1
03P UMNL HDR ASSY PC 94VO



TE Part # 350833-4
04P UMNL HDR ASSY PC 94VO LF



TE Part # 350832-4
03P UMNL HDR ASSY PC 94VO LF

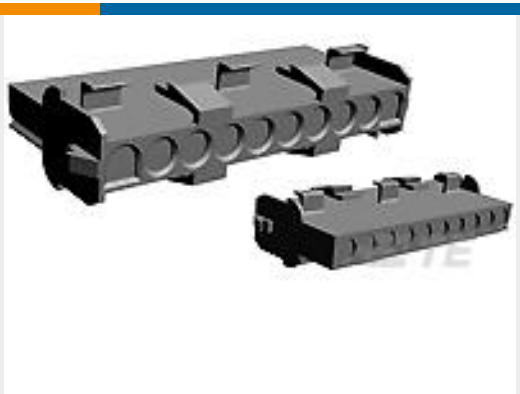

TE Part # 2178622-1
UMNL 10WAY CAP HOUSING

Also in the Series | Universal MATE-N-LOK



Circular Power Connectors(2)



Connector Caps & Covers(34)



Connector Contacts(209)



Connector Hardware(12)



Connector Seals & Cavity Plugs(27)



Connector Strain Relief(7)



Insertion & Extraction Tools(4)



Rectangular Connector Housings(1)




[Rectangular Power Connectors\(670\)](#)



[Standard Circular Connectors\(1\)](#)

Customers Also Bought

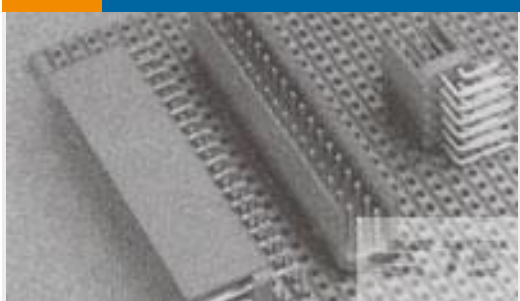

TE Part #281739-5
[HEADER HE14 STRAIGHT 2X5 P](#)



TE Part #1473005-1
[SEMI HARD TRAY DDR SOCKET 200P](#)



TE Part #1462038-2
[IM03CGR=IM RELAY 140mW 5V HDV](#)



TE Part #2176231-1
[3522 10R 1% 3W](#)



TE Part #641831-1
[06P UMNL PIN HDR ASSY 94VO](#)



TE Part #350759-4
[02P UMNL HDR ASSY PC V2 NATL](#)



TE Part #1-770166-0
[02P MINI-UMNL ASSY VO SNNI*](#)



TE Part #640901-1
[05P UMNL SOK HDR ASSY 94VO](#)



TE Part #292174-5
[CT BOX HDR V SMT 5P O/TAPE NAT](#)



TE Part #6489170-2
[CONN SEC II 30 POS 100C/L, S/L](#)

Documents

Product Drawings

[10P UN-MNL BU SOCK](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_826852-3_M.2d_dxf.zip](#)

English

[3D PDF](#)



3D

Customer View Model

[ENG_CVM_CVM_826852-3_M.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_826852-3_M.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL](#)

English