



M12 Rail PG Clamp

TE Internal #: 1-2312501-2

Cable-to-Cable, 5 Position, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), M12 Rail PG Clamp, Standard Circular Connectors

[View on TE.com >](#)

Connectors > Circular Connectors > Standard Circular Connectors > M12 Straight D4 PG Clamp



Connector System: **Cable-to-Cable**
Connector Mounting Type: **Cable Mount (Free-Hanging)**
Number of Positions: **5**
Sealable: **Yes**
Connector & Contact Terminates To: **Wire & Cable**

[All M12 Straight D4 PG Clamp \(12\)](#)

Features

Product Type Features

| | |
|-----------------------------------|----------------------|
| Product Type | Connector Assembly |
| Accessory Color | Black |
| Assembly Requirement | Factory Assembled |
| Assembly Type | Electrical Connector |
| Circular Connector Shell Type | Metal-Shell |
| Connector Product Type | Connector Assembly |
| Connector System | Cable-to-Cable |
| Sealable | Yes |
| Connector & Contact Terminates To | Wire & Cable |
| Circular Connector Type | Receptacle |
| Shell Type | Plastic |

Configuration Features

| | |
|--------|---|
| Keying | A |
|--------|---|



| | |
|----------------------------|-----|
| Number of Positions | 5 |
| Number of Power Positions | 0 |
| Number of Signal Positions | 5 |
| Contacts Preloaded | Yes |

Electrical Characteristics

| | |
|-------------------|--------|
| Operating Voltage | 50 VDC |
|-------------------|--------|

Body Features

| | |
|---|-------------------------------|
| Environmental Protection | Yes |
| Weight | 25 g[.0552 lb] |
| Environmental Protection Type | Elastomer Sealed |
| Shell Plating Material | Unplated |
| Shell Base Material | Plastic |
| Circular Connector Insulation Material Type | Low Fire Hazard Thermoplastic |
| Hermetically Sealed | Yes |

Contact Features

| | |
|---------------------------------|--------|
| Contact Current Rating (Max) | 4 A |
| Reverse Gender | Yes |
| Circular Connector Contact Type | Socket |

Mechanical Attachment

| | |
|-------------------------|----------------------------|
| Connector Mounting Type | Cable Mount (Free-Hanging) |
| Polarization Code | A |
| Mating Alignment Type | Keyed |

Housing Features

| | |
|-------------------------------|----|
| Circular Connector Shell Size | 19 |
|-------------------------------|----|

Dimensions

| | |
|--------------------------------------|------------|
| Compatible Insulation Diameter Range | 5.5 – 9 mm |
|--------------------------------------|------------|

Usage Conditions

| | |
|-----------------------------|---------------------------|
| IP Dust Sealing Level | 6 |
| IP Water Sealing Level | IP67 |
| Operating Temperature Range | -40 – 85 °C[-40 – 185 °F] |

Operation/Application

| | |
|--|--|
| | |
|--|--|



| | |
|---------------------|------------|
| Durability Rating | 250 Cycles |
| Circuit Application | Signal |
| Shielded | Yes |

Industry Standards

| | |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

| | |
|--------------------|---|
| Packaging Quantity | 1 |
|--------------------|---|

Other

| | |
|-------------------|-----|
| Field Serviceable | Yes |
|-------------------|-----|

Product Compliance

For compliance documentation, visit the product page on TE.com>









| | |
|---|--|
| EU RoHS Directive 2011/65/EU | Compliant with Exemptions |
| EU ELV Directive 2000/53/EC | Not Yet Reviewed |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (3.5% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not reviewed for solder process capability |

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

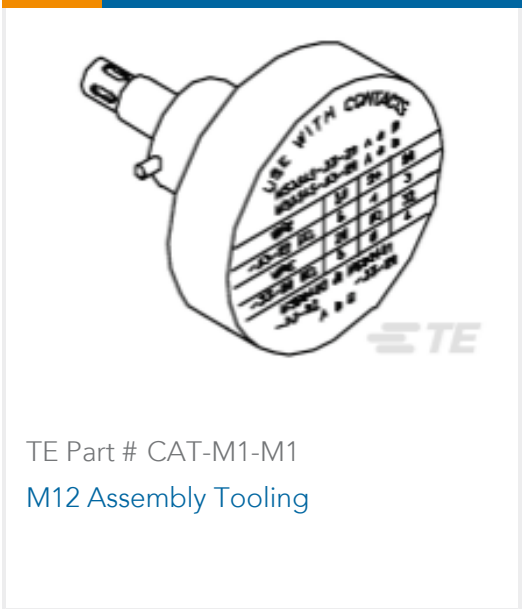

Compatible Parts

| | | | |
|---|---|--|---|
|  <p>TE Part # 1-2314103-1 M12 CRIMP CONTACT SOCKET 1MM AU 0.8AWG20</p> |  <p>TE Part # 1-2823557-1 CRIMP TOOL FOR CRIMP FLANGE /SLEEVE</p> |  <p>TE Part # 1-2823560-1 ASSEMBLY TOOL HANDLE FOR CRIMP FLANGE</p> |  <p>TE Part # 1-2823561-1 UNIVERSAL INSERT (ALL M12 CODES)</p> |
|  <p>TE Part # CAT-M1-M1 M12 Assembly Tooling</p> |  <p>TE Part # CAT-R131-IN722 Crimp Insert for Use with 1-2823557-1</p> |  <p>TE Part # 601966-1 CRIMPING TOOL M22520/2-01</p> |  <p>TE Part # 601967-1 CRIMPING TOOL M22520/1-01</p> |

Also in the Series | M12 Rail PG Clamp




Standard Circular Connectors(22)


Customers Also Bought

| | | | |
|---|---|--|---|
|  <p>TE Part #T4130012051-000 M12,REAR MOUNT,MALE,A,5P, SOLDER WIRE</p> |  <p>TE Part #206705-1 CPC RECP. ASY SIZE 13-9</p> |  <p>TE Part #1-2308323-1 M12 Straight D4 PG Clamp</p> |  <p>TE Part #1-2314097-1 M12 CRIMP CONTACT PIN 0.8MM AWG22/AWG24</p> |
|---|---|--|---|







TE Part #1-2314103-1
M12 CRIMP CONTACT SOCKET 1MM
AU 0.8AWG20



TE Part #102387-3
16 MODIV HSG COMP DR .100 POL



TE Part #280361
AMPMODU II REC. HSG, SINGLE
ROW 8 POS



TE Part #280515
AMPMODU II REC. HSG, DUAL ROW,
24 POS.

Documents

Product Drawings

M12 A-CODED F-5 CAB GLAND CONECTR FEMALE

English

CAD Files

Customer View Model

ENG_CVM_CVM_1-2312501-2_B.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_1-2312501-2_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-2312501-2_B.3d_igs.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

M12 Rail Straight Connector

English