


# IKO Linear Ball Spline G: Standard type

## LSAG, LSAGT

## LSAGL, LSAGLT

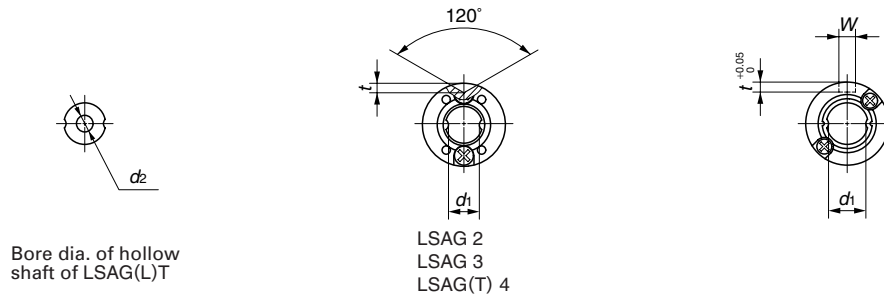

Model number	Interchangeable	Mass (Ref.) g		Dimensions and tolerances of external cylinder mm									
		External cylinder	Spline shaft (per 100 mm)	D	Tolerance	L <sub>1</sub>	L <sub>2</sub>	W	Tolerance	t	ℓ		
LSAG 2 <sup>(1)</sup>		1.0	2.3	6	$\begin{matrix} 0 \\ -0.008 \end{matrix}$	8.5	4.7	—	—	0.7	—	2	$\begin{matrix} 0 \\ -0.010 \end{matrix}$
LSAG 3 <sup>(1)</sup>		2.1	5.4	7	$\begin{matrix} 0 \\ -0.009 \end{matrix}$	10	5.9	—	—	0.8	—	3	$\begin{matrix} 0 \\ -0.010 \end{matrix}$
LSAG 4 <sup>(1)</sup>		2.5	9.6	8	$\begin{matrix} 0 \\ -0.009 \end{matrix}$	12	7.9	—	—	1	—	4	$\begin{matrix} 0 \\ -0.012 \end{matrix}$
LSAGT 4 <sup>(1)</sup>			8.2										
LSAG 5	☆	4.8	14.9	10	$\begin{matrix} 0 \\ -0.009 \end{matrix}$	18	9.4	2	$\begin{matrix} +0.014 \\ 0 \end{matrix}$	1.2	6	5	$\begin{matrix} 0 \\ -0.012 \end{matrix}$
LSAGT 5	☆		12.4										
LSAGL 5	☆	7.9	14.9										
LSAGLT 5	☆		12.4										
LSAG 6	☆	8.9	19	12	$\begin{matrix} 0 \\ -0.011 \end{matrix}$	21	12.4	2	$\begin{matrix} +0.014 \\ 0 \end{matrix}$	1.2	8	6	$\begin{matrix} 0 \\ -0.012 \end{matrix}$
LSAGT 6	☆		16.5										
LSAGL 6	☆	14.5	19										
LSAGLT 6	☆		16.5										
LSAG 8	☆	15.9	39	15	$\begin{matrix} 0 \\ -0.011 \end{matrix}$	25	14.6	2.5	$\begin{matrix} +0.014 \\ 0 \end{matrix}$	1.5	8.5	8	$\begin{matrix} 0 \\ -0.015 \end{matrix}$
LSAGT 8	☆		33										
LSAGL 8	☆	26.5	39										
LSAGLT 8	☆		33										


Note (1): No seals are attached.


(2): Dimension  $d_1$  indicates the maximum diameter when machining is done at the shaft ends.

(3): This length is the standard length. Spline shafts in other length are also available. Simply indicate the necessary length of spline shaft in mm in the identification number.

(4): The directions of basic dynamic load rating ( $C$ ), basic static load rating ( $C_0$ ), dynamic torque rating ( $T$ ), and static torque/moment rating ( $T_0$ ,  $T_x$ ,  $T_y$ ) are shown in the sketches below. The upper values in the  $T_x$  and  $T_y$  columns apply to one external cylinder, and the lower values apply to two external cylinders in close contact.

Remark: The mark ☆ indicates that interchangeable specification products are available.

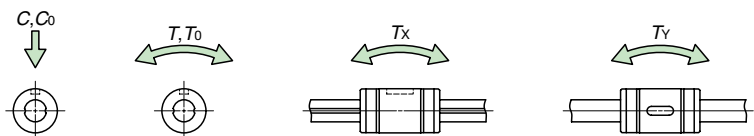

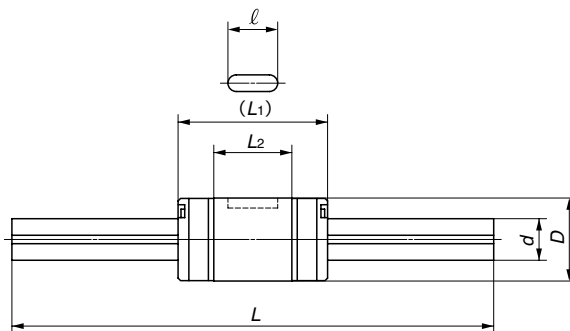

Dimensions and tolerances of spline shaft mm				Basic dynamic load rating <sup>(4)</sup> C N	Basic static load rating <sup>(4)</sup> C <sub>0</sub> N	Dynamic torque rating <sup>(4)</sup> T N-m	Static torque rating <sup>(4)</sup> T <sub>0</sub> N-m	Static moment rating <sup>(4)</sup>		Model number
d <sub>1</sub> <sup>(2)</sup>	d <sub>2</sub>	L <sup>(3)</sup>	Maximum length					T <sub>x</sub> N-m	T <sub>y</sub> N-m	
1.2	—	50 100	100	222	237	0.28	0.30	0.22 1.6	0.39 2.9	<b>LSAG 2<sup>(1)</sup></b>
2.2	—	100 150	150	251	285	0.45	0.51	0.31 1.9	0.53 3.3	<b>LSAG 3<sup>(1)</sup></b>
3.2	—	100 150	200	303	380	0.70	0.87	0.52 2.9	0.90 5.0	<b>LSAG 4<sup>(1)</sup></b>
	1.5		150							<b>LSAGT 4<sup>(1)</sup></b>
4.2	—	100 150	200	587	641	1.8	1.9	1.0 7.9	1.8 13.6	<b>LSAG 5</b>
	2									<b>LSAGT 5</b>
	—			879	1 180	2.6	3.5	3.2 19.3	5.5 33.4	<b>LSAGL 5</b>
	2									<b>LSAGLT 5</b>
5.2	—	150 200	300	711	855	2.5	3.0	1.7 11.7	3.0 20.3	<b>LSAG 6</b>
	2									<b>LSAGT 6</b>
	—			1 030	1 500	3.6	5.2	5.0 27.6	8.6 47.8	<b>LSAGL 6</b>
	2									<b>LSAGLT 6</b>
7	—	150 200 250	500	1 190	1 330	5.5	6.2	3.3 22.0	5.6 38.1	<b>LSAG 8</b>
	3		400							<b>LSAGT 8</b>
	—		1 800	2 470	8.4	11.5	10.3 56.3	17.8 97.5	<b>LSAGL 8</b>	
	3								400	<b>LSAGLT 8</b>

### Example of identification number of assembled set

