ANT-868-WRT-UFL-150 - ACTIVE

TE Internal #: L9000154-01 Dome/Puck Antenna, Single Band, LPWAN / LoRaWAN, External Mount, Stud/Screw/Lug Mount, MHF / MHF1 / U.FL, Omnidirectional, Single Port, Gain 3 < 6 dBi

View on TE.com >

Antennas

Wireless Application: LoRaWAN, LPWAN, Wi-Fi

Mounting Location: External

Mounting Type: Stud/Screw/Lug Mount

Frequency Category: 862 – 870

Antenna Type: Dome/Puck

Features

Product Type Features

Antenna Termination

Antenna Product Type

MHF, MHF1, U.FL, UMCC

Antenna





Mounting Location	External
Antenna Type	Dome/Puck
Band Type	Single Band
Port Configuration	Single Port
Signal Characteristics	
Frequency Category	862 – 870
Peak Gain	3 < 6 dBi
Mechanical Attachment	
Mounting Type	Stud/Screw/Lug Mount
Operation/Application	
Directionality	Omnidirectional
Industry Standards	
Wireless Application	LoRaWAN, LPWAN, Wi-Fi
Primary Application	LoRaWAN, LPWAN

ANT-868-WRT-UFL-150

Dome/Puck Antenna, Single Band, LPWAN / LoRaWAN, External Mount, Stud/Screw /Lug Mount, MHF / MHF1 / U.FL, Omnidirectional, Single Port, Gain 3 < 6 dBi



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts




Customers Also Bought

ANT-868-WRT-UFL-150

Dome/Puck Antenna, Single Band, LPWAN / LoRaWAN, External Mount, Stud/Screw /Lug Mount, MHF / MHF1 / U.FL, Omnidirectional, Single Port, Gain 3 < 6 dBi



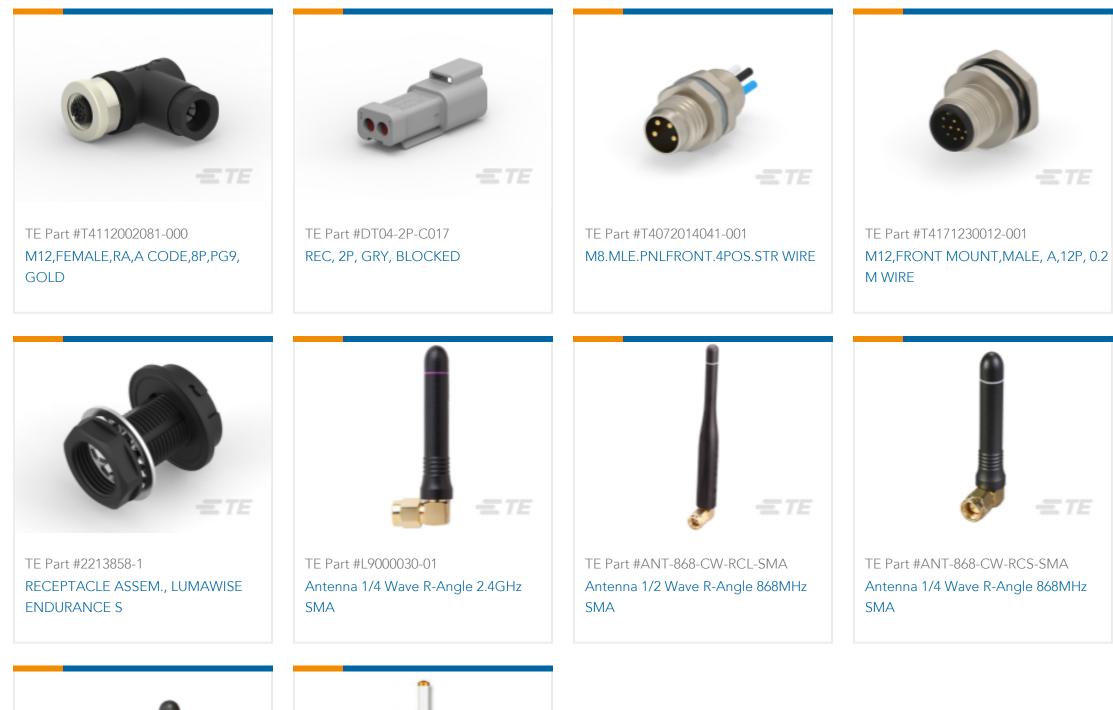



Documents

Product Drawings

Antenna Dome 868MHz 1.32 150 UFL

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_L9000154-01_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_L9000154-01_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_L9000154-01_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

C For support call+1 800 522 6752

ANT-868-WRT-UFL-150

Dome/Puck Antenna, Single Band, LPWAN / LoRaWAN, External Mount, Stud/Screw /Lug Mount, MHF / MHF1 / U.FL, Omnidirectional, Single Port, Gain 3 < 6 dBi

ANT-868-WRT-ccc 868 MHz External Panel-Mount Antenna

English