

Product Information



2340PIP125P30-13

EAN 4031582348545


Swivel castor, housing made of pressed steel, bright zinc plated, blue passivated, precision ball bearing in swivel head, with PU cover, wheel axle with nut, bolt hole.

Wheel centre made of Polypropylene, Tread: solid rubber, grey non-marking, precision ball bearing

Technical Data

Wheel diameter	125 mm
Width of Tread	32 mm
Centre hole	13 mm
Offset	38 mm
Swivel Interference	201 mm
Overall height	157 mm
Temperature	- 20 / + 60 °C
Standard	EN 12530
Weight	0.707 kg
Swivel Radius	100.5 mm
Hardness of tread	A 75 Shore
Load capacity	80 kg
Load capacity (static)	160 kg

Roll performance	+	+	+	+	+
Movement noise	+	+	+	+	+
Attrition	+	+	+	+	+
Corrosion resistance	+	+	+	+	+

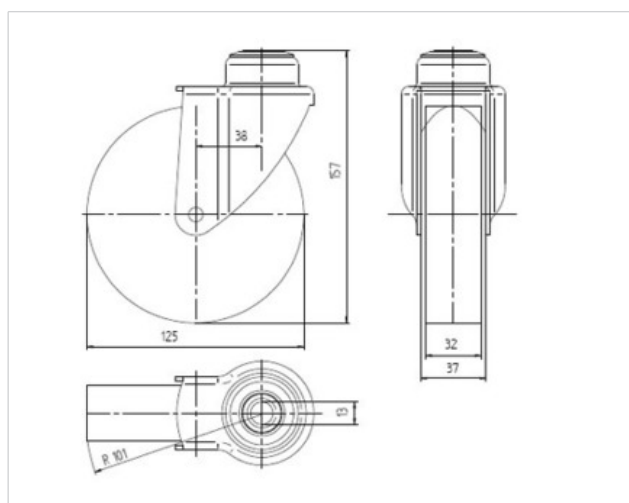

2340PIP125P30-13

EAN 4031582348545

