
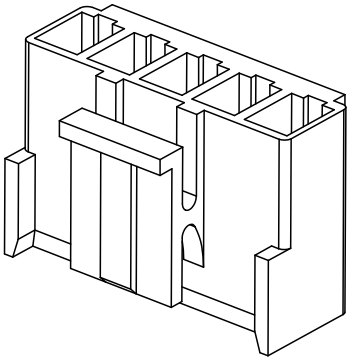




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		pin数表B尺寸修正，图面升级整理图面	2024.08.15	阿 树

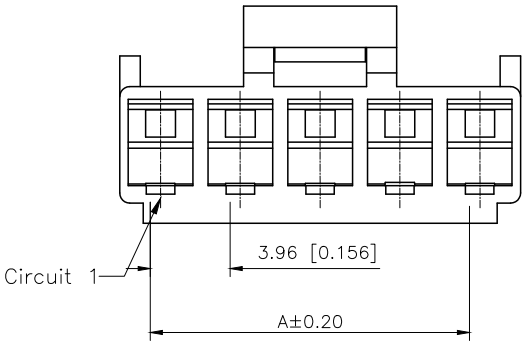


- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:7A AC/DC
 - Withstanding Voltage:1500V AC/minute
 - Temperature range:-45°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing:≤20mΩ

PART NO.:
X9636 H-XX-N0
① ② ③ ④

- ① Series No
② Category:H-HSG
③ Row No-Pin No: XX-Q2P~15P
④ Material:N0-PA66 94V-0

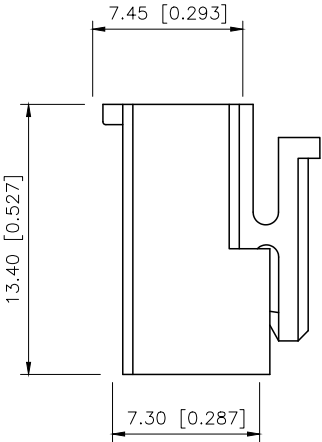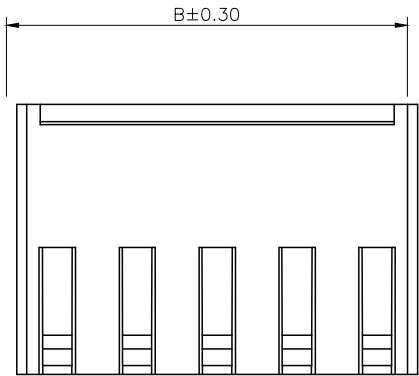

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	3.96	8.30	09	31.68	36.30
03	7.92	12.30	10	35.64	40.30
04	11.88	16.30	11	39.60	44.30
05	15.84	20.30	12	43.56	48.30
06	19.80	24.30	13	47.52	52.30
07	23.76	28.30	14	51.48	56.30
08	27.72	32.30	15	55.44	60.30

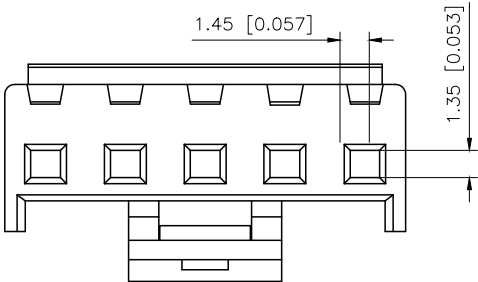

X.	±0.40
X.x	±0.30
*X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



XKB INDUSTRIAL PRECISION CO.,LIMITED

X9396H-XX-N0		Nylon 66 UL 94V-0	X9396T		X9396W	
PART NO		Material	Suitable XKB Terminal		Suitable XKB Terminal	
DESIGN	阿 树		VIEW:			
			MODEL TYPE: 3.96mm Crimp Style Connectors			
CHECKED			UNIT: mm/in	PART NO.: X9396H-XX-N0		
APPROVED			SIZE: A4	DWG NO.:		
PRECISION CO.,LIMITED				SCALE	PAGE	REVISION
				N/A	1/1	A1