

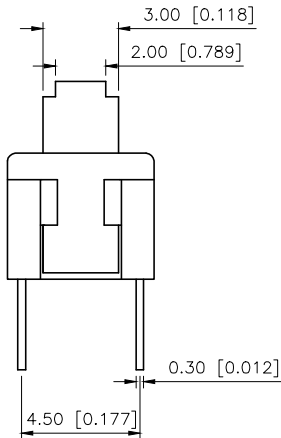



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.23	阿树

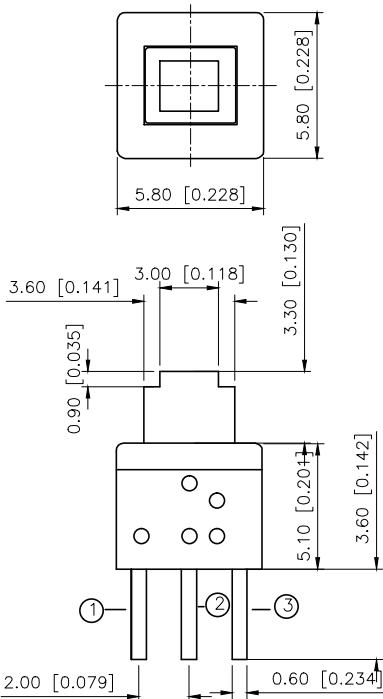

FEATURES
Light operating force
Long term low contact resistance
Momentary or latching operation
Compact spacing on PCB of 5.8mm
Short stroke 1.5mm to latch

■ SPEAFICATIONS


1.ELECTRICAL

Con tact rating	0.1A,30VDC
Con tact resistance	50mΩ Max
Insulation resistance	100MΩ Min .at 250VDC
Dielectric strength	250VAC Min .for 60sec


2.MECHANICAL AND ENVIRONMENTAL

Temperature rating	Operating -15 to +55 storage -25 to +65
Operation	160±80gf
Stroke	Lock Stroke .15±0.2mm Full stroke,2.0±0.2mm
Operating life	Full load:1x10 ⁴ cycles NO load:1x10 ⁵ cycles
Con tact form	DPDT

PAPT NO	XKB5858-X-80
OPERATION	W:NO LOCK Z:LOCK



CIRCUIT DIAGRAM

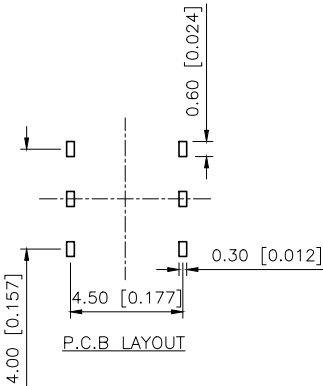

7	Contact	2	Phosphor Bronze	Plating silvering
6	Terminal	6	Brass	Plating silvering
5	Spring	1	Sus	Natural
4	Base	1	Nylon	
3	Crochet Needle	1	Sus	Natural
2	Cover	1	Nylon	
1	Keystake	1	Nylon	
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	KEY SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	XKB5858-X-80
APPROVED		SIZE:	A4	DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1