



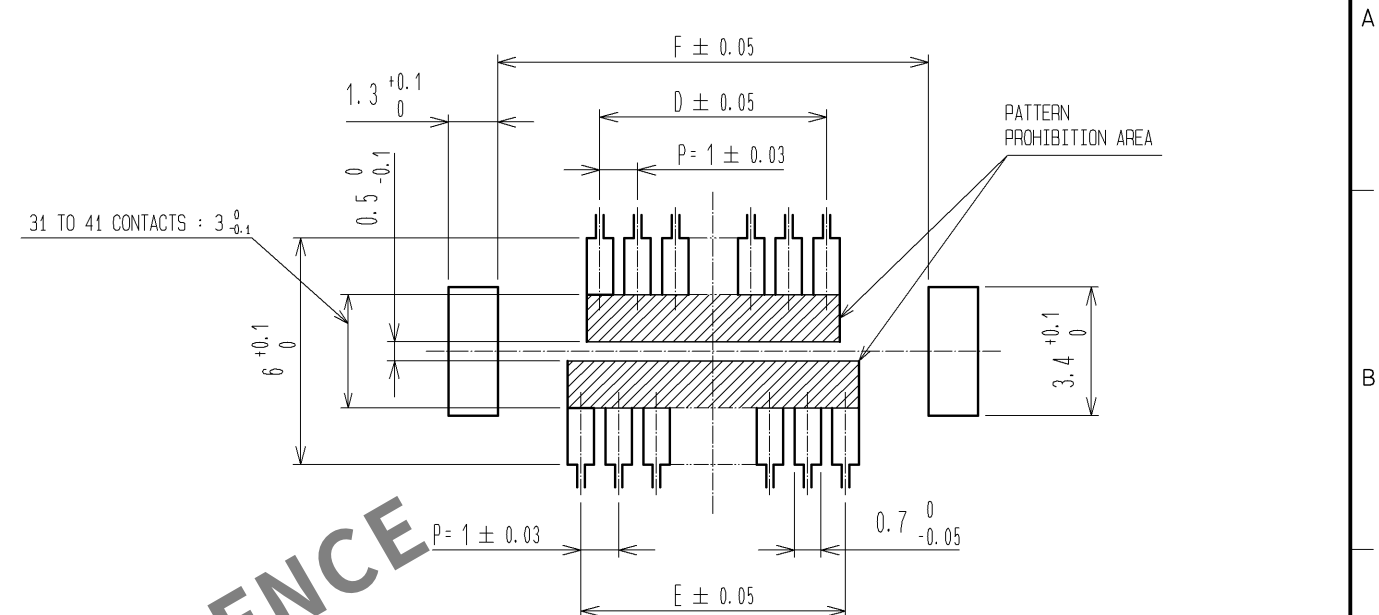


PART No.	CODE No.	NUMBER OF CONTACTS	A	B	C	D	E	F
DF9BA-31P-1V(32)	CL540-0209-4-32	31	21.1	19.3	17.6	14	15	19.4
DF9BA-41P-1V(32)	CL540-0220-7-32	41	26.1	24.3	22.6	19	20	24.4

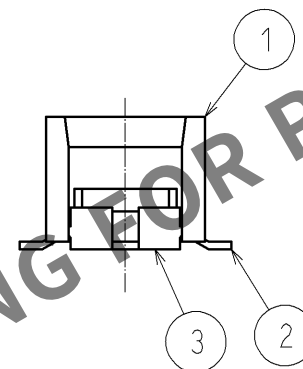

NOTES 1 : LEAD CO-PLANARITY INCLUDE REINFORCED METAL FITTINGS SHALL BE 0.1mm MAX.
 2 CAV NO. IS INDICATED IN APPROX POSITION SHOWN.
 3 31 TO 41 CONTACT CONNECTORS HAVE TWO LOCKS AS PER DRAWING.

3	BRASS	SURFACE:TIN PLATED(REFLOW FINISH)1μm min UNDER PLATING:COPPER 0.3μm min	8	PS	CLEAR(REINFORCEMENT COLLAR)
2	PHOSPHOR BRONZE	TIN PLATED(HOT DIP) 1μm min	7	PS	BLACK(PLASTIC REEL)
1	POLYAMIDE	BEIGE, UL94V-0	6	POLYIMIDE	BROWN(HEAT-RESISTANCE TAPE)
			5	POLYESTER	CLEAR(COVER TAPE)
			4	PS	CLEAR(EMBOSSSED CARRIER TAPE)
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : MO. ISHIDA	14.09.08	DRAWING NO. EDC3-311259-02				
		CHECKED : TS. MIYAZAKI	14.09.08	PART NO. DF9BA-*P-1V(32)				
		DESIGNED : YN. SAKAMOTO	14.09.08	CODE NO. CL540-				
		DRAWN : YN. SAKAMOTO	14.09.08	 1/2				

