
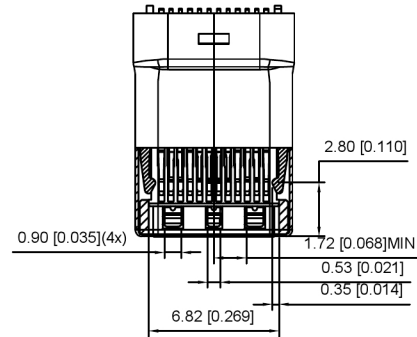


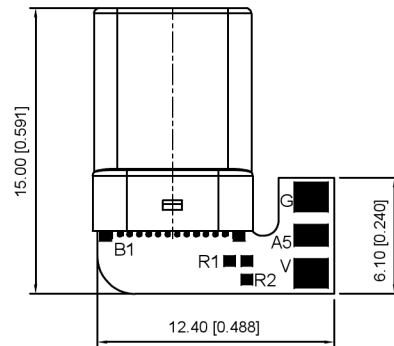

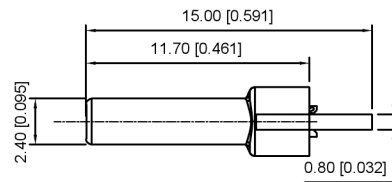




P/N	R/C
U261-24XXN-4B0342	R1(5.1K Ω ±5%)
U261-24XXN-4B0343	R2(56K Ω ±5%)

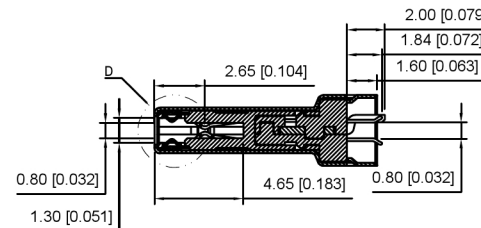


SECT B-B

D
2:1

SECT A-A

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SBU1	D-	D+	CC	Vbus	TX1-	TX1+	GND
GND	TX2+	TX2-	Vbus	Vconn			SBU2	Vbus	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

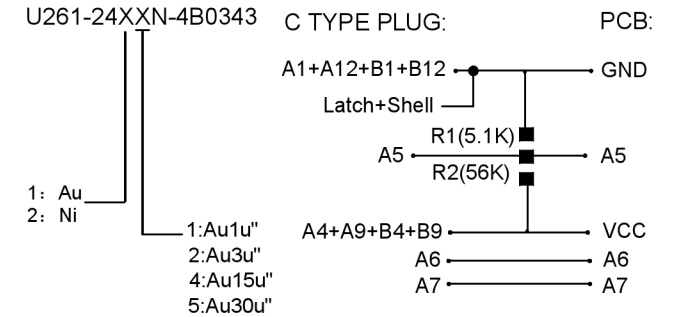

REMARKS:

1.CONTACT INSERTION AND WITHDRAW FORCE :

1.Insertion force: 5N-20N max.

2. Withdrawal force: 8N-20N.

3.Durability : 10000Cycles.

2.ELECTRIC PROPERTY:

1.Contact current rating: 3A.

2.Dielectric Strength: 100V AC(RMS).

3.Insulation Resistance: 100 megaohms min.

4.Contact resistance:

40mOhms MAX.FOR VBUS,GND AND OTHER CONTACT

50mOhms MAX.AFTER ENVIRONMENT TEST

3.AMBIENT TEMPERATURE:

1.Operating temperature: -55°C to +85°C.

6	Shrapnel	SUS T=0.10mm	
5	Shell	SUS T=0.15mm	Ovep-plating: Ni
4	Terminal	C7025 T=0.15mm	Ovep-plating: Au Ni/Sn
3	Latch	SUS T=0.4mm	
2	Housing	LCP	UL94-0
1	Housing Stopper	LCP	UL94-0
ITEM	DESCRIPTION	MATERIAL	REMARKS

DSND		SCALE: N/A	MODEL TYPE: Type-C 3.1
DWN		VIEW:	PART NO.:
CHKD		UNIT: mm/in	DWG NO.: U261-24XXN-4B0343
APPD		SIZE: A4	WEIGHT
			SHEET 1/1
			REVISIOI A0

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

REVISIONS

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

UNSPECIFIED TOLERANCES

广东星坤科技股份有限公司

DATE

MARK

文件工程章