

Actuator

46-
2231.11H0.000

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/46-2231.11H0.000>

Your product:



46-2231.11H0.000 Actuator

FRONT

| | |
|------------------------------|---------|
| Front bezel material: | Plastic |
| Front form: | round |
| Front bezel colour: | Black |
| Front dimension: | Ø 29 mm |

MOUNTING

| | |
|--------------------------|-----------|
| Mounting cut-out: | Ø 22.3 mm |
| Design: | raised |

OPERATING-/INDICATION PART

| | |
|---------------------------|--------------|
| Lens material: | Plastic |
| Lens colour: | Green |
| Lens shape: | flush |
| Lens illumination: | illuminative |
| Lens optics: | transparent |

ELECTRICAL CHARACTERISTICS

| | |
|--------------------------|----|
| Protection class: | II |
|--------------------------|----|

MECHANICAL CHARACTERISTIC

| | |
|---------------------------|----------------------------------|
| Switching action: | Momentary |
| Tightening torque: | 2 ... 3 Nm (17.7 ... 26.6 Lb-in) |

Weight: 0.019 kg
Mechanical lifetime: 1 Mio. cycles of operation

AMBIENT CONDITION

Vibration resistance: 5g f= 2...500Hz (EN-IEC 60068-2-6)
Operating temperature: - 25 °C ... + 55 °C
Shock resistance: 30g, 18ms (EN-IEC 60068-2-27)
50g, 11ms (EN-IEC 60068-2-27)
IK front protection: IK03
Climate resistance: +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)
IP front protection: IP65


CERTIFICATE

Conformities: CE
Approbations: CSA, EAC, UL
Standards: CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, UL508

OTHER

Housing material: Plastic
max. number of switching elements: 8
Short Description: Actuator, Ø 22.3 mm, Ø 29 mm, flush, illuminative, Green, Plastic, transparent, round, Black, Plastic, Momentary, IP65, IK03
Housing colour: Black

Dimension drawings:

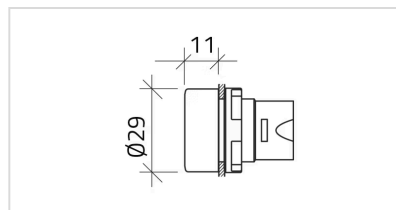

Mounting cut-outs:

