

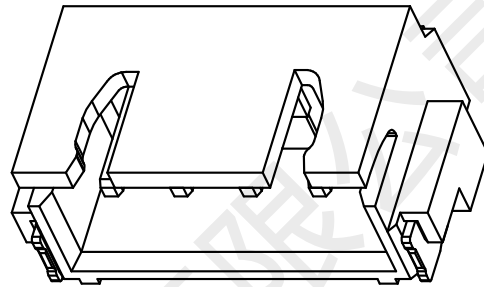
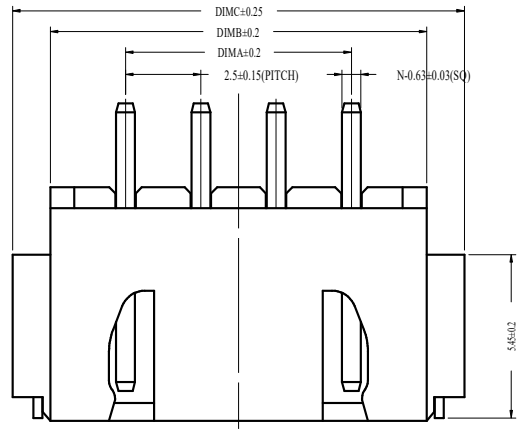



REV.	EC#	DESCRIPTION	DATE	DRAWN	CHECK	APPROVED
1.00		初版发行	2020-07-22			

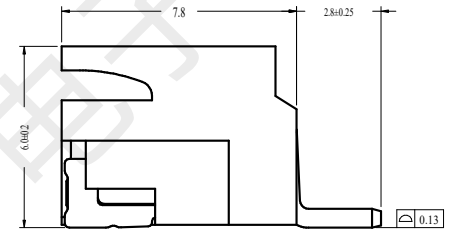

Pin	DIM.A	DIM.B	DIM.C
15	35.00	40.00	42.50
14	32.50	37.50	40.00
13	30.00	35.00	37.50
12	27.50	32.50	35.00
11	25.00	30.00	32.50
10	22.50	27.50	30.00
9	20.00	25.00	27.50
8	17.50	22.50	25.00
7	15.00	20.00	22.50
6	12.50	17.50	20.00
5	10.00	15.00	17.50
4	7.50	12.50	15.00
3	5.00	10.00	12.50
2	2.50	7.50	10.00

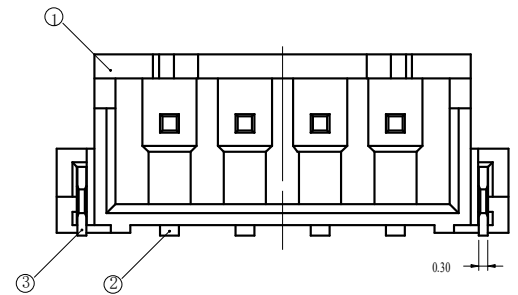

1. 工作温度: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
2. 适用线规: AWG#30~#22.
3. 额定电压: 250V DC/AC(rms).
4. 额定电流: 3.0A.
5. 接触电阻: $\leq 20\text{m}\Omega$.
6. 耐压值: 1000V AC/minute.
7. 绝缘电阻: $\geq 1000\text{M}\Omega$.

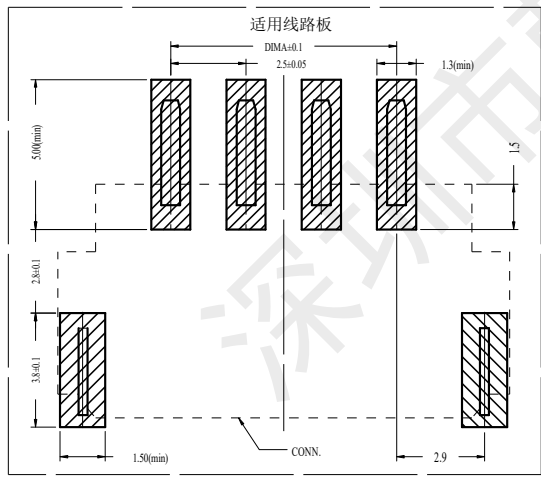

DIM	TOL	DIM	DEG
X.		X°	$\pm 3.00^{\circ}$
X.X	± 0.35	X.X°	$\pm 2.00^{\circ}$
X.XX	± 0.25	X.XX°	$\pm 1.00^{\circ}$
X.XXX	± 0.15	X.XXX°	

3	FITTING NAIL	2 PCS	材质:磷青铜,电镀:镀亮锡60u"MIN
2	PIN	n PCS	材质:黄铜,电镀:镀亮锡60u"MIN
1	Housing	1 PCS	材质:LCP (UL94V-0),颜色:本色或黑色
NO.	NAME	Q'TY	DESCRIPTION

韩下 HANXIA 深圳市韩下电子有限公司

DRAW :	黄彬	2020-07-22	TITLE:	针座	DRAW NAME:	HX 2.54mm-7P WT
DESIGN:			SERIES:	2021 SERIES	DRAW NO.	
CHECK:	张伟	2020-07-22	P/N:		UNIT:	SHEET:
APPROVED	罗小春	2020-07-22	REV. 1.00	SCALE N/A	mm	1/1
CUSTOMER DRAWING						