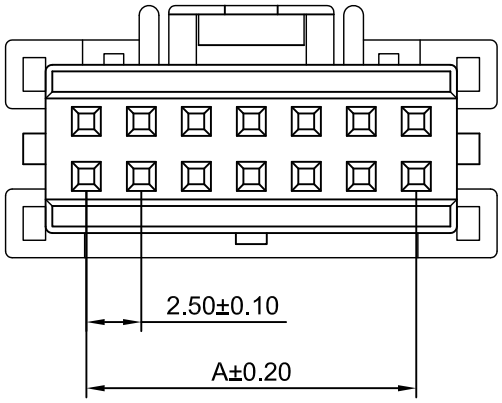

2x4P~2x8P

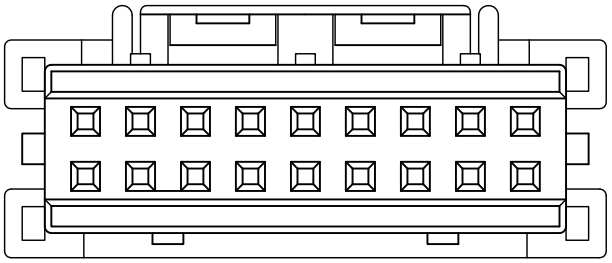

2x9P~2x20P

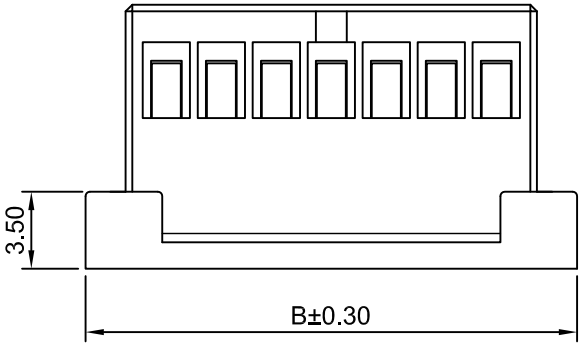

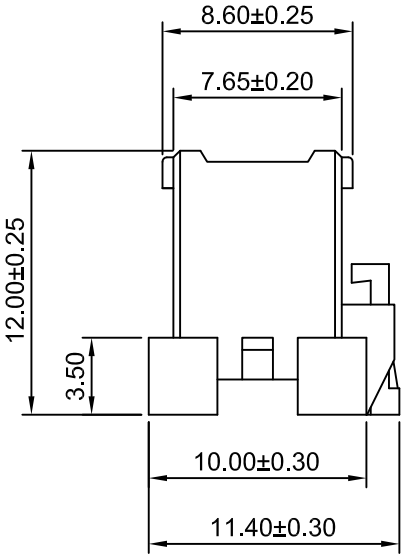

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2508H-2x4P	7.50	15.00
A2508H-2x5P	10.00	17.50
A2508H-2x6P	12.50	20.00
A2508H-2x7P	15.00	22.50
A2508H-2x8P	17.50	25.00
A2508H-2x9P	20.00	27.50
A2508H-2x10P	22.50	30.00
A2508H-2x11P	25.00	32.50
A2508H-2x12P	27.50	35.00
A2508H-2x13P	30.00	37.50
A2508H-2x14P	32.50	40.00
A2508H-2x15P	35.00	42.50
A2508H-2x16P	37.50	45.00
A2508H-2x17P	40.00	47.50
A2508H-2x18P	42.50	50.00
A2508H-2x19P	45.00	52.50
A2508H-2x20P	47.50	55.00

REV	DESCRIPTION	DATE
A2	CHANGE THE DRAWING	2023.04.15
A1	MODIFY DRAWING	2022.12.26
A0	NEW RELEASE	2021.11.17

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1
DRWN	CHK'D	APPR
Chengbiao Ye	Diankui Wan	Jack Yin

General Tolerances
x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

THIRD ANGLE PROJECTION

TITLE
2.50mm PITCH HOUSING

DRAWING NO.
A2508H-2xXP

REV
A2