




Chip LAN Choke


- 1.High common mode impedance at high frequency Effects excellent noise suppression performance
- 2.100% Lead(Pb) & Halogen-Free and RoHS compliant.
- 3.Operating temperature-40~+85 C (Including self - temperature rise)

Part Number	Common mode Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA)max.	Rated Volt. (Vdc)max.	Withstand Volt. (Vdc) max.	IR (Ω) min.
LC2012A801T J	800±25%	100	0.88	300	50	125	10M


MECHANICAL

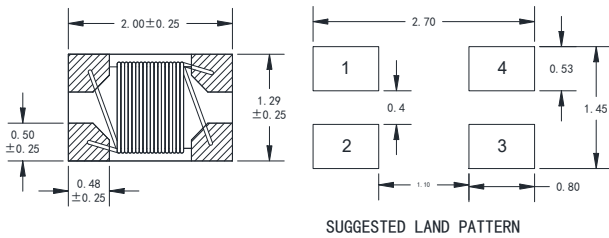


SCHEMATICS

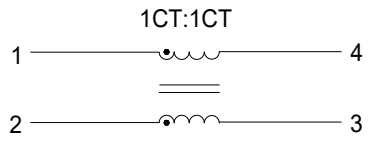


IMPEDEANCE FREQUENCY

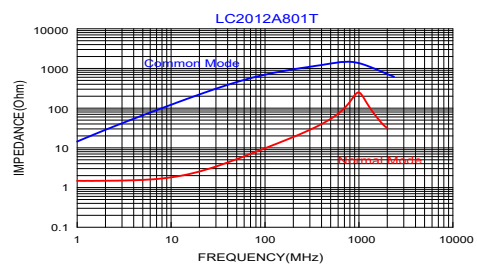

TAPING AND PACKING

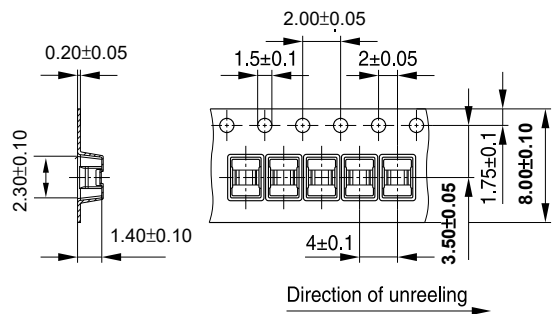

Reel

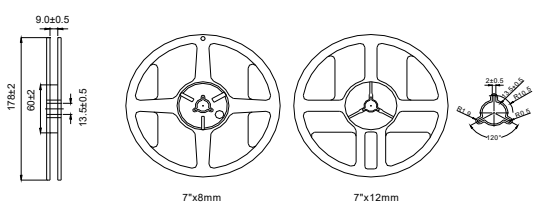

Quantity (pcs):
 2000 PCS PER REEL
 5 REELS PER CARTON
 10000PCS PER CARTON

Dimensions in mm