
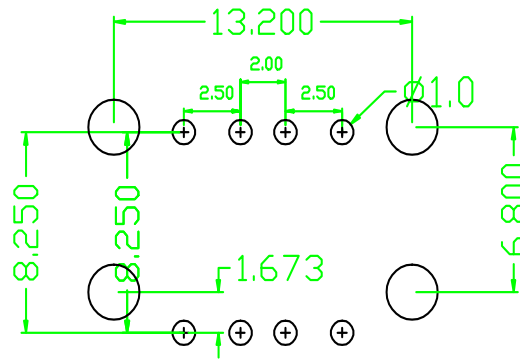
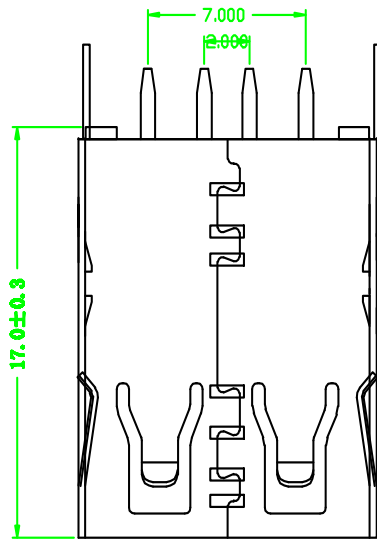
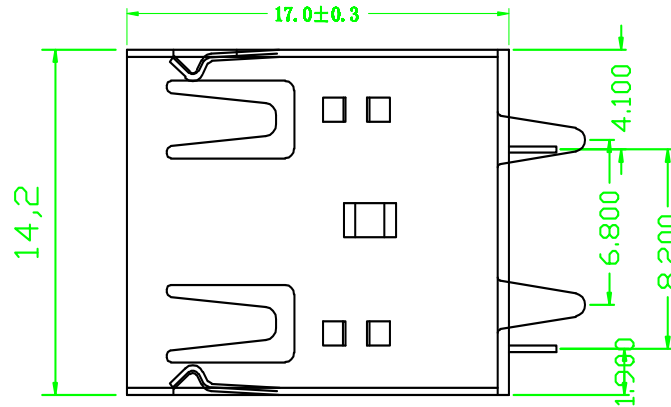


Kinghelm®

直脚直边



- Material:**
 Contact: Phosphor Bronze
 Insulator: PBT+30%
 G. F. UL 94V-0
 Shell: SPCC
- Mechanical:**
 Mating: 35N max.
 Withdrawal Force: 10N min.
 Durability: 1500 cycles min.
- Electrical:**
 Current-max (amps) 1.5A
 Voltage-max (volts) 30V
 Withstanding Voltage 750V AC
 Contact Resistance (ohms) 30 milliohms max insulation
 Resistance (ohms) 1000 Megohms min.
- Plating:**
 Contacts: Gold and Tin over Nickel Plated
 Shell: Nickel over all plating.
- Environmental:**
 Temperature Range: -55 to 85

产品图 MANUFACTURE DWG	公差一览表 TOLERANCE UNLESS OTHERWISE			深圳市金航标电子有限公司 WWW.BDS666.COM	
	单位 UNIT	MM	INCH	KH-2AF180ZJ-17 0755-83044319	
	.X	±0.20	.X	产品名称 USB A/F 双层直插 17.0直边直脚	
	.XX	±0.10	.XX	角法 VIEW	制图 DRAWING
	.XXX	±0.05	.XXX	比例 SCALE	设计 DESIGN
2013. 08. 29				版本 SCALE	图号
				审核 CHKD	核准 APPD
				版本 A1	图号
				审核 CKCL	张数 1/1