




TOP VIEW

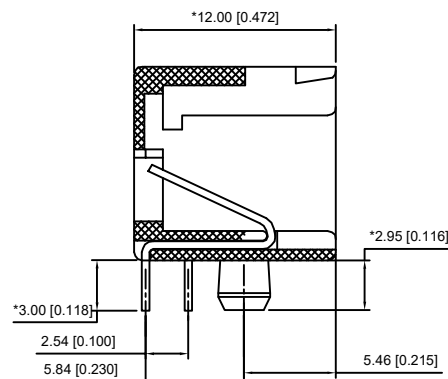

CUTAWAY VIEW

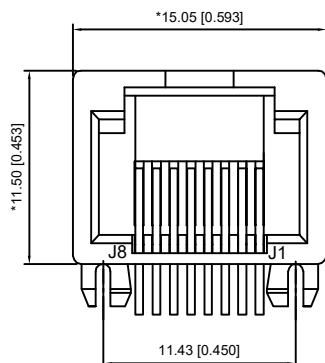


FRONT VIEW

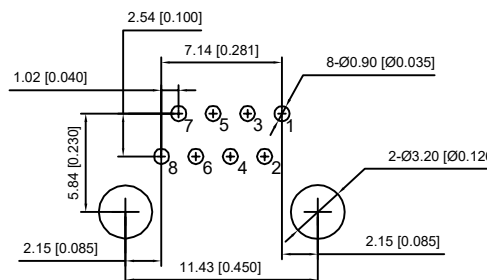RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

XKB Connectivity

XKB Connectivity

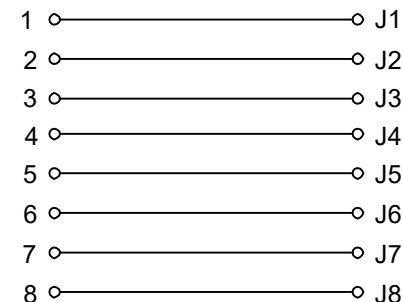

XKB Connectivity

MATERIAL 材料:

HOUSING 外壳: PBT,UL94V-0,BLACK.

TERMINAL 端子: PHOSPHOR BRONZE ,Ø=0.46MM,
GOLD PLATING ON CONTACT AREA.**MECHANICAL 机械:**

DURABILITY 耐用性: 750 CYCLES MIN.12.5MM/MINUTE

INSERTION FORCE 插入力: 2.2KG.F MAX

RETENTION STRENGTH 固位力:7.7KG.F BETWEEN JACK AND PLUG

OPERATING TEMPERATURE 工作温度: -40°C~+85°C.

STORAGE TEMPERATURE 储存温度: -40°C~+85°C.

ALL CRITICAL DIMENSIONS WITH ***

ELECTRICAL 电动:

VOLTAGE 电压:125 VOLTS AC

CURRENT RATING 额定电流:1.5AMP

DIELECTRIC STRENGTH 介电强度:1000 VAC RMS 50HZ OR 60HZ,1MIN

INSULATION RESISTANCE 绝缘电阻:500 MEGA OHMS MIN.INITIAL
AFTER 500V DC FOR 1 MINUTECONTACT RESISTANCE 接触电阻:SINGLE TERMINAL 30 MILLIOHMS MAX
INITIAL 50 MILLIOHMS MAX.AFTER
DURABILITY TEST

X10ADIWK1DY1006

1:AU=1U"
3:AU=3U"
4:AU=6U"
5:AU=15U"
6:AU=30U"

							DSND		SCALE: N/A	MODEL TYPE: RJ JACK			
ΔX					ANGLAR	±5°		DWN	VIEW: 	PART NO.:			
ΔX					L≤ 4	±0.2		CHKD	UNIT: mm/in	DWG NO.:			
ΔX					4<L≤ 16	±0.3		APPD	SIZE: A4	X10ADIWK1DY1006			
ΔX					16<L≤ 63	±0.4							
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5							
REVISIONS							UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn													

XKB