


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.09.02	阿树

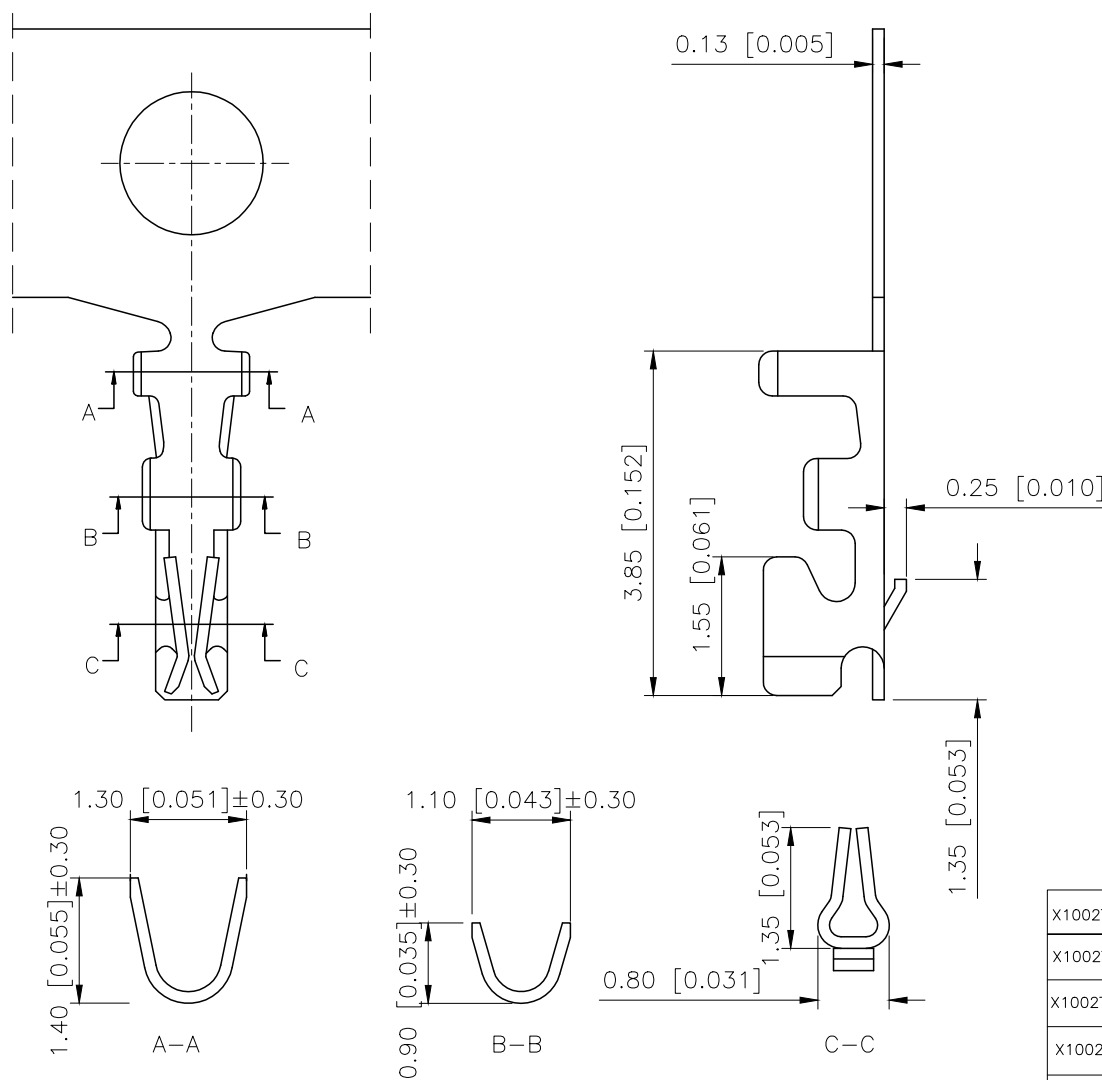

- SPECIFICATIONS
- Voltage rating:50V AC/DC
 - Current rating:1A AC/DC
 - Withstanding Voltage:500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥100MΩ
 - Contact resistance:≤20mΩ

PART NO.:

X1002 I-P SN-E
① ② ③ ④ ⑤

- ①Series No
②Category:T-Terminal
③Material:P-Phosphor bronze
④Plating Style:
V01-All Gold Flash
SN-Bright tin plating 70u";30u" Ni
SN2-50u" Ni Min,120u" Tin Min
⑤Plug the Pin & Special No:E-Have ears

X1002T-PV03-E	Phospho Bronze	AWG#28-32	0.80mm	Stamping Before Plating:30-50u" Ni;Whole Gold :3u" Min	X1002H
X1002T-PV01-E				Stamping Before Plating:30-50u" Ni;Whole Gold:Gold Flash	
X1002T-PSN2-E				Stamping Before Pating:50u" Min Ni;120u"Sn Min	
X1002T-PSN-E				Stamping Before Plating:30-50u" Ni;70-120u"Sn	
PART No	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

ANGULAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 1.0mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X1002T-PSN-E
APPROVED		SIZE: A4	DWG NO.: