


REV. 0
DCO 17615

| | | |
|-----------------|---------------------------|------|
| COIL: @ 25°C | | |
| RESISTANCE | 600 OHMS | ±10% |
| NOMINAL VOLTAGE | 26.5 VDC | |
| MUST OPERATE | 13.5 VDC | |
| MUST RELEASE | 8.5 VDC MAX, 2.7 VDC MIN. | |

| | | |
|--------------|---------------------------|--|
| ENVIRONMENT: | | |
| VIBRATION | 10 Hz TO 2000 Hz @ 30 g's | |
| SHOCK | 100 g's 11 MS. DURATION | |
| TEMPERATURE | -65 °C TO +125 °C | |

NOTES: OPERATE TIME: 5 MS MAX
RELEASE TIME: 4 MS MAX
CONTACT BOUNCE 2.5 MS MAX

CUSTOMER DATA SHEET

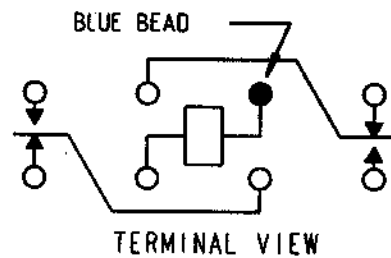

CONTACT RATING: LOW LEVEL TO 2 AMPS
28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 19 JUN 02 | *ASB 6/19/02*

CII Technologies
advanced control electronic solutions

CUST. GENICOM
CUST. NO. 3SAF5062H1 REV.

TYPE "FW" RELAY

FW 11133S01

NOT the LATEST REVISION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[FW11133S01](#)