




DETECT SWITCH




Card is not inserted;  
Sw2 and Sw1/GND pin is open  
Card is inserted;  
Sw2 and Sw1/GND pin is close

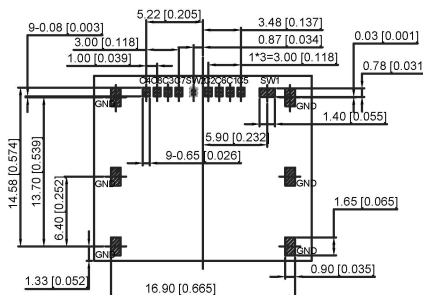

RECOMMENDED P.C.B. LAYOUT

TOP VIEW(TOLERANCE±0.05)

PAD AREA



NOTES:

- MATERIAL:
    - Housing: High Temperature Thermoplastic UL94V-0; Color Black.
    - Terminal: Copper Alloy.
    - Shell: Stainless Steel.
  - SPECIALITY:
    - Rated current: 1.0A
    - Rated voltage: 50V
    - Contact Resistance: 100mΩ MAX
    - Insulation Resistance: 1000MΩ MIN 500V DC
    - Dielectric withstanding voltage: 500V AC.
    - Solder ability: 255±5°C, 5±0.5s.
    - Durability: 5000 Cycles Min.
    - Operating condition: Temperature -40°C ~ +85°C; Humidity 80% R.H MAX
3. PLEASE CONTACT JITS SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

ITEM	PART NAME	Q'TY	MATERIAL	FINISHING
1	HOUSING	1	LCP	Black UL94V-0
2	TERMINAL	9	COPPER ALLOY	Contact area: Gold plated
3	SHELL	1	SUS	SMT area: Gold plated
4	LINK	1	SUS304	
5	SPRING	1	SWP	
6	SLIDER	1	LCP	Black UL94V-0

广东星坤科技股份有限公司

生效日期

文件工程章

REVISIONS

DSND	DATE	SCALE: N/A	MODEL TYPE: SIM CARD CONN
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm/in	DWG NO.: XKSMO-072-P9
APPD	DATE	SIZE: A4	WEIGHT 1.0g
UNSPECIFIED TOLERANCES			SHEET 1/1
XKB INDUSTRIAL PRECISION CO., LIMITED			REVISION A0