
### **Magnetics**

# **Power Inductor**

### Model HA55


- Operating Temperature Range -40°C to +155°C •
- High inductance, high efficieny and excellent • current handling
- Use as DC-DC converter and in high current • applications, suitable for industrial as well as automotive applications
- **RoHS** Compliant •
- AEC-Q200 Certified



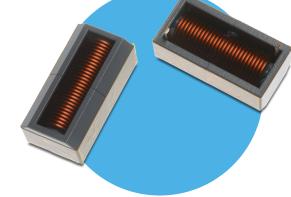

All parts are Pb-free and comply with EU Direcv e 2011/65/EU (RoHS2)

## **Electrical Schematic**

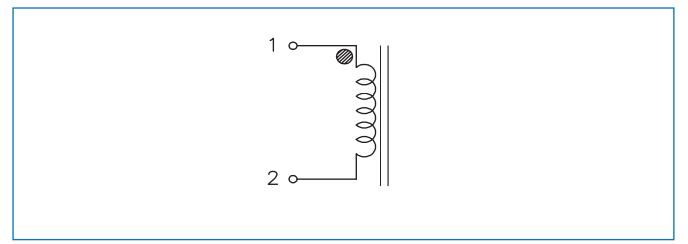

## Specifications @ 25°C

Part Number	Inductance 100kHz, 100mV (μΗ) TYP	@Rated Current Inductance 100kHz, 100mV (μΗ) TYP	I <sub>rated</sub> Rated Current (A)	I <sub>sat</sub> Satura Current (A)	DC Resistance		SRF	
					mΩ Typ	mΩ Max	MHz Type	Figure
HA55-3623200LF	20.00	14.50	33.00	35.0	3.35	3.85	14.0	1
HA55-3023115LF	11.50	8.24	39.00	43.0	2.30	2.76	33.0	2
HA55-2223070LF	7.00	5.33	40.00	48.0	1.70	2.00	33.0	3
HA55-3023130LF	13.00	9.33	37.00	40.0	2.50	3.25	19.0	4
HA55L-3623220LF*	22.00	13.00	34.00	26.0	3.35	3.85	12.0	1
HA55L-3023135LF*	13.50	8.42	39.00	30.0	2.30	2.76	33.0	2
HA55L-2223088LF*	8.83	5.52	41.00	33.0	1.70	2.00	36.0	3
HA55L-3023163LF*	16.30	9.38	37.00	27.0	2.50	3.25	25.0	4
HA55L-3623400LF*	40.00	24.00	26.00	20.0	5.70	6.20	8.25	1
HA55L-4523500LF*	50.00	26.00	32.00	20.0	7.25	8.35	6.85	5

Notes : (1) Inductance is measured at 100kHz, 0.1Vrms, 0Adc. (2) The rated current is the approximate DC current at which ∆T is approximately 60°C. This current is determined by soldering

the unit on a typical application PCB, and then applying the current to the unit for 30 minutes. (3) Isat is the saturation current at which inductance rolls off approximately 30% from its initial unbias inductance value.

\* Low cost version

#### General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc

**BI** Technologies A-1445, Jalan Tanjung Api 25050 Kuantan Pahang Darul Makmur Malaysia Ph: +60 9 565 8888 Fax: +60 9 514 3555 http://www.ttelectronics.com/magnetics/customer-service-enquiry



### **Electrical Characteristics**

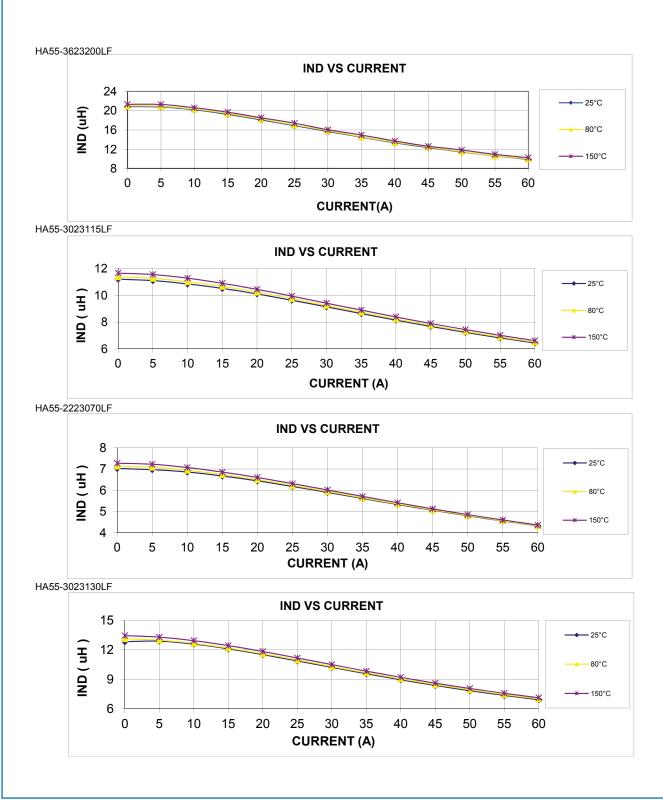


We reserve the right to change specifications without prior notice

#### General Note




## **Electrical Characteristics**

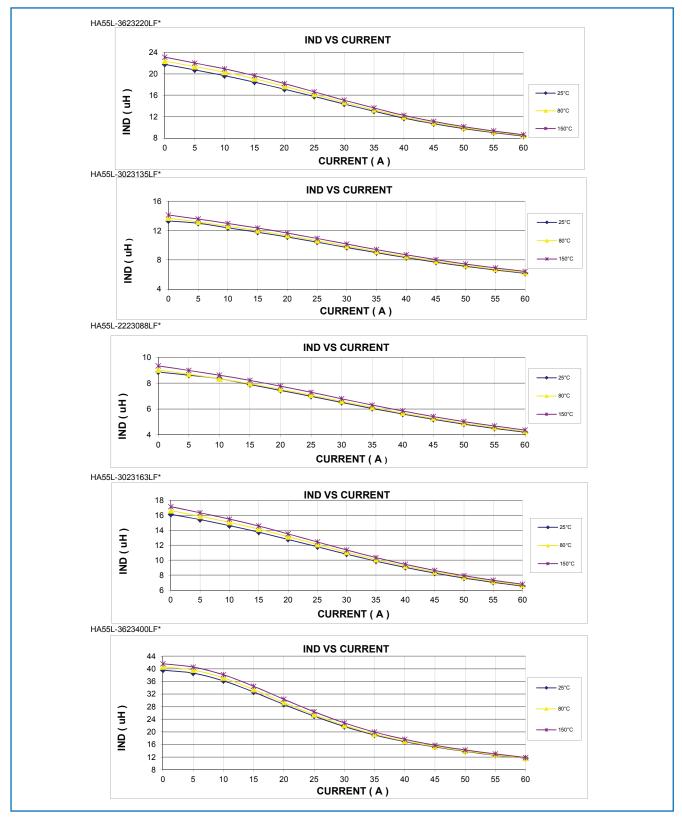

#### General Note




# **Electrical Characteristics**

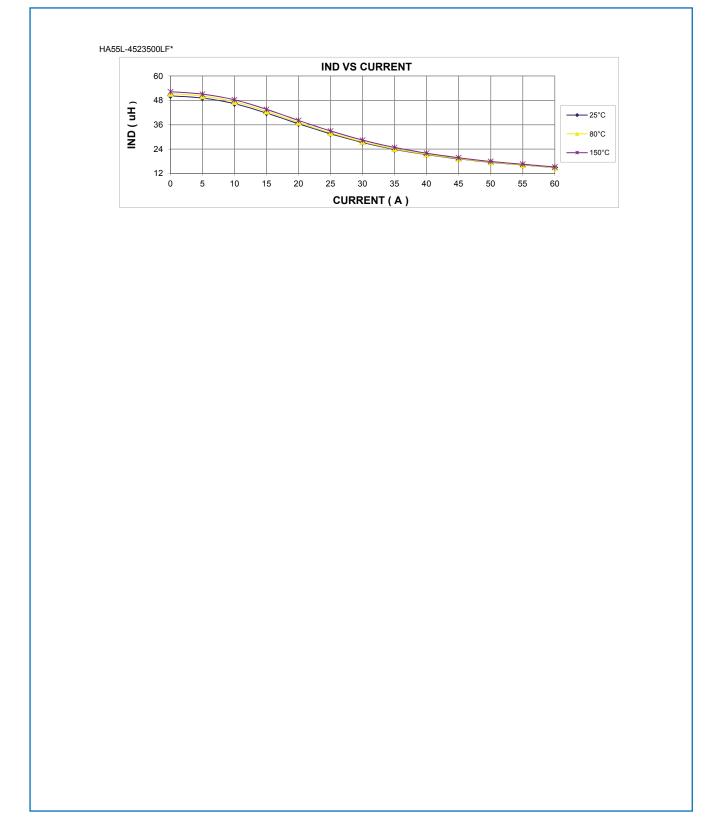

General Note



## **Electrical Characteristics**

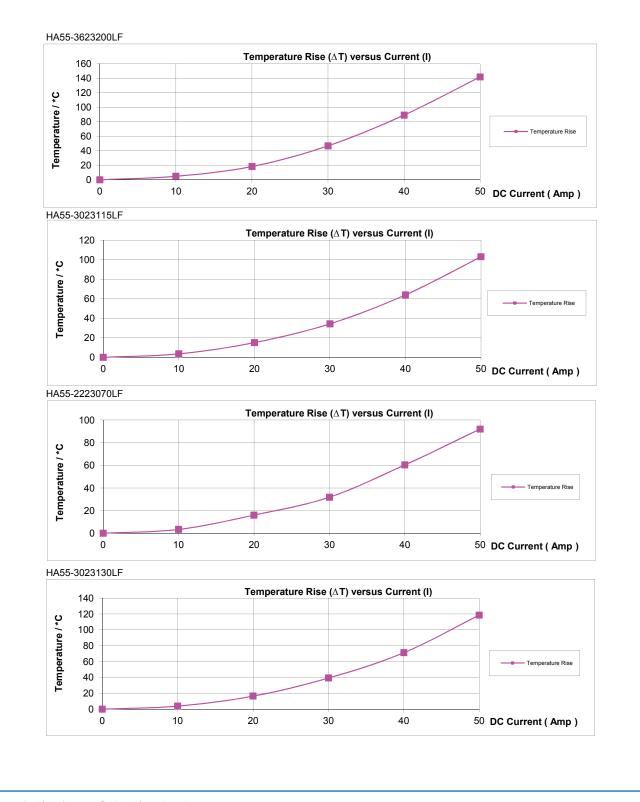


We reserve the right to change specifications without prior notice.

#### General Note



## **Electrical Characteristics**

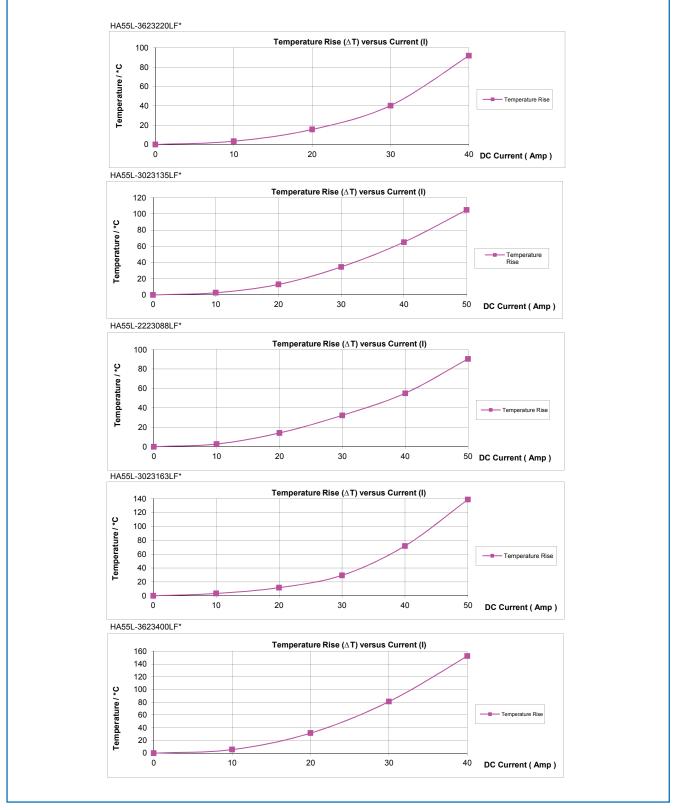


We reserve the right to change specifications without prior notice.

#### General Note



## **Electrical Characteristics**

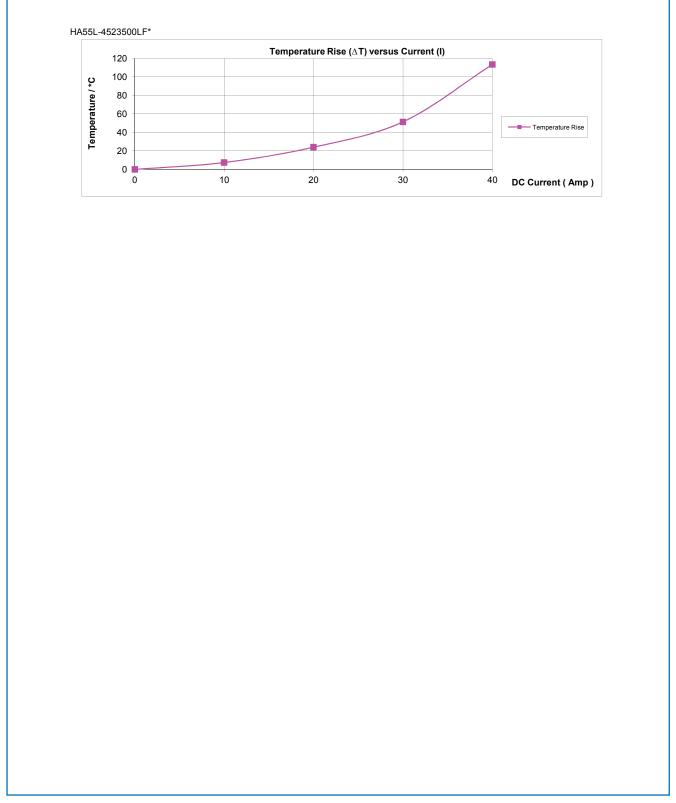


We reserve the right to change specifications without prior notice.

#### General Note




# Mechanical Outline (mm)

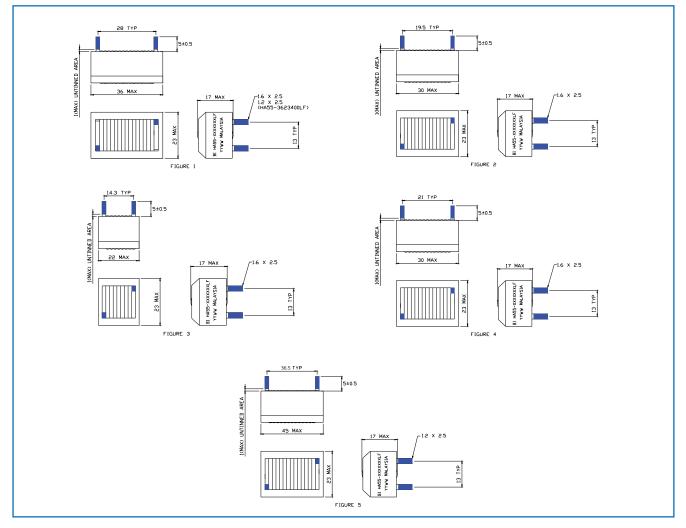

## Packaging

- (Packed in compact PE foam)
- 1) 1 shipping carton 72pcs (FOR CASE 3623 & 4523)
- 2) 1 shipping carton 108pcs (FOR CASE 3023)
- 3) 1 shipping carton 144pcs (FOR CASE 2223)

# Ordering Information

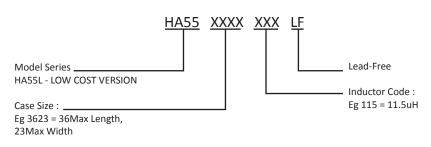

#### General Note

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

**TT Electronics**:

HA55-2223070LF HA55-3023115LF HA55-3023130LF HA55-3623200LF