

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.27	阿树

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:800V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤20mΩ

PART NO.:
X2000 W R S-XX-6T SN
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Category:W-Wafer
③Welding Board Angle:R-Stright 90°
④Welding Way:S-SMT
⑤Row No.Pin No:XX-02~15Pin
⑥Material: 6T-PA6T UL94V-0
⑦Planting:SN-Tin Plated

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.00	8.00	4.55	09	16.00	22.00	18.55
03	4.00	10.00	6.55	10	18.00	24.00	20.55
04	6.00	12.00	8.55	11	20.00	26.00	22.55
05	8.00	14.00	10.55	12	22.00	28.00	24.55
06	10.00	16.00	12.55	13	24.00	30.00	26.55
07	12.00	18.00	14.55	14	26.00	32.00	28.55
08	14.00	20.00	16.55	15	28.00	34.00	30.55

X2000WRS-XX-6TSN	PA6T	Brass	X2000HM
PART NO	Material	Material(Pin)	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	




DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE:	2.00mm Crimp Style Connectors
PART NO.:	X2000WRS-XX-6TSN
DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1

XKB INDUSTRIAL PRECISION CO.,LIMITED

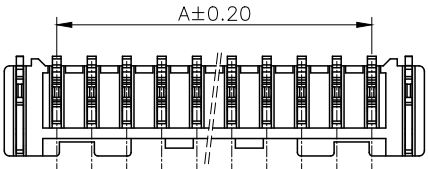

Schematic Diagram of
10, 11,12,13,14,15-Hole

