


The MAS-CON® product line consists of massterminated insulation displacement contact (IDC) connectors and mating headers and a broad line of application tooling. The connectors can be terminated to discrete wire or flat cable:

- ? Available in .100" cl and .156" cl contact spacing:
 - ? .100" cl can accommodate up to 4 Amps per contact and is available in 2 through 36 circuit sizes
 - ? .156" cl can accommodate between 8 and 12.5 Amps per contact and is available in 2 through 24 circuit sizes
- ? Connectors available for through or end terminations.
- ? Wire retainers on connectors hold wire in place prior to termination.
- ? Color-coded to identify proper wire gauge.
- ? Flat, polarized, and locking header styles available in straight and right angle configurations.
- ? Accessories available: covers, strain reliefs, polarizing keys, termination tooling and related items.
- ? Significant labor savings achieved via Pancon's unique termination tooling





[Request Literature](#)



[Request Samples](#)

Check out

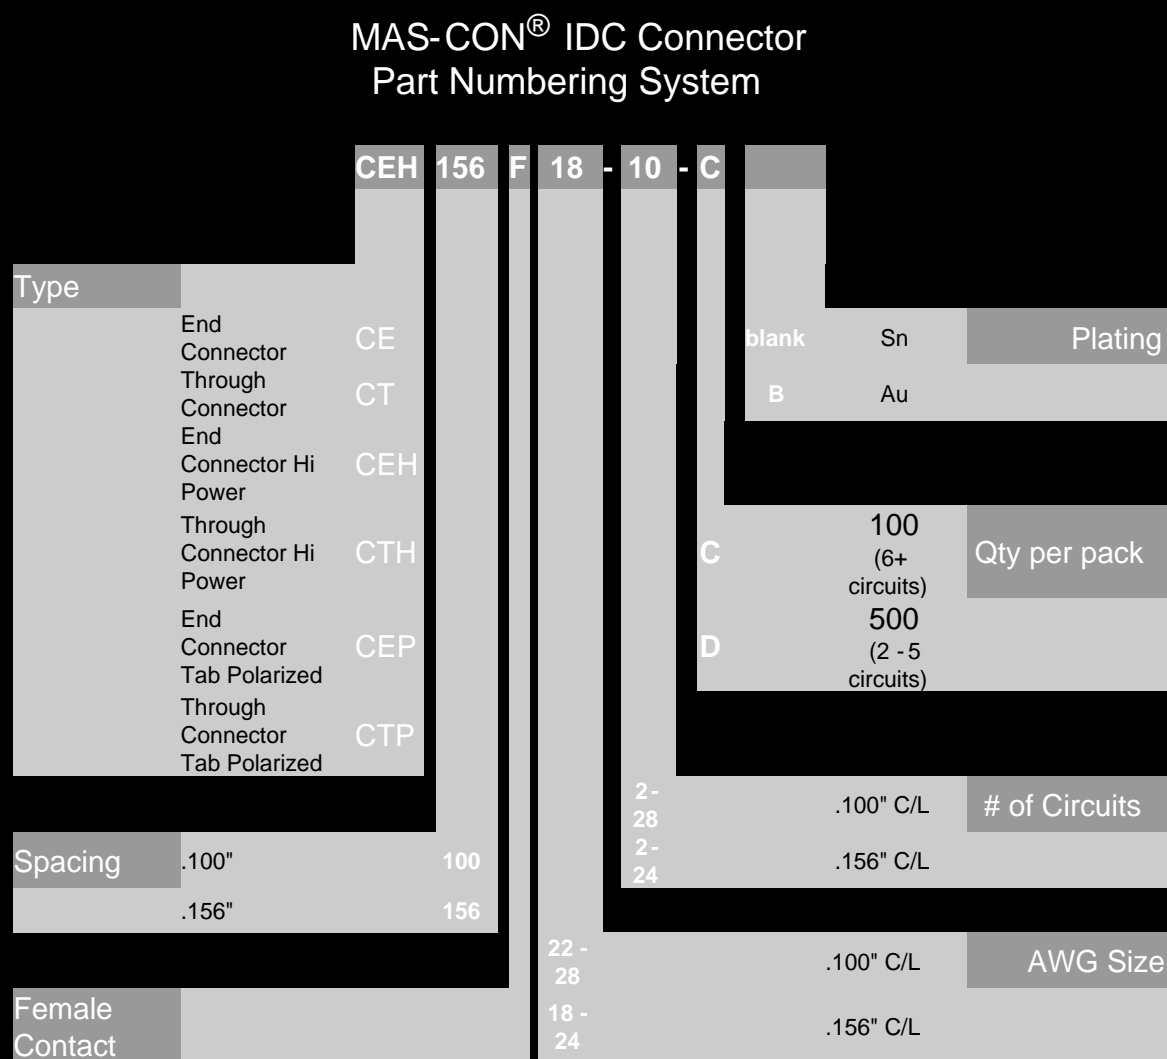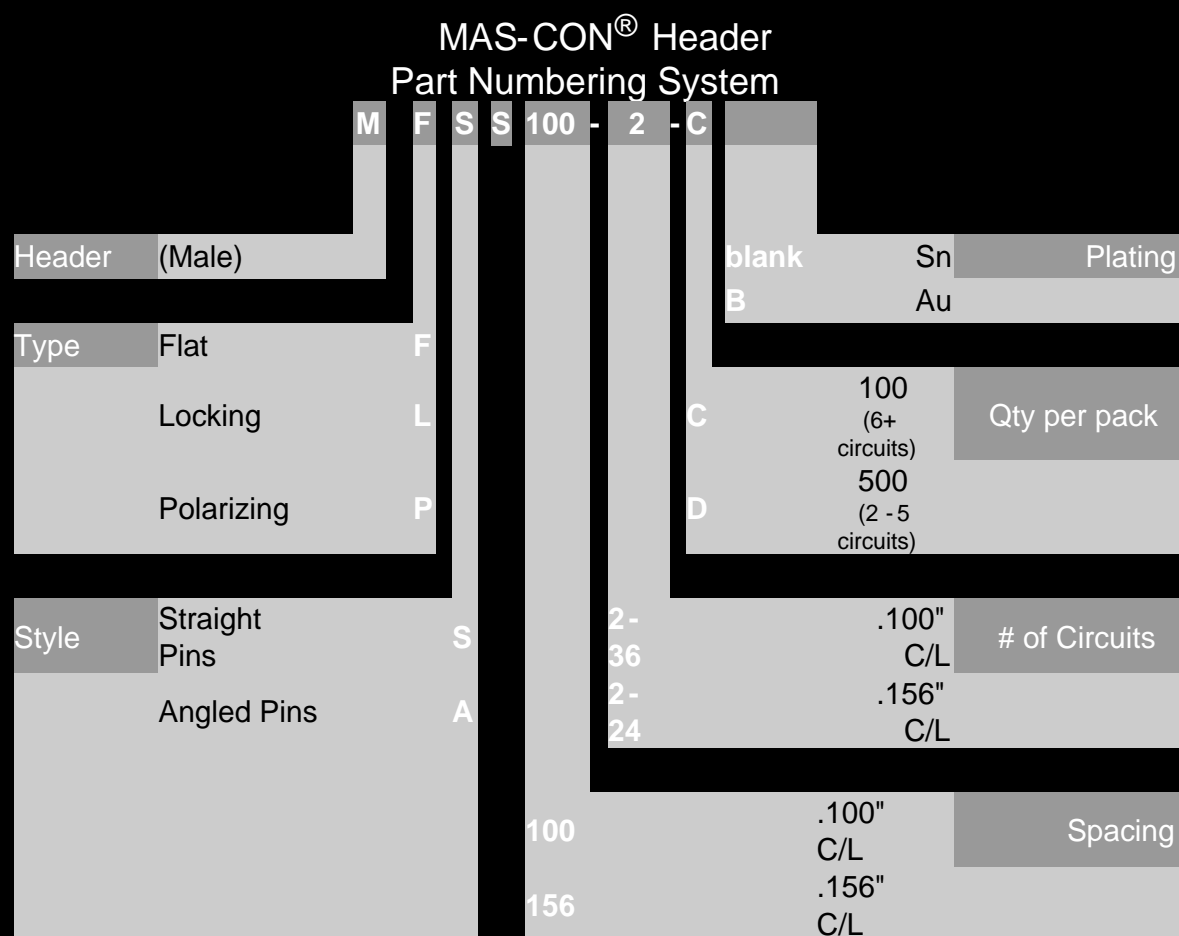

MAS-CON® Data sheets	
Mas-Con IDC Connectors	.156" End & Thru Connectors
.100" & .156" Mass Terminated Connectors	.156" High Power Connectors
.100" & .156" Headers	.156" Flat, locking & polar Headers
.100" End & Thru IDC Connectors	Technical data
.100 Flat, Locking & Polar Headers	Accessories
.100" Polarized Connectors	Tooling
.100" Tab Polarized Headers	.100" & .156" Connectors on Reels - Packaging
Flat Headers with custom length pins	Electric Termination Press
Variable Length Pin Headers	Press Fit Headers