

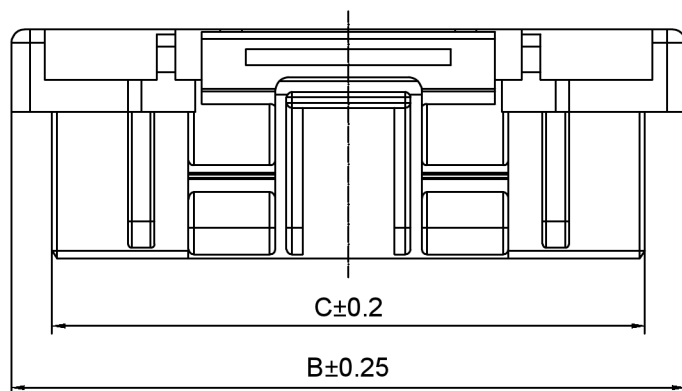
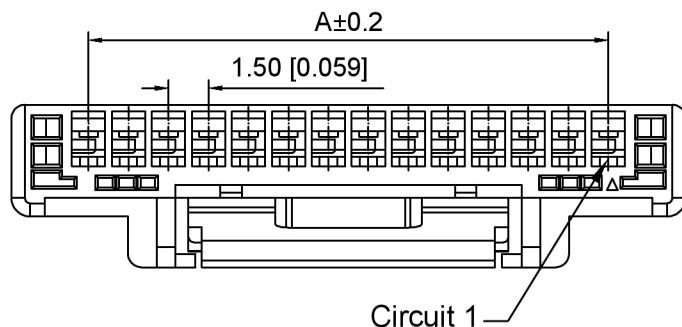


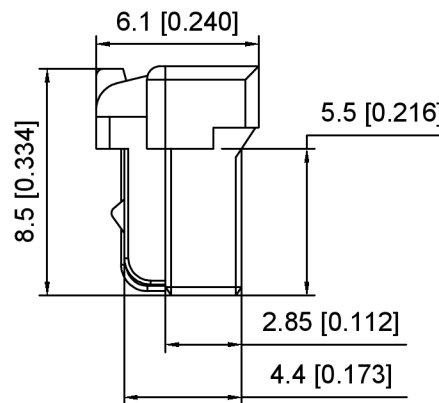


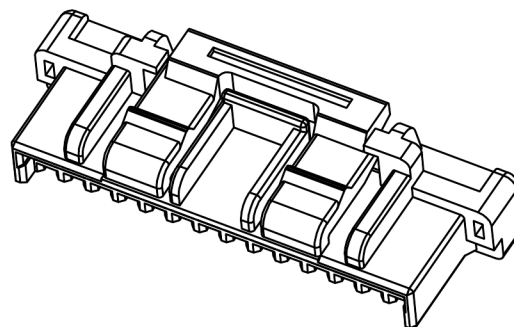

02P~03P Shape Scale 1:1

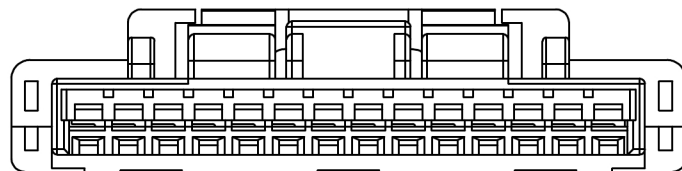

Specifications:

规格:

Voltage rating:100V AC/DC

额定电压: 100V AC/DC

Current rating:2A AC/DC

额定电流: 2A AC/DC

Withstanding voltage:500V AC/minute

耐受电压: 500V AC/分钟

Temperature range:-40℃~+105℃

温度范围: -40℃~+105℃

Insulation resistance:≥500MΩ

绝缘电阻: ≥500MΩ

Contact resistance:≤20mΩ

接触电阻: ≤20mΩ

X1515 H -XX - N0 HF
① ② ③ ④ ⑤

1.Series No

2.Category:H-HSG

3.Row No.Pin No:XX-02~15P

4.Material:N0-PA66 94V-0

5.HF:Halogen Free

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	1.50	7.30	4.25	09	12.00	17.80	14.75
03	3.00	8.80	5.75	10	13.50	19.30	16.25
04	4.50	10.30	7.25	11	15.00	20.80	17.75
05	6.00	11.80	8.75	12	16.50	22.30	19.25
06	7.50	13.30	10.25	13	18.00	23.80	20.75
07	9.00	14.80	11.75	14	19.50	25.30	22.25
08	10.50	16.30	13.25	15	21.00	26.80	23.75

X1515H-XX-N0HF	PA66	X1515W	X1515T
PART N0	Material	Suitable XKB Wafer	Suitable XKB Terminal

DSND		SCALE: N/A	MODEL TYPE: 1.5mm Crimp Style Connector		
DWN		VIEW: 	PART NO.: X1515H-XX-N0HF		
CHKD		UNIT: mm/in	DWG NO.: X-X1515H-XX-N0HF		
APPD		SIZE: A4			
L PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
				1/1	A0

XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED

广东星坤科技股份有限公司

Δx		日期
Δx		
Δx		
MARK		

文件工程章

					ANGULAR	±5°
					L≤ 4	±0.2
					4<L≤ 16	±0.3
					16<L≤ 63	±0.4
					L> 63	±0.5
					UNSPECIFIED TOLERANCES	

REVISIONS
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn