

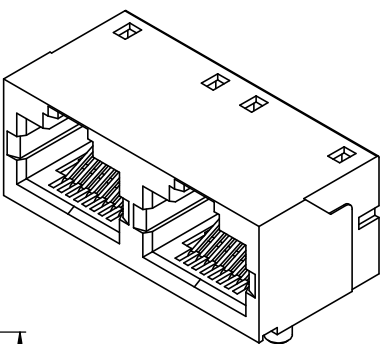
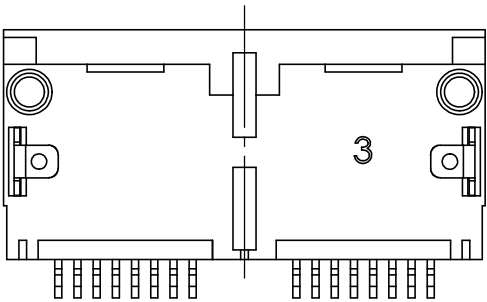
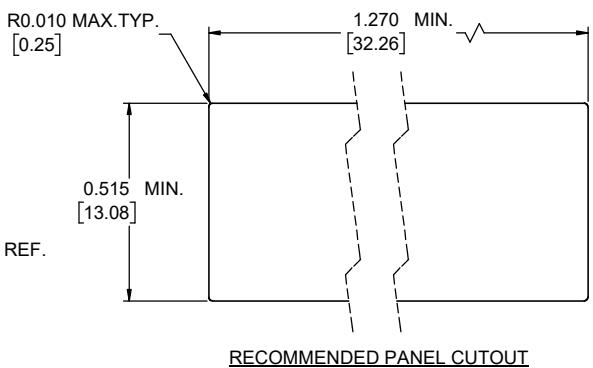
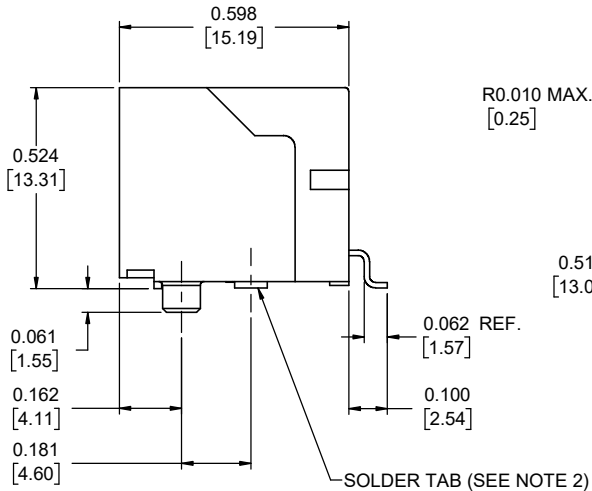


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	INITIAL DRAWING	APR26/18	L.CHAN
B	FIX ERROR AT 3D VIEW	AUG02/23	K.T.

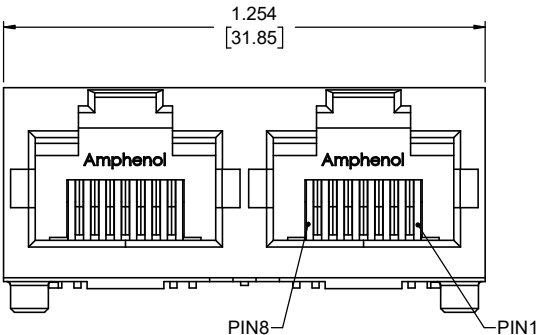

- NOTES:**
- MATERIALS:**  
 PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC  
 FLAMMABILITY RATING UL 94V-0, COLOR: BLACK  
  
 CONTACTS: PHOSPHOR BRONZE  
 PLATING: 20µ" [0.508 MICRONS] GOLD ON MATING SURFACES  
 50µ" [1.27 MICRONS] MIN. NICKEL UNDERPLATE  
 100µ" [2.54 MICRONS] MIN. MATTE TIN OR GOLD FLASH ON CONTACT TAILS.  
  
 SOLDER TAB: COPPER ALLOY WITH TIN PLATING
  - COPLANARITY SPECIFICATION:**  
 WITH THE MODULAR JACK SITTING ON A LEVEL SURFACE, THE MAXIMUM GAP BETWEEN THE LEVEL SURFACE AND ALL TERMINAL TAILS AND BOTH FITTING NAILS IS .004 [0.10]
  - RECOMMENDED SOLDERING TEMPERATURE:**  
 REFLOW SOLDERING AT 260 °C MAXIMUM FOR 10 SEC MAXIMUM
- PART NUMBER: RJSSE-5080-02

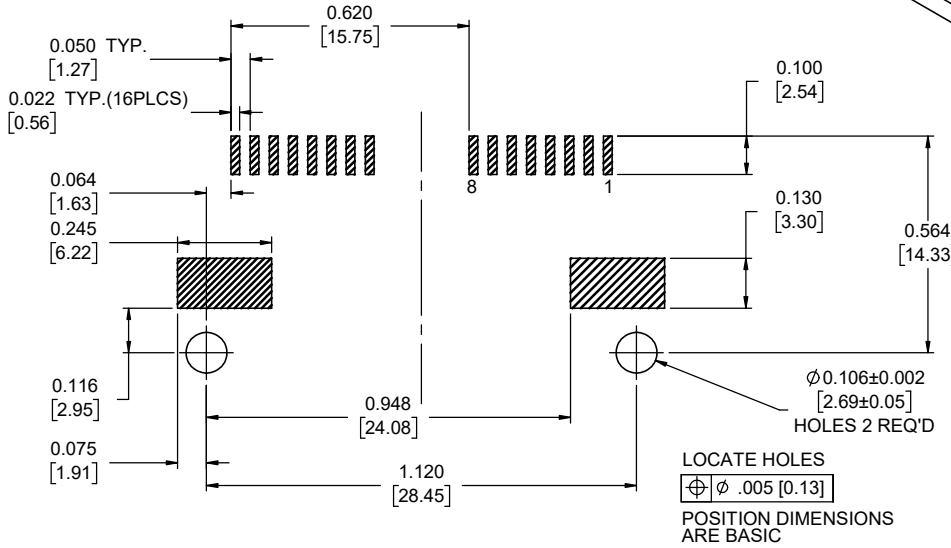

RECOMMENDED P.C.B. LAYOUT  
 (COMPONENT SIDE OF BOARD)  
 TOLERANCE: ± 0.05



UNLESS SPECIFIED OTHERWISE	DRAWN	RONNIE.C	APR26/18
PRIMARY UNITS INCHES	CHECKED	AMY.Z	APR26/18
SECONDARY MILLIMETERS	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE ±.025	ENG. REL. NO.		
2 DECIMAL PLACES ±.020	REF. EAR#:	RJ18088	
3 DECIMAL PLACES ±.015	THIRD ANGLE PROJECTION		
ANGULAR DEGREES ±1.0°	DO NOT SCALE DRAWING		

**Amphenol Canada Corp.**  
 Commercial Products

2PORT MODULAR JACK, SURFACE MOUNT, UNSHIELD, WITH HOLD DOWN BRACKET, 8P8C, TRAY PACKAGE - RoHS COMPLIANT

DWG. NO. P-RJSSE-5080-02 REV B

CODE ID NO. 03554 DWG SIZE: X SCALE: 4:1 SHEET 1 OF 1