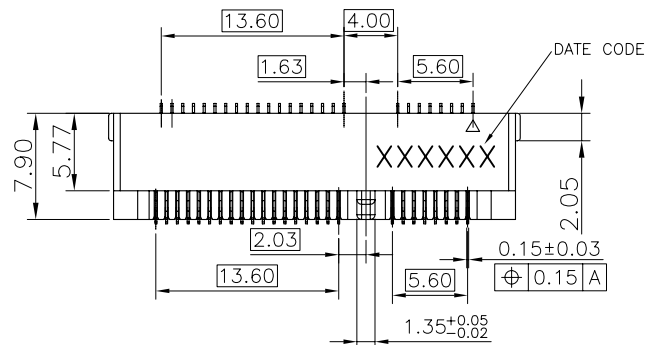
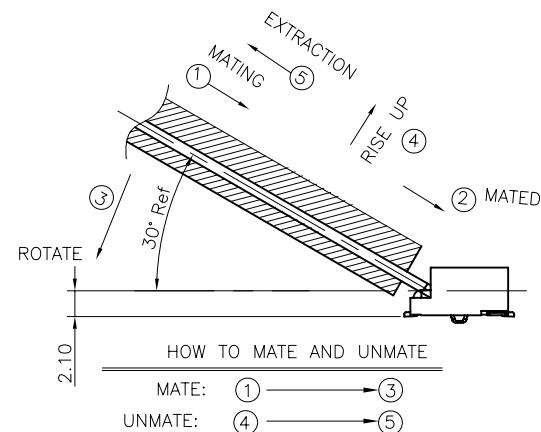
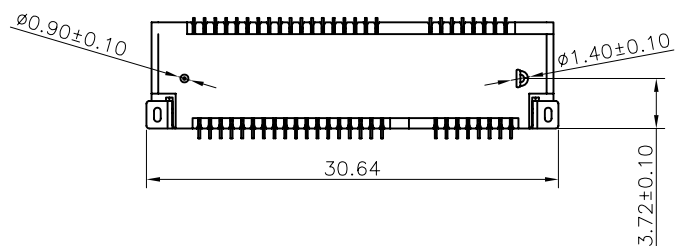
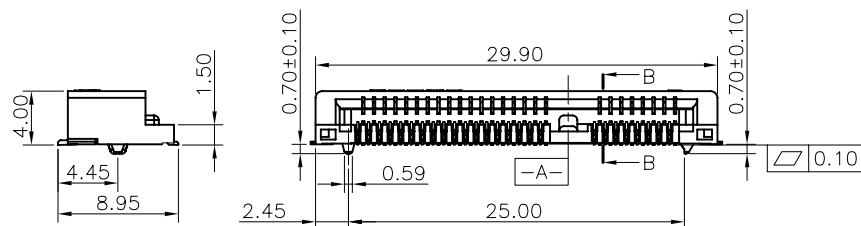
SECTION B-B
SCALE 2:1

NOTES:

1. MATERIAL:

- 1). HOUSING: LCP BLACK OR WHITE UL94V-0.
- 2). CONTACT: BRASS.
- 3). PADS: BRASS.

2. FINISH:

2.1 CONTACTS:

- 1). 50 μ MIN Ni UNDER PLATED OVER ALL.
- 2). Au PLATING ON CONTACT AREA (SEE TABLE), AND ON SOLDER AREA.

2.2 PADS:

- 1). 60 μ MIN Ni UNDER PLATED OVER ALL.
- 2). MATTE-Tin 100 μ MIN ON SOLDER AREA.

3. MECHANICAL PERFORMANCE,

MATING & UNMATING FORCE: 2.3 Kgf MAX.

4. ELECTRICAL PERFORMANCE,

- 4-1. VOLTAGE RATING: 50 V AC PER CONTACT.
- CURRENT RATING: 0.5 A.

- 4-2. LLCR: INITIAL 55m Ω MAX PER CONTACT..
- FINAL 20m Ω MAX

- 4-3. INSULATION RESISTANCE:
- 500M Ω MIN

- 4-4. DIELECTRIC WITHSTAND VOLTAGE:

AC 300V FOR 1 MINUTE BETWEEN ADJACENT CONTACTS.
NO BREAKDOWN OR FLASH.
CURRENT LEAKAGE: 1mA.

5. IR REFLOW:

THE PEAK TEMPERATURE ON THE BOARD SHALL BE
MAINTAINED FOR 10 SECONDS AT 260 $\pm$ 5 $^{\circ}$ C.



深圳市华宇创精密电子有限公司

TOLERANCE:

x.x $\pm$ 0.30
x.xx $\pm$ 0.25
x.xxx $\pm$ 0.15
x.' $\pm$ 2" x.x' $\pm$ 0.5"



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

MINI PCI-E 4.0H

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYCW03-PCI52-400B

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23







DRAW NO:

HYC-PCI17032715

SHEET NO.

1 OF 1



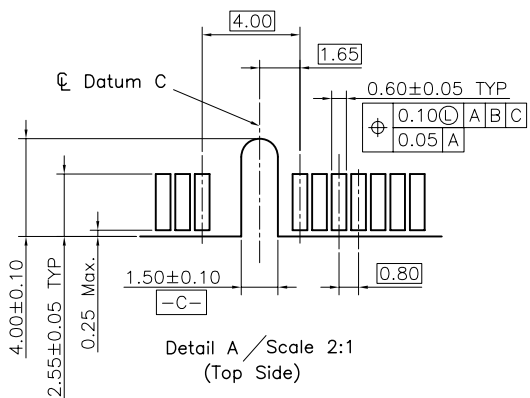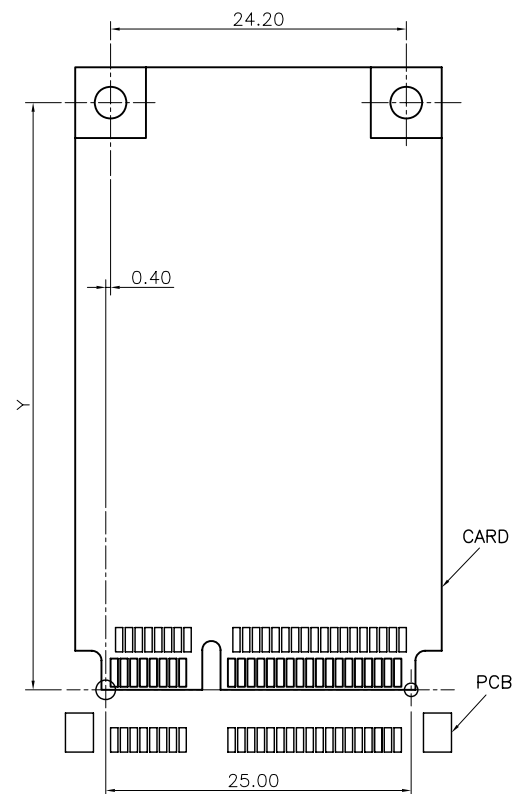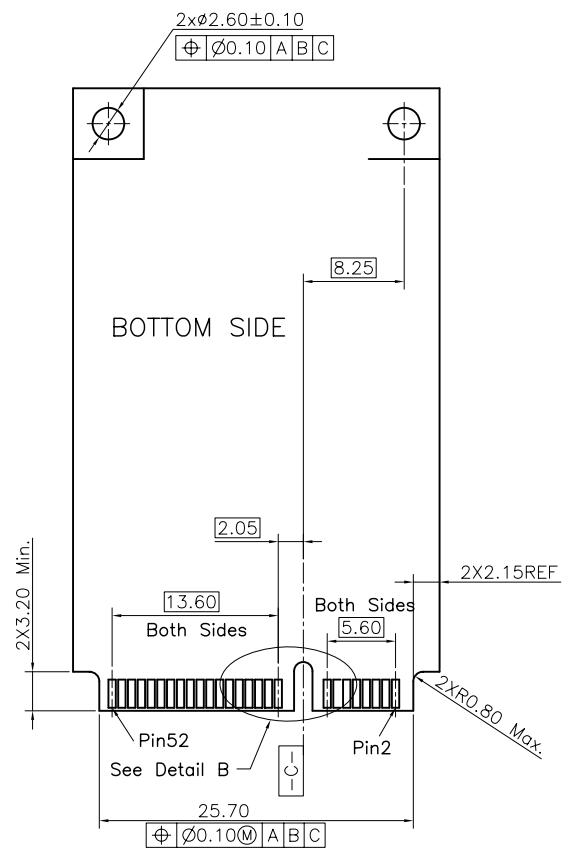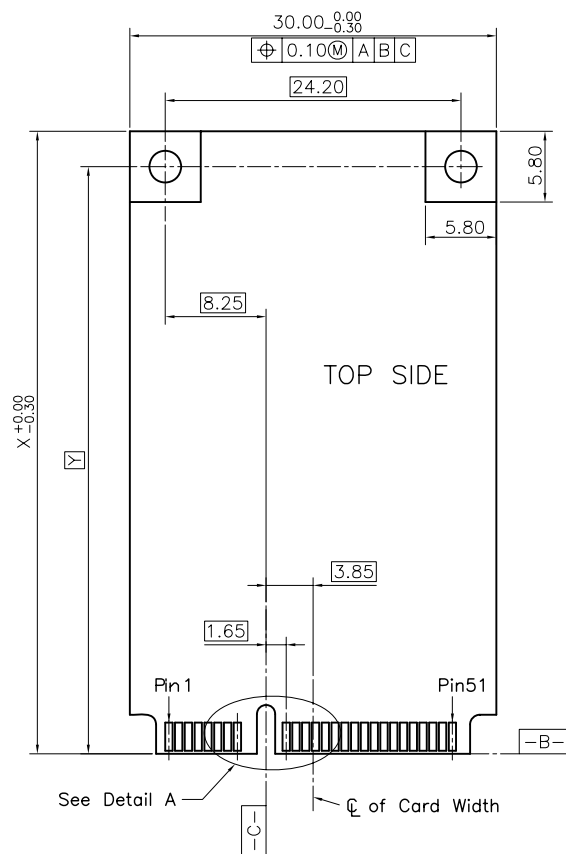

	DIM X	DIM Y
Half-Mini Card	26.80	23.90
Full-Mini Card	50.95	48.05



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2" X.X' ±0.5"



UNIT: mm [inch]

SCALE:1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱敏

DATE :

2014-02-23

PART NAME:

MINI PCI-E 4.0H

PART NO.

HYCW03-PCI52-400B




MOLD NO.

DRAW NO:

HYC-PCI17032715


SHEET NO.

1 OF 1

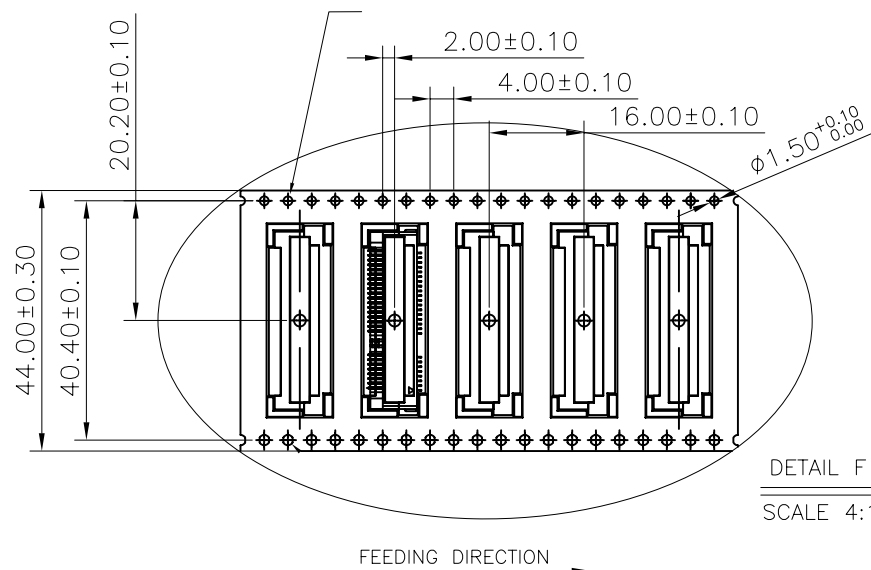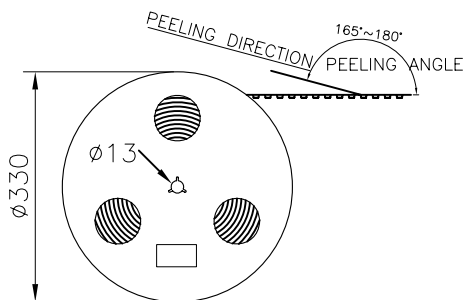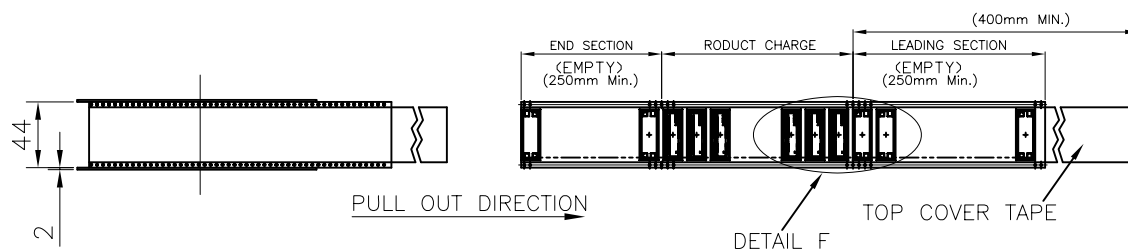

NOTES:

- MATERIAL :
 - CARRY TAPE: PS
 - COVER TAPE: PET
 - SHIPPING CARTON: CORRUGATED FIBER
- DIMENSION :
 - REEL: W=44.5, $\phi A=330$
 - SHIPPING CARTON: L=335, W=335, H=300 (INNER)
- QUANTITY :
 - PRIMARY PACKING: 700 PCS/REEL
 - SECONDARY PACKING: 6 REELS/CARTON(4200PCS)
- WEIGHT :
 - NET WEIGHT: 4.956Kg/CARTON.
 - GROSS WEIGHT: 8.892Kg/CARTON.
- PEELING RESISTANCE: 20gf~120gf.
- PEELING SPEED: 300mm/minutes.

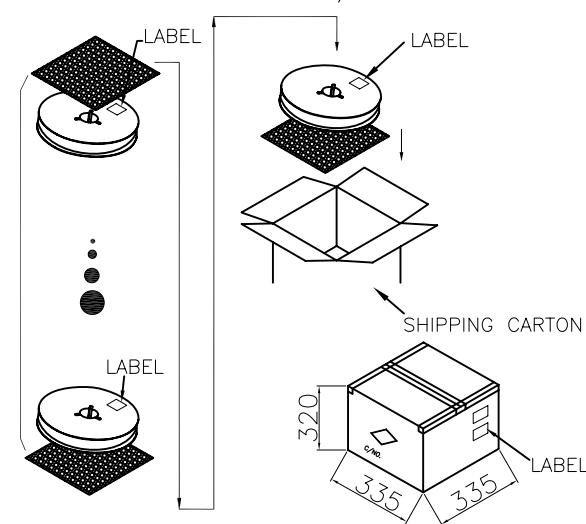

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1