


Features

- excellent power handling
- Small size
- 7 sections
- temperature stable
- LTCC construction with great moisture resistance, corrosion resistance, and high reliability

Applications


- sub-harmonic rejection
- transmitters/receivers
- base station of mobile communication and lab use

HT-HFCN-2100+



50 Ω 2200 to 6000 MHz

electrical schematic

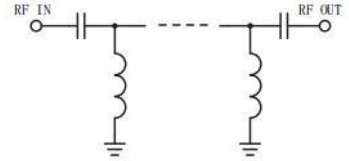

Pin Connections

RF IN	1
RF OUT	3
GROUND	2,4

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input 7W at 25°C

* Passband rating, derate linearly to 3.5W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.


Electrical Specifications (T_{AMB}= 25° C)

STOP BAND (MHz)		FCO(MHz) Nom.	PASS BAND (MHz)		VSWR (:1)		POWER INPUT (W)	NO. OF SECTIONS
(Loss>27dB) Min.	(Loss>20dB) Min.	(Loss 3dB) Typ.	(Loss<1.3dB) Max.	(Loss<2dB) Typ.	Stopband Frequency (MHz) Typ. 1.5:1			
1050	1530	2100	2500-5000	2200-6000	20-1	2400-5200	7	7


Typical Performance Data at 25° C

Frequency (MHz)	Return Loss (dB)	Insertion Loss (dB)	VSWR (:1)
1	0.01	75.67	1249.77
100	0.10	49.62	179.83
1050	0.32	29.20	54.45
1530	0.52	28.37	33.51
1700	1.33	16.17	13.08
1900	4.87	4.26	3.66
2000	4.66	3.74	3.82
2100	6.20	2.73	2.92
2200	8.79	1.89	2.14
2400	15.74	1.10	1.39
2500	19.40	0.94	1.24
5000	11.95	1.24	1.68
5200	10.69	1.56	1.83
6000	11.93	2.45	1.68
7000	21.92	1.17	1.17
9000	7.44	2.20	2.48


HT-HFCN-2100+. s2p

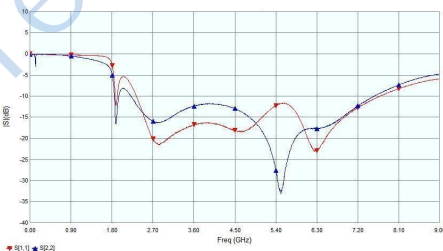

HT-HFCN-2100+. s2p



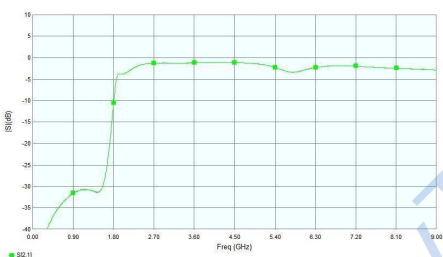


Demo Board P/N: T-39 Suggested PCB Layout (PL-137)

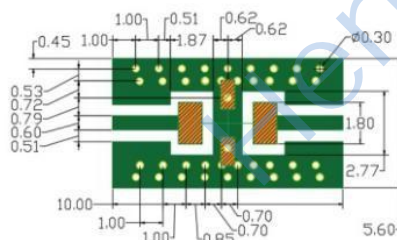

- ES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350 WITH THICKNESS .508" ± .0015".
COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Drawing

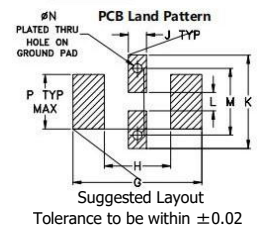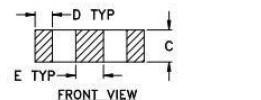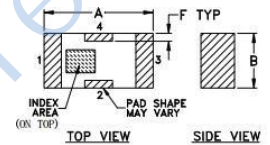

Outline Dimensions: Unit (mm)

Dimension	Value	Dimension	Value	Dimension	Value
A	3.20	B	1.60	C	0.95
D	0.51	E	0.81	F	0.23
G	4.29	H	2.21	J	0.61
K	3.10	L	0.61	M	2.21
N	0.30	P	1.8	wt	0.02g