

WL2848E

Low noise, High PSRR, High speed, CMOS LDO

Descriptions

The WL2848E series is a high accuracy, low noise, high speed, high PSRR, low dropout CMOS Linear regulator with high ripple rejection. The devices offer a new level of cost effective performance in cellular phones, laptop and notebook computers, and other portable devices.

The WL2848E occupies the soft-start function, which can prevent input inrush current, and has the fold-back maximum output current which depends on the output voltage. So the current limit functions both as a short circuit protection and as an output current limiter.

The WL2848E regulators are available in standard SOT-23-5L Package. Standard products are Pb-free and Halogen-free.

Features

- Input Voltage Range : 1.9V~5.5V
- Output Voltage Range : 1.2V~3.3V
- Output current : 300mA
- Quiescent current : 58 μ A Typ
- Shut-down current : <1 μ A
- Dropout voltage : 149mV @ I_{OUT}=0.3A
- PSRR : 74dB @ 1kHz, V_{OUT}=2.8V
- Low Output Voltage Noise : 15 \times V_{OUT} μ V_{RMS}
- V_{OUT} accuracy : \pm 1.5% @ V_{OUT}>2V
- Recommend output capacitor : 1 μ F
- Thermal-Overload and Short-Circuit Protection

Applications

- MP3/MP4 Players
- Cellphones, radiophone, digital cameras
- Bluetooth, wireless handsets
- Others portable electronics device



Figure 1: SOT-23-5L (Package)




Figure 2: Marking (Top View)

2848 : Device Code
 LL : Voltage Code
 Y : Year Code
 W : Week Code

For detail marking information, please see page 11.

Order Information

For detail order information, please see page 11.

Pin Information




Figure 3: Pin Information(Top View)

Table 1

PIN	Symbol	Description
1	V_{IN}	Unregulated input supply. A $1\mu\text{F}$ or larger capacitor can improve source impedance, noise, or PSRR.
2	GND	Ground.
3	EN	Driving this pin high can turn on the regulator. Driving this pin low and then the regulator operates into shutdown mode. EN pin must not be left floating and can be connected to V_{IN} if not used.
4	NC	No connection. Tie this pin to ground to improve thermal dissipation.
5	V_{OUT}	Regulator output. A $1\mu\text{F}$ or larger capacitor is required for stability.

Block Diagram

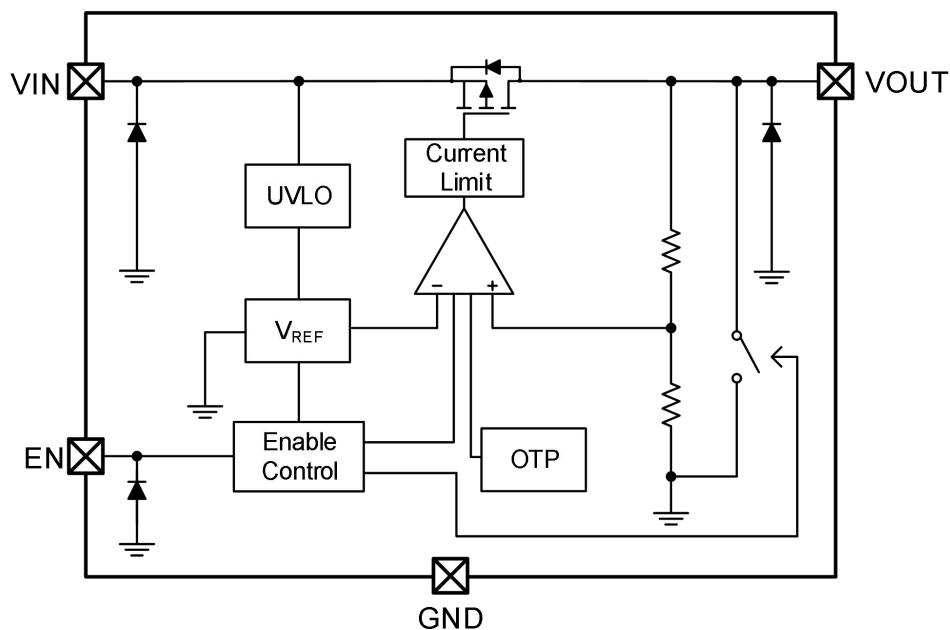


Figure 4: Block Diagram

Typical Application

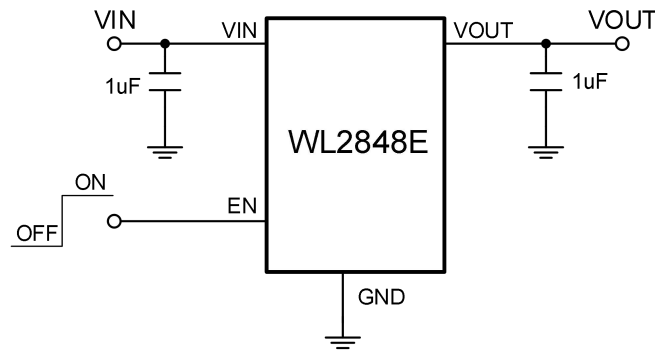


Figure 5: Typical Applications

Note: A 1uF or larger capacitor is required for stability both in the input and output side. The minimum effective capacitance needs to be no smaller than 0.4uF when considering the DC-Bias characteristic, tolerance and temperature.

Absolute Maximum Ratings

Table 2

Parameter	Symbol	Values		Unit
		Min	Max	
Input Voltage	V_{IN}	-0.3	6.0	V
Output Voltage	V_{OUT}	-0.3	V_{IN}	V
Enable input voltage	V_{EN}	-0.3	V_{IN}	V
Output Current	I_{OUT}	Internally Limited		A
Lead Temperature Range	T_L		260	°C
Storage Temperature Range	T_{STG}	-55	150	°C
Maximum Operating Junction Temperature Range	T_J (Max)	-55	150	°C
Moisture Sensitivity Level	MSL	Level 1		
ESD Capability, Human Body Model	ESD_{HBM}	7500		V
ESD Capability, Charge Device Model	ESD_{CDM}	1500		V

Stresses exceeding those listed in the Maximum Ratings table may damage the device.

Recommended Operating Conditions

Table 3

Parameter	Symbol	Values		Unit
		Min	Max	
Input Voltage ⁽¹⁾	V_{IN}	1.9	5.5	V
Output Voltage	V_{OUT}	1.2	3.3	V
Output Current	I_{OUT}	0	300	mA
Input effective capacitor ⁽²⁾	C_{IN}	0.4		uF
Output effective capacitor ⁽²⁾	C_{OUT}	0.4		uF
Operating Junction Temperature	T_J	-40	125	°C
Operating Ambient Temperature Range	T_A	-40	85	°C

(1) The minimum input voltage should be larger than ($V_{OUT}+V_{DROD}$) or 1.9V, whichever is greater.

(2) The recommended capacitor is 1uF and the minimum effective capacitance needs to be no smaller than 0.4uF.

Thermal Characteristics

Table 4

Parameter	Symbol	Values	Unit
Junction-to-ambient Thermal Resistance ⁽¹⁾	$R_{\theta JA}$	190	°C/W

Thermal resistance data is highly application and board-layout dependent. In applications where high maximum power dissipation exists, special care must be paid to thermal dissipation issues in board design.

(1) Single component mounted on 2oz, 1.5*1.5 inch² FR4 PCB with 1.0*1.0 inch² Cu area.

Electrical Characteristics


Over T_J from -40°C to $+85^{\circ}\text{C}$, $V_{IN}=V_{OUT}+1\text{V}$, $V_{EN}=V_{IN}$, $I_{OUT}=1\text{mA}$, $C_{IN}=1\mu\text{F}$, $C_{OUT}=1\mu\text{F}$, unless otherwise noted. Typical values are at $T_J=25^{\circ}\text{C}$.

Table 5

Parameter	Symbol	Test Conditions	Values			Unit	
			Min	Typ	Max		
Input Voltage	V_{IN}		1.9		5.5	V	
V_{IN} Under Voltage Lockout	$V_{IN\ UVLO}$	Rising, $I_{OUT}=1\text{mA}$	1.66	1.75	1.84	V	
		Falling, $I_{OUT}=1\text{mA}$	1.55	1.64	1.73	V	
Output Voltage Accuracy	V_{OUT}	$V_{IN}=V_{OUT}+1\text{V}$, $T_A=25^{\circ}\text{C}$	$V_{OUT}\leq 2.0\text{V}$	-30		30	mV
			$V_{OUT}>2.0\text{V}$	-1.5		1.5	%
Dropout Voltage	V_{DROP}	$V_{OUT}>0.98\times V_{OUT(NOM)}$	$V_{OUT(NOM)}=3.3\text{V}$, $I_{OUT}=300\text{mA}$		130	200	mV
			$V_{OUT(NOM)}=3.0\text{V}$, $I_{OUT}=300\text{mA}$		141	212	
			$V_{OUT(NOM)}=2.8\text{V}$, $I_{OUT}=300\text{mA}$		149	223	
			$V_{OUT(NOM)}=1.8\text{V}$, $I_{OUT}=300\text{mA}$		228	355	
Line Regulation	ΔV_{LINE}	$V_{OUT}+1\text{V}\leq V_{IN}\leq 5.5\text{V}$, $I_{OUT}=1\text{mA}$		1	6	mV	
Load Regulation	ΔV_{Load}	$V_{IN}=V_{OUT}+1\text{V}$, $I_{OUT}=1\text{mA}\sim 300\text{mA}$		22	39	mV	
Quiescent Current	I_Q	$I_{OUT}=0\text{mA}$		58	105	μA	
Shut-down Current	I_{SHDN}	$V_{EN}=0\text{V}$, $1.9\text{V}\leq V_{IN}\leq 5.5\text{V}$			1.0	μA	
Output Current Limit	I_{CL}	$V_{OUT}=0.85\times V_{OUT(NOM)}$, $V_{IN}\geq V_{OUT(NOM)}+1\text{V}$		700		mA	
Short Current	I_{SHORT}	$V_{EN}=V_{IN}$, V_{OUT} short to GND		140		mA	
Power Supply Rejection Rate	PSRR	$V_{IN}=(V_{OUT}+1\text{V})_{DC}+0.5\text{V}_{P-P}$ $I_{OUT}=10\text{mA}$, $V_{OUT}=2.8\text{V}$, $C_{IN}=0\mu\text{F}$, $C_{OUT}=1\mu\text{F}$	$f=100\text{Hz}$		73		dB
			$f=1\text{kHz}$		74		dB
			$f=10\text{kHz}$		69		dB
			$f=100\text{kHz}$		56		dB
			$f=1\text{MHz}$		58		dB
EN Logic High Voltage	V_{ENH}	$V_{IN}=V_{OUT}+1\text{V}$, $I_{OUT}=1\text{mA}$	0.82			V	
EN Logic Low Voltage	V_{ENL}	$V_{IN}=V_{OUT(NOM)}+1\text{V}$, $V_{OUT}=0\text{V}$			0.4	V	
EN Input Current	I_{EN}	$V_{EN}=V_{IN}=5.5\text{V}$		0.5		μA	
Output Noise Voltage	e_{NO}	$V_{IN}=V_{OUT}+1\text{V}$, $C_{OUT}=1\mu\text{F}$, $I_{OUT}=100\text{mA}$, 10Hz to 100KHz		$15\times V_{OUT}$		μV_{RMS}	
Thermal Shutdown Threshold	T_{SD}			160		$^{\circ}\text{C}$	
Thermal Shutdown hysteresis	ΔT_{SD}			30		$^{\circ}\text{C}$	
Output Auto-discharge Resistance	R_{LOW}	$V_{IN}=4.0\text{V}$, $V_{EN}=0\text{V}$, $V_{OUT}=2.8\text{V}$		237		Ω	
Turn-On Time	T_{on}	From assertion of EN signal to 90% $V_{OUT(NOM)}$, $C_{IN}=1\mu\text{F}$, $C_{OUT}=1\mu\text{F}$, $I_{OUT}=1\text{mA}$, $V_{IN}=V_{OUT}+1\text{V}$	$V_{OUT}=2.8\text{V}$		1.0	2.00	ms
			$V_{OUT}=1.8\text{V}$		0.8	1.82	
			$V_{OUT}=1.2\text{V}$		0.7	1.52	
V_{OUT} Rise Time	trise	V_{OUT} from 10% to 90% $V_{OUT(NOM)}$, $C_{IN}=C_{OUT}=1\mu\text{F}$, $I_{OUT}=1\text{mA}$, $V_{IN}=V_{OUT}+1\text{V}$	$V_{OUT}=2.8\text{V}$		320		us
			$V_{OUT}=1.8\text{V}$		180		
			$V_{OUT}=1.2\text{V}$		100		

Typical characteristics

At $V_{OUT}=2.8V$, $V_{IN}=V_{OUT}+1V$ or $1.9V$ (whichever is greater), $I_{OUT}=1mA$, $C_{IN}=1\mu F$, $C_{OUT}=1\mu F$, $V_{EN}=2.2V$ and $T_J=25^\circ C$, unless otherwise noted.

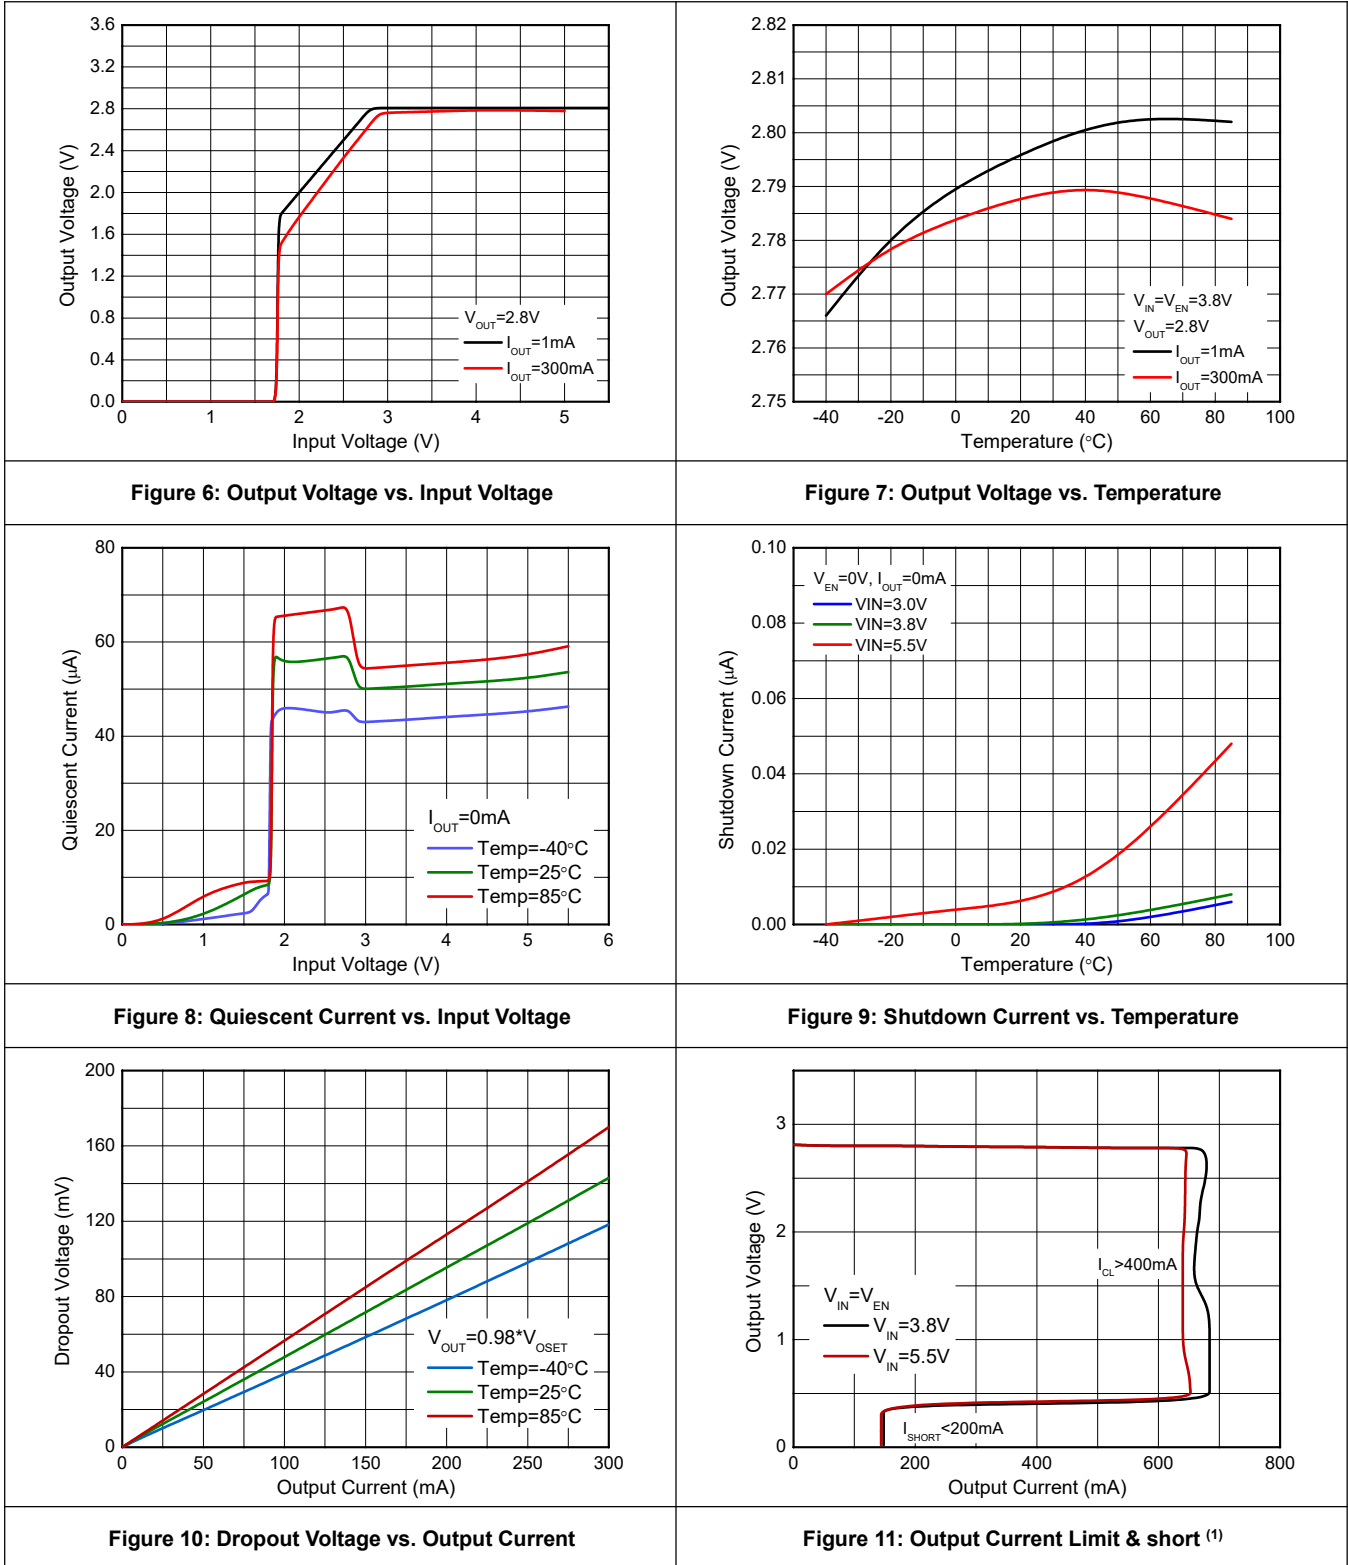

(1) For the overload condition, the output current is limited since LDO operates in the OCL mode. During this process, with the load increase, the output voltage reduces while the output current is always around I_{CL} . When V_{OUT} reduces low enough ($V_{OUT}<0.2V$), the LDO will operate into the short mode and the output current equals to the short current I_{SHORT} .

Typical characteristics (Continued)

At $V_{OUT}=2.8V$, $V_{IN}=V_{OUT}+1V$ or $1.9V$ (whichever is greater), $I_{OUT}=1mA$, $C_{IN}=1\mu F$, $C_{OUT}=1\mu F$, $V_{EN}=2.2V$ and $T_J=25^\circ C$, unless otherwise noted.

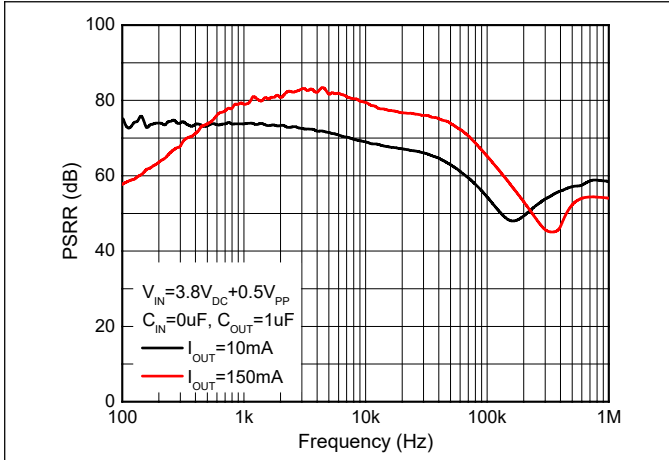


Figure 12: PSRR vs. Frequency ($V_{DROP}=1V, C_{OUT}=1\mu F$)

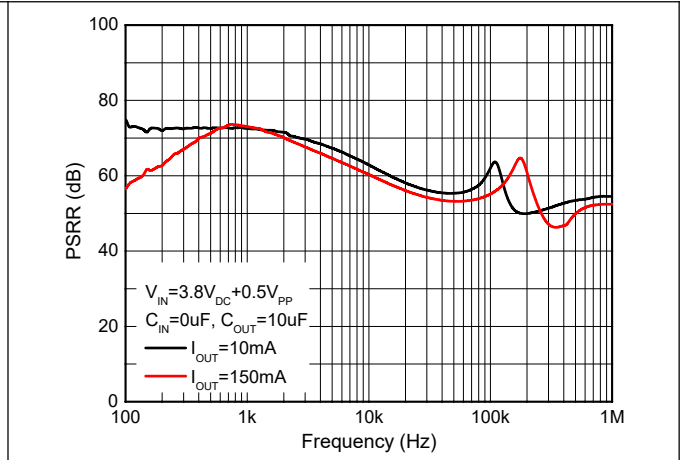


Figure 13: PSRR vs. Frequency ($V_{DROP}=1V, C_{OUT}=10\mu F$)

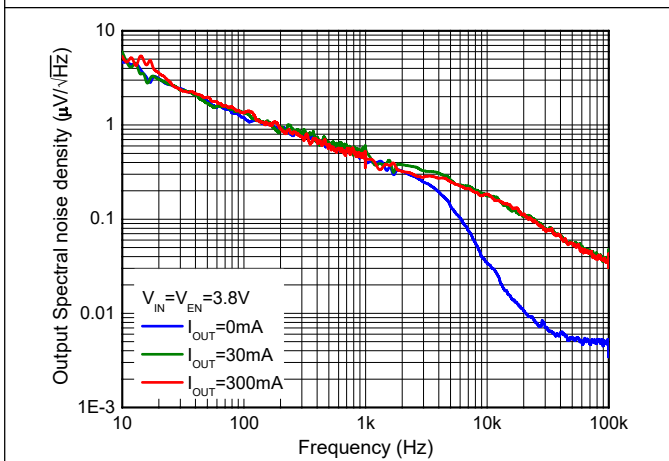


Figure 14: Output Spectral Noise Density vs. Frequency

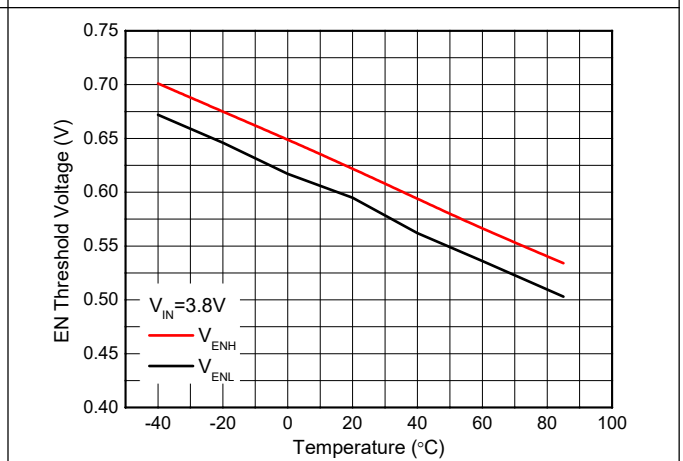


Figure 15: EN Threshold Voltage vs. Temperature

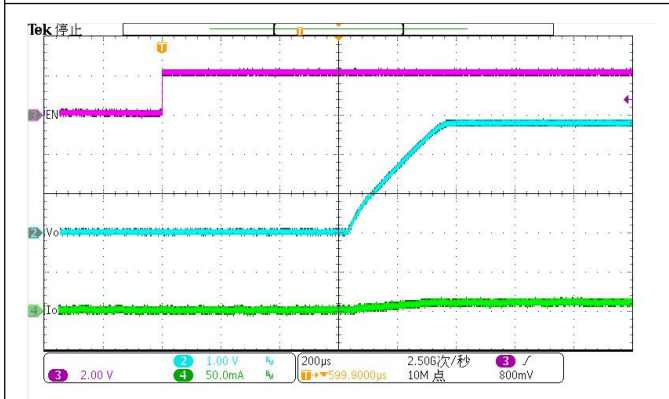


Figure 16: Soft Start-Up from EN ($I_{OUT}=10mA$)

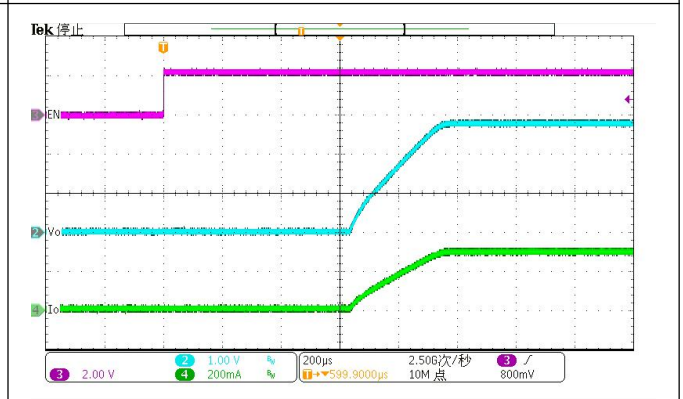


Figure 17: Soft Start-Up from EN ($I_{OUT}=300mA$)

Typical characteristics (Continued)

At $V_{OUT}=2.8V$, $V_{IN}=V_{OUT}+1V$ or $1.9V$ (whichever is greater), $I_{OUT}=1mA$, $C_{IN}=1\mu F$, $C_{OUT}=1\mu F$, $V_{EN}=2.2V$ and $T_J=25^\circ C$, unless otherwise noted.

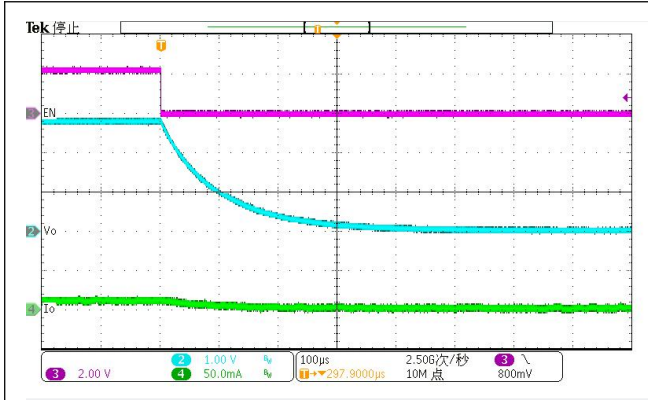


Figure 18: Shutdown from EN ($I_{OUT}=10mA$)

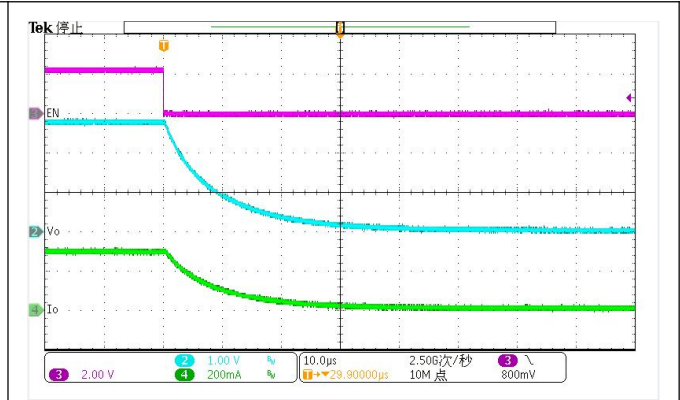


Figure 19: Shutdown from EN ($I_{OUT}=300mA$)

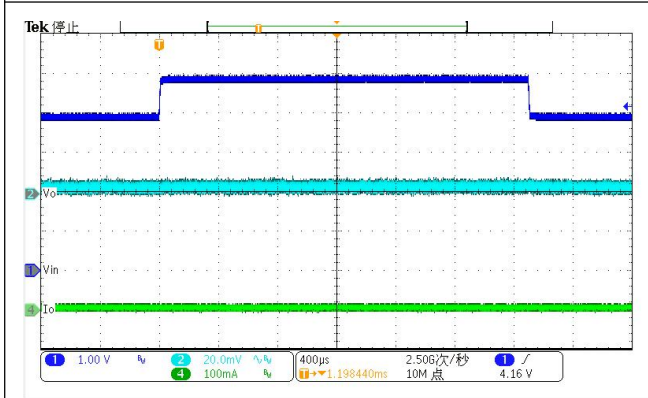


Figure 20: Line Transient ($V_{IN}=3.8V\sim 4.8V$ in $10\mu s$, $I_{OUT}=1mA$)

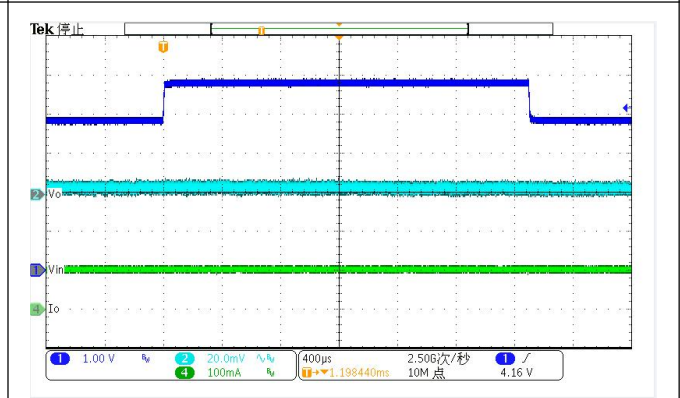


Figure 21: Line Transient ($V_{IN}=3.8V\sim 4.8V$ in $10\mu s$, $I_{OUT}=100mA$)

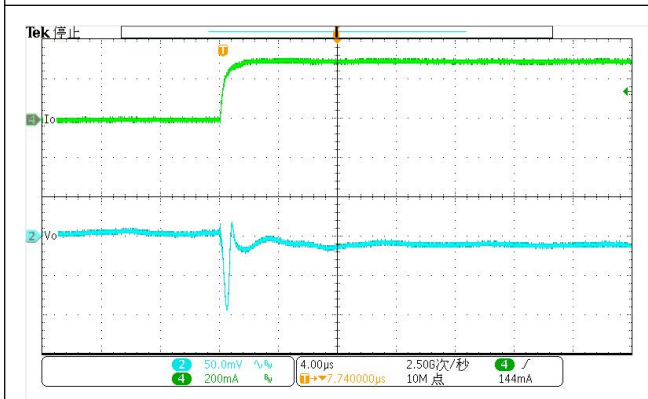


Figure 22: Load Transient ($V_{IN}=3.8V$, $I_{OUT}=1mA$ to $0.3A$ in $1\mu s$)


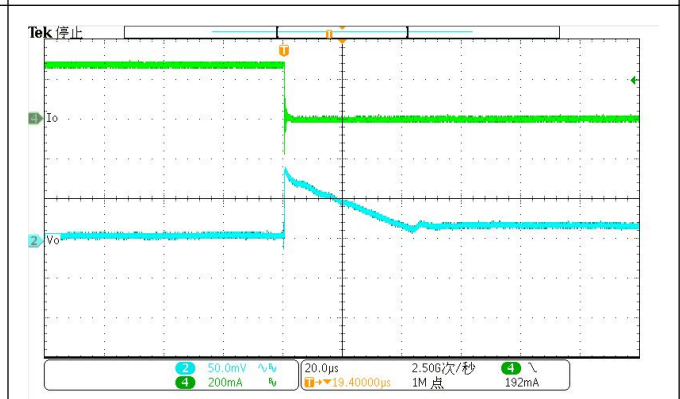


Figure 23: Load Transient ($V_{IN}=3.8V$, $I_{OUT}=0.3A$ to $1mA$ in $1\mu s$)

PACKAGE OUTLINE DIMENSIONS


SOT-23-5L

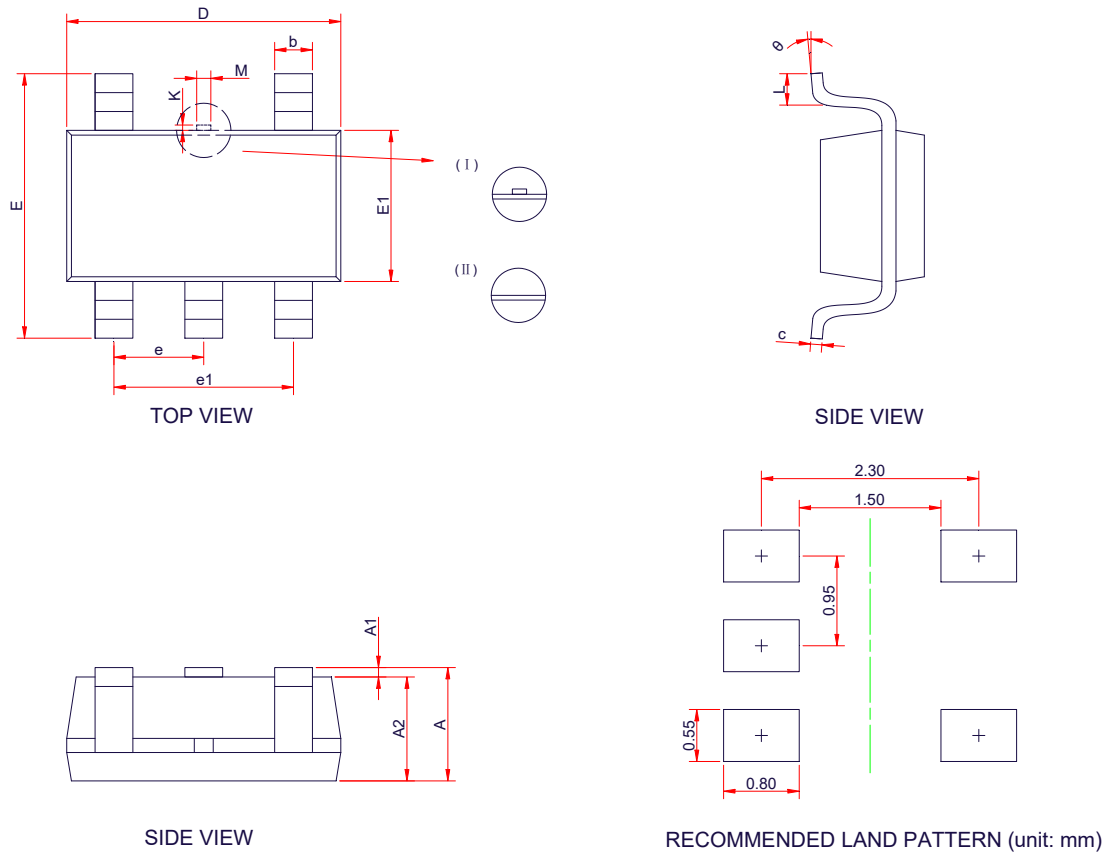


Symbol	Dimensions in Millimeters		
	Min.	Typ.	Max.
A	-	-	1.25
A1	0.00	-	0.15
A2	1.00	1.10	1.20
b	0.30	0.40	0.50
c	0.10	-	0.21
D	2.72	2.92	3.12
E	2.60	2.80	3.00
E1	1.40	1.60	1.80
e	0.95 BSC		
e1	1.90 BSC		
L	0.30	0.45	0.60
M	0.10	0.15	0.25
K	0.00	-	0.25
θ	0°	-	8°

TAPE AND REEL INFORMATION


Reel Dimensions

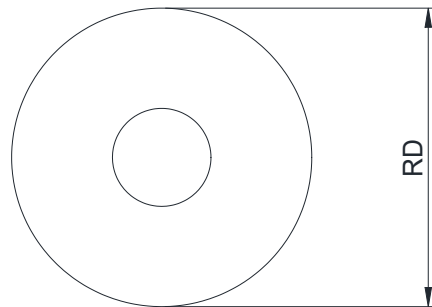

Tape Dimensions

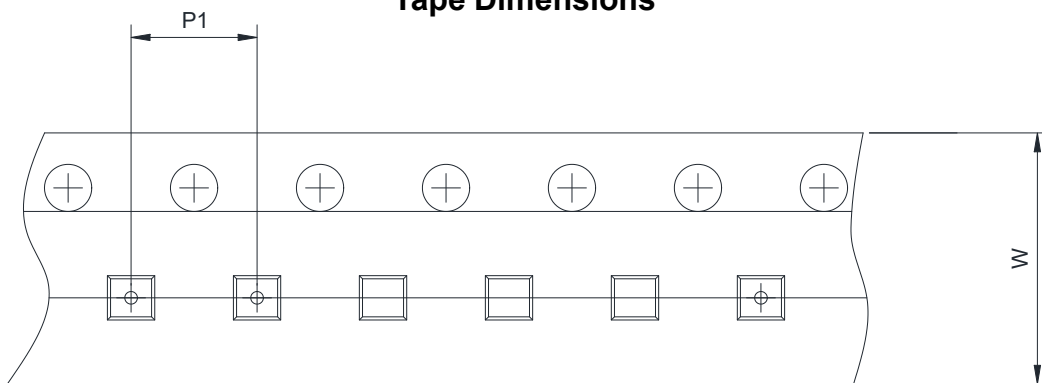

Quadrant Assignments For PIN1 Orientation In Tape

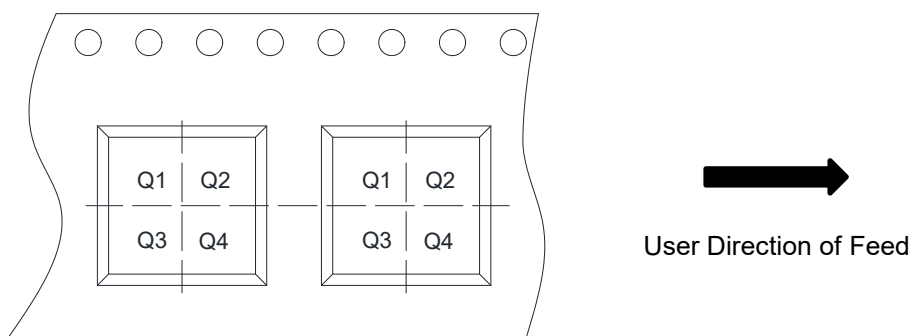

ORDER INFORMATION

RD	Reel Dimension	<input checked="" type="checkbox"/> 7inch	<input type="checkbox"/> 13inch
W	Overall width of the carrier tape	<input checked="" type="checkbox"/> 8mm	<input type="checkbox"/> 12mm <input type="checkbox"/> 16mm
P1	Pitch between successive cavity centers	<input type="checkbox"/> 2mm	<input checked="" type="checkbox"/> 4mm <input type="checkbox"/> 8mm
Pin1	Pin1 Quadrant	<input type="checkbox"/> Q1	<input type="checkbox"/> Q2 <input checked="" type="checkbox"/> Q3 <input type="checkbox"/> Q4

ORDER INFORMATION

Ordering No.	Vout (V)	Package	Operating Temperature	Marking	Shipping
WL2848E12-5/TR	1.2	SOT-23-5L	-40~+85°C	2848 LEYW	Tape and Reel, 3000
WL2848E13-5/TR	1.3	SOT-23-5L	-40~+85°C	2848 LFYW	Tape and Reel, 3000
WL2848E15-5/TR	1.5	SOT-23-5L	-40~+85°C	2848 LGYW	Tape and Reel, 3000
WL2848E18-5/TR	1.8	SOT-23-5L	-40~+85°C	2848 LHYW	Tape and Reel, 3000
WL2848E25-5/TR	2.5	SOT-23-5L	-40~+85°C	2848 LEYW	Tape and Reel, 3000
WL2848E27-5/TR	2.7	SOT-23-5L	-40~+85°C	2848 LYYW	Tape and Reel, 3000
WL2848E28-5/TR	2.8	SOT-23-5L	-40~+85°C	2848 LLYW	Tape and Reel, 3000
WL2848E29-5/TR	2.9	SOT-23-5L	-40~+85°C	2848 LgYW	Tape and Reel, 3000
WL2848E30-5/TR	3.0	SOT-23-5L	-40~+85°C	2848 LMYW	Tape and Reel, 3000
WL2848E33-5/TR	3.3	SOT-23-5L	-40~+85°C	2848 LNYW	Tape and Reel, 3000