
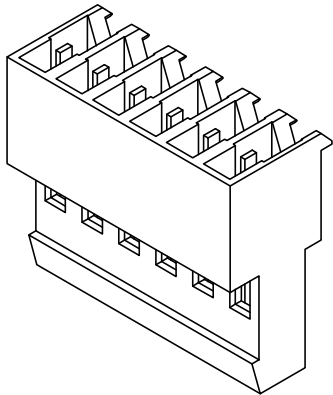


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.27	阿树

2.54 [0.100]±0.10

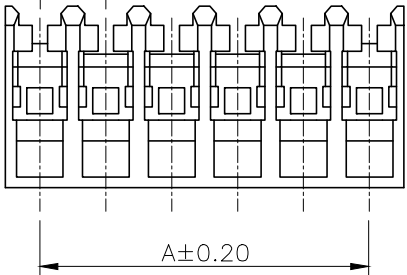



■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:2A AC/DC
- Withstanding Voltage:1500V AC/minute
- Temperature range:−40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ


PART NO.:

X9254 H IR-XX-N0
① ② ③ ④ ⑤

- ①Series No
②Category:H-HSG
③Welding Board Angle:Angle: I-HSG+Hardware
R-Right Angle 90°
④Row No.Pin No:XX-02~30P
⑤Material:N0-PA66 UL94V-0

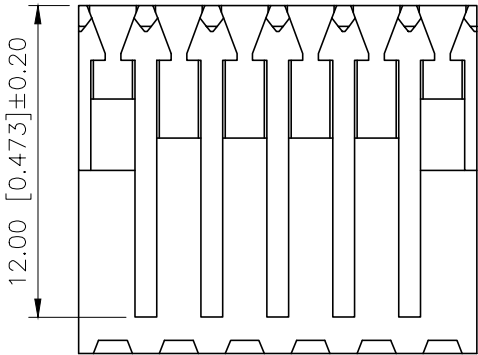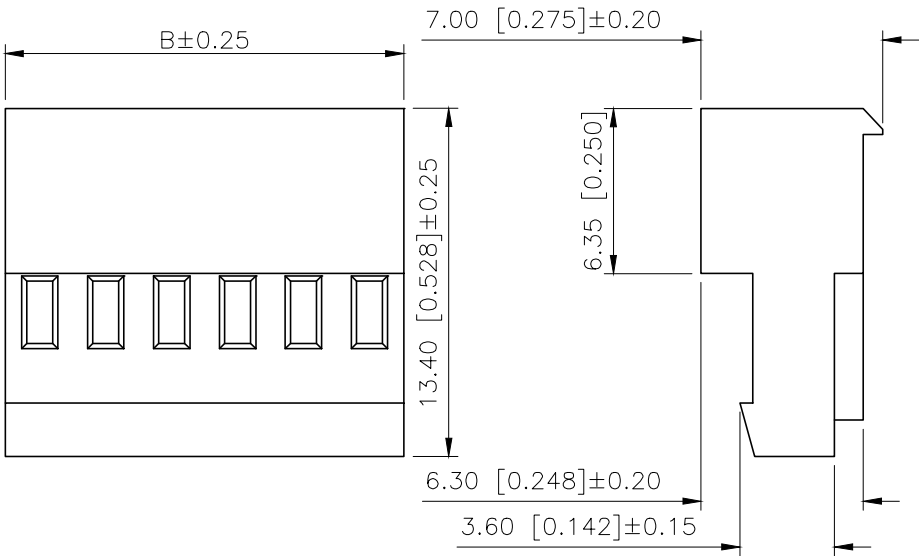

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.54	5.20	12	27.94	30.60
03	5.08	7.74	13	30.48	33.14
04	7.62	10.28	14	33.02	35.68
05	10.16	12.82	15	35.56	38.22
06	12.70	15.36	16	38.10	40.76
07	15.24	17.90	17	40.64	43.30
08	17.78	20.44	18	43.18	45.84
09	20.32	22.98	19	45.72	48.38
10	22.86	25.52	20	48.26	50.92
11	25.40	28.06			

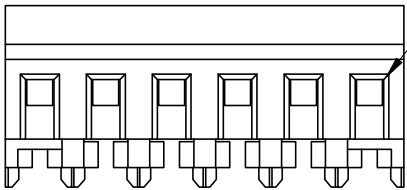

Circuit 1

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



X9254HIR-XX-N0	Nylon 66 UL 94V-0	Brass	Tin-Plated	X9254W
PART NO	Material	Material(Pin)	Finish(Terminal)	Wire Range
DESIGN	阿树	VIEW:	MODEL TYPE: 2.54mm IDC Style Connectors	
CHECKED		UNIT: mm/in	PART NO.: X9254HIR-XX-N0	
APPROVED		SIZE: A4	DWG NO.:	