


Chip Resistor Arrays CRB2A4E (Concave), CRC11A2E (Convex) Series

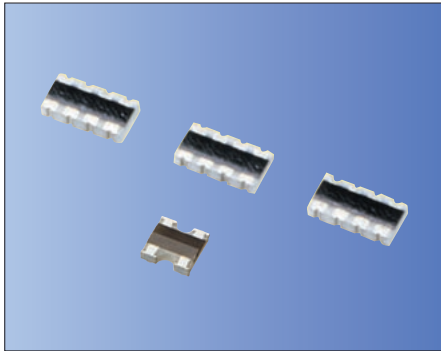

RoHS Compliant

Miniature chip resistor arrays have 4 and 2 resistor elements integrated as a single component.

Features

- Miniature (2.0×1.0mm) Resistor Arrays
Max. 60% space saving compared with the use of standard chip array (3.2×1.6mm)
- 0.5mm Termination pitch (Same as IC lead-pin pitch)
Easy designing of pattern layout and improve electrical characteristics for circuit

* Please consult combination of different resistance type

How to Order

CRB2A 4E 103 J H
① ② ③ ④ ⑤

- ① Series (CRB2A: 2.0×1.0mm, concave termination, 4 elements)
(CRC11A: 1.0×1.0mm, convex termination, 2 elements)
- ② Number of elements (4E: 4 elements)
(2E: 2 elements)
- ③ Resistance Value (3 digits numbering)
472 = 4.7kΩ, 103 = 10kΩ
000 = 0Ω (Chip Jumper Array)
- ④ Tolerance
- ⑤ Packaging

J	±5%	Blank	Chip Jumper Array
---	-----	-------	-------------------


• 2mm pitch taping

Code	Form	Material	Packing unit
H	Taping	Paper	10000 pcs./ reel

- 4 element chip Resistors Array ————— CRB2A4E series (Concave Termination)
- 2 element chip Resistors Array ————— CRC11A2E series (Convex Termination)

Dimensions


(Unit: mm)

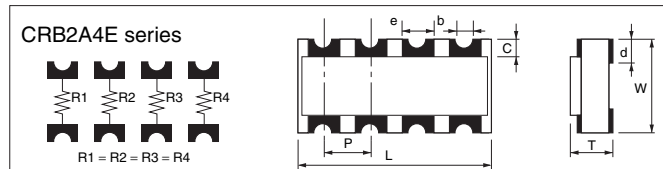

Code	L	W	T	P	b
Dimensions	2.0 ^{+0.10} / _{-0.10}	1.0 ^{+0.10} / _{-0.10}	0.4 ^{+0.10} / _{-0.10}	0.5 typ.	φ0.15 typ.
Code	c	d	e		
Dimensions	0.2 ^{+0.15} / _{-0.15}	0.25 ^{+0.15} / _{-0.15}	0.25 typ.		

• No marking on chips.

(Unit: mm)

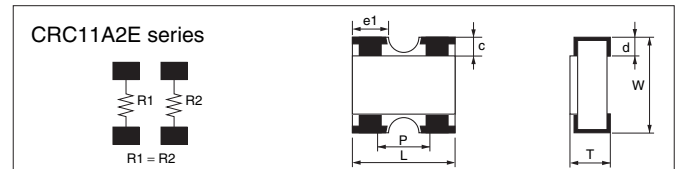

Code	L	W	T	P
Dimensions	1.00 ^{+0.10} / _{-0.10}	1.00 ^{+0.10} / _{-0.10}	0.35 ^{+0.05} / _{-0.05}	0.65 typ.
Code	c	d	e1	
Dimensions	0.20 ^{+0.15} / _{-0.15}	0.20 ^{+0.15} / _{-0.15}	0.33 ^{+0.10} / _{-0.10}	

• No marking on chips.

Rating


Chip resistor arrays		Chip jumper array	
Item	Rating	Item	Rating
Rated power (70°C)	1/ 32W/ element	Rated current	1A
Max. working * voltage	25V		
Max. Over-load voltage	50V		
Resistance value	10Ω to 1MΩ	Conductive resistance value	50mΩ max.
Tolerance	J: ±5%		
Working Temperature	-55 to +125°C		
Number of elements	4E: 4 elements, 2E: 2 elements		

* Rated Voltage: $\sqrt{\text{Rated power} \times \text{Resistance value}}$, whichever is less.

* Standard Resistance Value: E-6 Series

* Please contact sales engineer for any other requirements of the nominal resistance value and the tolerance.

8 element chip Resistor Array/ CRB6A8E Series (Concave Termination)

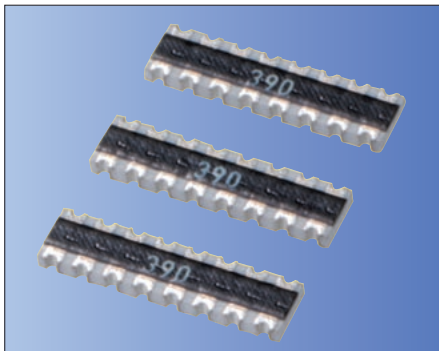

RoHS Compliant

Features

- Equal length conductors can be traced out from 0.8mm pitch termination

How to Order

CRB6A 8E 390 G U
① ② ③ ④ ⑤

- ① Series CRB6A
- ② Number of elements
8E = 8 elements
- ③ Resistance value
3 digits numbering
- ④ Tolerance

G	±2%	J	±5%
---	-----	---	-----

- ⑤ Packaging

U	Taping plastic 4,000 pcs./ reel
---	---------------------------------

Rating

Chip Resistor Arrays	
Item	Rating
Rated power (70°C)	1/ 16W/ element
Max. working voltage*	50V
Max. over-load voltage	100V
Resistance value	10Ω to 1MΩ
Tolerance	G: ±2%, J: ±5%
Working temperature	-55 to +125°C
Number of elements	8E: 8 elements


* Rated Voltage: $\sqrt{\text{Rated power} \times \text{Resistance value}}$, whichever is less.

* Standard Resistance Value: E-6 Series

* Please contact sales engineer for any other requirements of the nominal resistance value and the tolerance.


Dimensions

(Unit: mm)

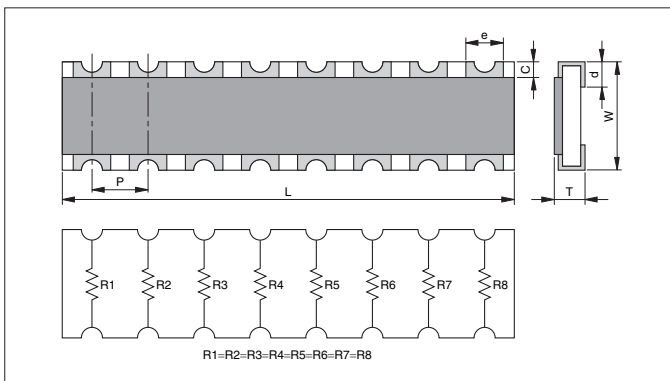

Code	Dimensions
L	6.4±0.2
W	1.6±0.2
T	0.6±0.1
P	0.8 typ.
c	0.3±0.2
d	0.4±0.15
e (Top side)	0.5±0.1
e (Bottom side)	0.4±0.15

Chip Resistor Network/ RNA4A Series (Concave Termination)

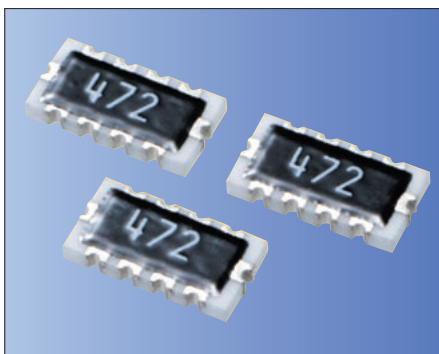

RoHS Compliant

Features

- Reduction in mounting costs & Process
- Save PCB space
- Eight resistors in one SMD package
- Reduction of inventory control costs

Applications

- Lap Top Computer
- Notebook Computer
- Printer
- Hard Disk Drive
- CD ROM
- Facsimile

How to Order

RNA4A 8E 103 J U
① ② ③ ④ ⑤

- ① Series
- ② Number of elements (8E: 8 elements)
- ③ Resistance code (3 digits)
- ④ Resistance tolerance (J: ±5%)
- ⑤ Packaging


U	Plastic Taping, 4,000 pcs./ reel
---	----------------------------------

* Taping Qty.: 4000 pcs./ 7 inch reel (4mm pitch)


Carrier Tape: plastic

Dimensions

(Unit: mm)

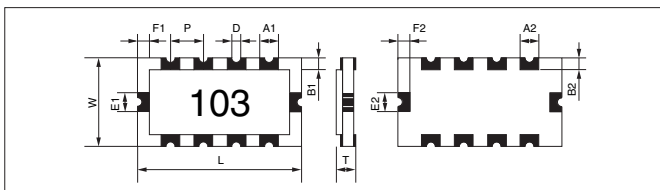

Circuit Diagram

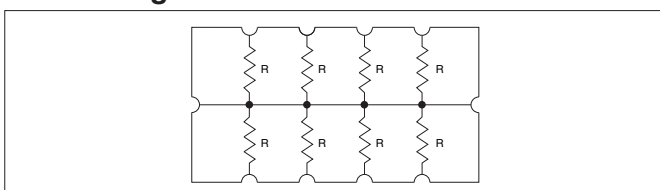

• Nominal resistance value is all the same.

Code	Dimensions
L	4.0±0.15
W	2.1±0.15
T	0.6±0.1
A1	0.5±0.1
B1	0.25±0.15
E1	0.5±0.1
F1	0.3±0.15
D	0.3 typ.
P	0.8 typ.
A2	0.4±0.1
B2	0.4±0.15
E2	0.5±0.1
F2	0.35±0.15

Specifications


Item	Rating
Rated power (70°C)	1/ 16W (0.0625W)/ Element
Max. working voltage*	25V
Max. over-load voltage	50V
Resistance value	100Ω to 220KΩ
Tolerance	J: ±5%
Number of elements	8E: 8 elements
Working temperature	-55 to +125°C

* Rated Voltage: $\sqrt{\text{Rated power} \times \text{Resistance value}}$, whichever is less.


* Standard Resistance Value: E-6 Series

* If resistance value under 100Ω is needed, please contact sales.

Electrical Characteristics

Item		Standard		Test Conditions									
		Resistor	Jumper	Resistor	Jumper								
DC Resistance		Within Initial Tolerance	50mΩ max.	Power Contdition A (20°C, 65%RH)									
Temperature Characteristics		<table><tr><th>Resistance (Ω)</th><th>TCR (ppm/ °C)</th></tr><tr><td>R <10</td><td>-100 to +600</td></tr><tr><td>10≤ R ≤1M</td><td>-250 to +250</td></tr><tr><td>1M< R</td><td>-500 to +300</td></tr></table>	Resistance (Ω)	TCR (ppm/ °C)	R <10	-100 to +600	10≤ R ≤1M	-250 to +250	1M< R	-500 to +300		Test Temperature: 25,125 (°C) ΔR/ R=R ₂ -R ₁ / R ₁ ×1/ T ₂ -T ₁ ×10 ⁶ ΔR/ R: Temp. Coefficient (ppm/ °C) T ₁ : 25 (°C) T ₂ : 125 (°C) R ₁ : T ₁ Resistance at (Ω) R ₂ : T ₂ Resistance at (Ω)	
		Resistance (Ω)	TCR (ppm/ °C)										
R <10	-100 to +600												
10≤ R ≤1M	-250 to +250												
1M< R	-500 to +300												
Short-time Overload	ΔR/ R	± (2.0%+0.10Ω) max. of the initial value	50mΩ max.	(1) Apply 2.5×rated voltage for 5 sec. (2) Wait 30 minutes (3) Measure resistance	(1) 2A for 5 sec. (2) Wait 30 minutes (3) Measure resistance								
	Visual	No evidence of mechanical damage intermittent overload											
Intermittent Overload	ΔR/ R	± (5%+0.1Ω) max. of the initial value	50mΩ max.	(1) Perform 10000 voltage cycles as follows: ON (2.5×rated voltage) 1 sec. OFF 25 sec. (2) Stabilization time 30 min. without loading (3) Measure resistance	(1) Perform 10000 current cycles as follows: ON (2A) 1 sec. OFF 25 sec. (2) Wait 30 minutes (3) Measure resistance								
	Visual	No evidence of mechanical damage											
Dielectric Withstanding Voltage		No evidence of mechanical damage		Apply 300VAC for 1 sec. 									
Insulation Resistance		10 ⁸ Ω min.		Apply 100V DC. 									

Mechanical Characteristics

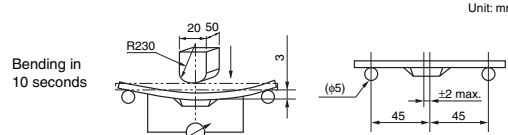Item		Standard		Test Conditions	
		Resistor	Jumper	Resistor	Jumper
Terminal Strength	$\Delta R/ R$	$\pm (1\%+0.05\Omega)$ max. of the initial value	50m Ω max.	Apply the load as show: Measure resistance during load application  PC board: Glass epoxy t=1.6	
	Visual	No evidence of mechanical damage after loading			
Soldering Heat Resistance	$\Delta R/ R$	$\pm (1\%+0.05\Omega)$ max. of the initial value	50m Ω max.	Immerse into molten solder at 260$\pm$5°C for 10$\pm$1 sec. Stabilize component at room temperature for 1hr. Measure resistance.	
	Visual	No evidence of leaching			
Solderability		Coverage $\geq$ 95% each termination end		Immerse in Rogin Flux for 2$\pm$0.5 sec. and in SN62 solder at 235$\pm$5°C for 2$\pm$0.5 sec.	
Anti-Vibration Test	$\Delta R/ R$	$\pm (1\%+0.1\Omega)$ max. of the initial value	50m Ω max.	2 hrs. each in X, Y and Z axis. (TTL 6hrs.) 10 to 55 Hz sweep in 1 min. at 1.5mm amplitude.	
	Visual	No evidence of mechanical damage			
Solvent Resistance	$\Delta R/ R$	$\pm (0.5\%+0.05\Omega)$ max. of the initial value	50m Ω max.	Immerse in static state butyl acetate at 20°C to 25°C for 30$\pm$5 sec. Stabilize component at room temperature for 30 min. then measure value.	
	Visual	No evidence of mechanical damage			


Environmental Characteristics

Item		Standard		Test Conditions	
		Resistor	Jumper	Resistor	Jumper
Temperature Cycle	ΔR/ R	± (1%+0.05Ω) max. of the initial value	50mΩ max.	1) Run 5 cycles as follows: –55±3°C for 30 min. 125±3°C for 30 min. Room temp. for 10 to 15 min. 2) Stabilize component at room temperature for 1hr. then measure value.	
	Visual	No evidence of mechanical damage			
Low Temperature Storage	ΔR/ R	± (2%+0.1Ω) max. of the initial value	50mΩ max.	1) Dwell in –55°C chamber without loading for 1000 ⁺⁴⁸ ₋₀ hrs. 2) Stabilize component at room temperature for 1hr. then measure value.	
	Visual	No evidence of mechanical damage			
High Temperature Storage	ΔR/ R	± (3%+0.1Ω) max. of the initial value	50mΩ max.	1) Dwell in 125°C chamber without loading for 1000 ⁺⁴⁸ ₋₀ hrs. 2) Stabilize component at room temperature for 1hr. then measure value.	
	Visual	No evidence of mechanical damage			
Moisture Resistance	ΔR/ R	± (3%+0.1Ω) max. of the initial value	50mΩ max.	1) Dwell in temp.: 65°C RH90 to 95%RH chamber without loading for 1000 ⁺⁴⁸ ₋₀ hrs. 2) Stabilize component at room temperature for 1hr. then measure value.	
	Visual	No evidence of mechanical damage			
Life Test	ΔR/ R	± (3%+0.1Ω) max. of the initial value	50mΩ max.	1) Temp.: 70±3°C Voltage: (rated voltage) on 90 min. off 30 min. Duration: 1000 ⁺⁴⁸ ₋₀ hrs. 2) Stabilize component at room temperature for 1hr. then measure value.	
	Visual	No evidence of mechanical damage			
Loading Life in Moisture	ΔR/ R	± (3%+0.1Ω) max. of the initial value	50mΩ max.	1) Temp.: 40±2°C RH: 90 to 95% Voltage Cycle: on 90 min. (rated voltage) off 30 min. Duration: 1000 ⁺⁴⁸ ₋₀ hrs. 2) Stabilize component at room temperature for 1hr. then measure value.	
	Visual	No evidence of mechanical damage			

Tape & Reel

• Reel


(Unit: mm)

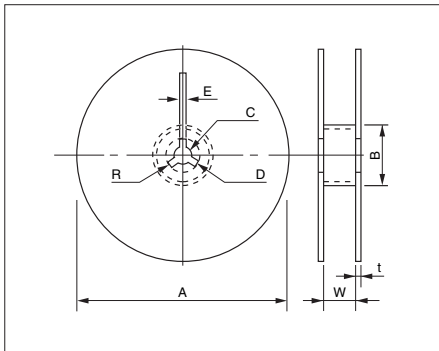

Code	A	B	C	D	E	W	t	R
Width: 8mm	$\phi 178 \pm 2.0$	$\phi 50 \text{ min.}$	$\phi 13.0 \pm 0.5$	$\phi 21.0 \pm 0.8$	2.0 ± 0.5	10.0 ± 1.5	2.5 max.	1.0
Width: 12mm						13.0 ± 1.5		

• Carrier Tape (8mm)


(Unit: mm)

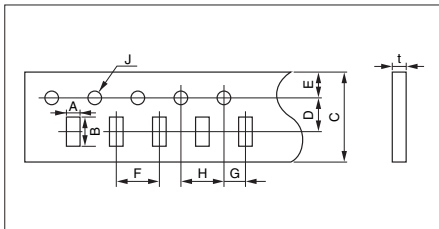

Dimension Code		A	B	C	D	E	F	G	H	J	t
TYPE											
0404	1.2±0.1	1.2±0.1	8.0±0.2	3.5±0.05	1.75±0.1	2.0±0.1	2.0±0.05	4.0±0.1	φ1.5 ^{+0.1} ₀	0.6 max.	
0804	1.25±0.2	2.25±0.2				4.0±0.1				1.1 max.	
0805	1.65±0.2	2.4±0.2									
1206	2.0±0.2	3.6±0.2									

• Carrier Tape (12mm)

(Unit: mm)

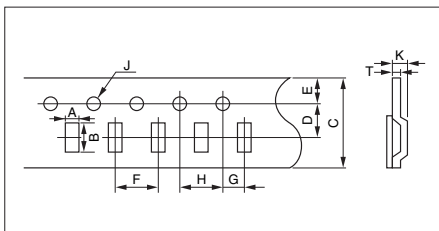

TYPE	Dimension Code	A	B	C	D	E	F	G	H	J	T	K
1020		2.9 ± 0.2	5.3 ± 0.2	12.0 ± 0.3	5.5 ± 0.05	1.75 ± 0.1	4.0 ± 0.1	2.0 ± 0.1	4.0 ± 0.1	$\phi 1.5 \begin{smallmatrix} +0.1 \\ -0 \end{smallmatrix}$	0.6 max.	1.4 max.
1608		2.5 ± 0.2	4.4 ± 0.2									
2512		3.5 ± 0.2	6.7 ± 0.2									
2506		2.0 ± 0.2	6.9 ± 0.2									

• Taping Quantity per reel


(Unit: pcs.)

TYPE	Series	$\phi 178$ reel
0404	CRC11A2E, ATC1A	10000 (2mm pitch)
0804	CRB2A4E	10000 (2mm pitch)
0805	LR21	5000 (4mm pitch)
1206	LR32	5000 (4mm pitch)
1020	LR50	4000 (4mm pitch)
1608	RNA4A	4000 (4mm pitch)
2512	LR63	4000 (4mm pitch)
2506	CRB6A8E	4000 (4mm pitch)

Recommended Land Patterns

Chip Type


(Unit: mm)

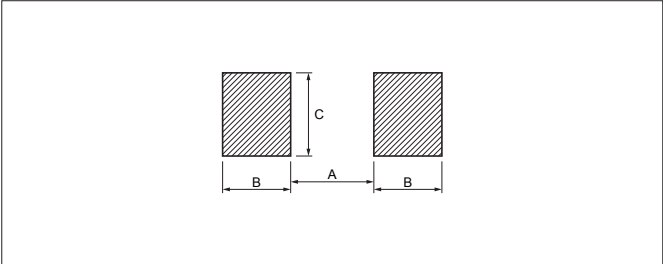

EIA Size	A	B	C
0805	1.0	0.8	1.2
1020	1.4	1.0	5.0
1206	2.2	0.9	1.5
2512	5.0	1.0	3.0


Array Type

(Unit: mm)

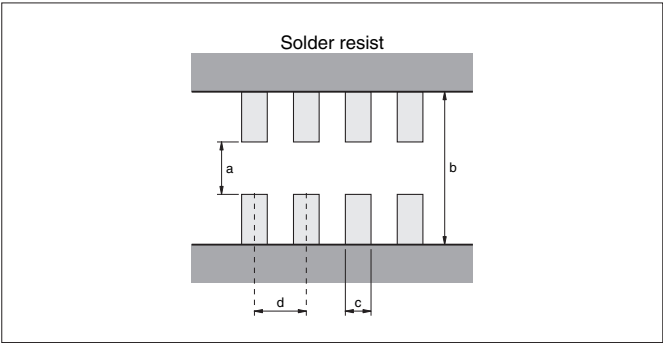

Series	a	b	c	d
CRB2A4E	0.4	1.5	0.25	0.5
CRC11A2E	0.5	1.5	0.4	0.65
CRB6A8E	0.7	2.3	0.4	0.8
ATC1A	0.5	1.5	0.4	0.65

(Unit: mm)

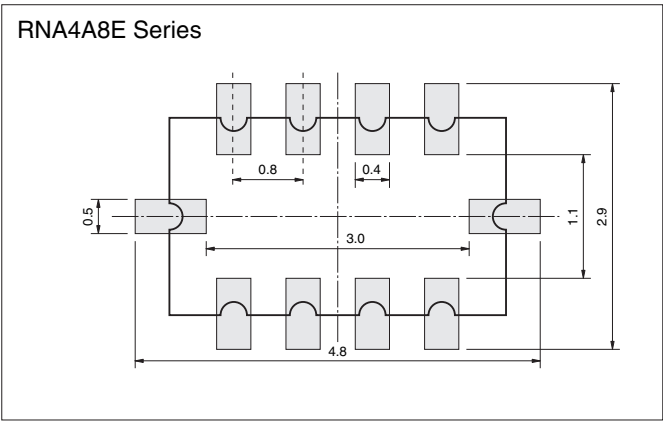

Circuit design

- 1) Once application and assembly environments have been checked, the resistors may be used in conformance with the catalog and the specifications.
- 2) Please consult the manufacturer in advance when the resistors is used in devices such as: devices which deal with human life, i.e. medical devices; devices which are highly public orientated; and devices which demand a high standard of liability.
- 3) Please use the resistors in conformance with the operating temperature provided in both the catalog and the specifications.
- 4) Please keep voltage under the rated voltage which is applied to the resistor.
- 5) Do not use the resistor in an environment where it might easily exceed the respective provisions concerning shock and vibration specified in the catalog and specifications.
- 6) Please do not use the resistor in the following environments.
 - ① State that water, oil, and solvent hang in resistor
 - ② State where poisonous gas (sulfur and chlorine, etc.) exists
 - ③ State that direct sunshine, radiation, and ultraviolet, etc. are irradiated
- 7) There is a thing that resistance changes according to the stuff of the resin when the coating with the resin is given.
Please use resin coating after confirming the characteristic.
- 8) There is a thing that resistance changes according to flux and cleaner.
Please use flux and cleaner after confirming the characteristic.
- 9) Please consult about a lead free products.

Storage

- 1) Keep storage place temperature +5 to +35°C, humidity 45 to 75% RH.
- 2) Please keep parts out of poisonous gas such as sulfur or chlorine in the air and out of salty moisture, or they may cause rust of terminal and poor solderability. Please consider the above-mentioned item after mounting.


3) Soldering iron

Temperature	soldering iron 300±5°C *
Time	3 sec. max. *


*Do not place the soldering iron on the chip. Soldering iron is 30W max.

Soldering method


1) Recommendable temperature profile

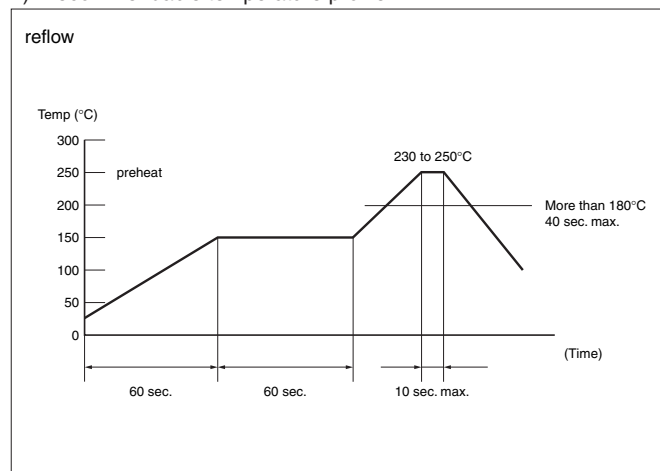

2) Recommendable temperature profile

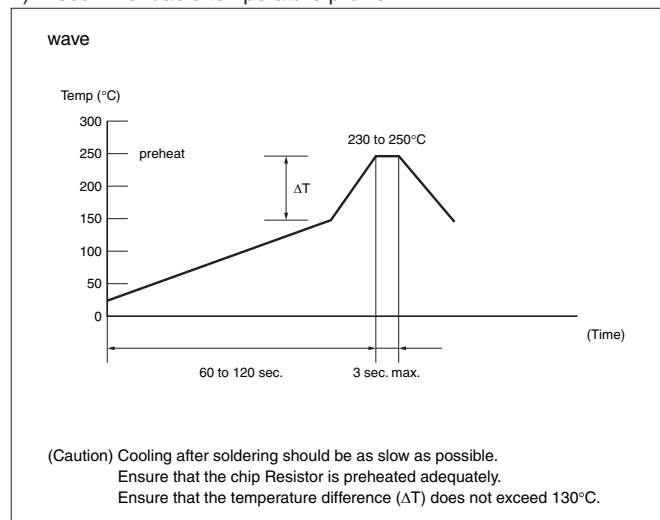

3) Pb-free recommendable temperature profile

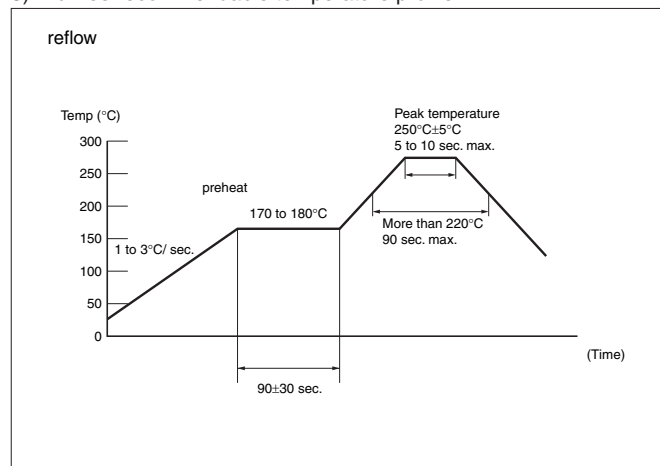

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

<u>CRB2A4E510JT</u>	<u>CRB2A4E222JT</u>	<u>CRB2A4E3R0JT</u>	<u>CRB2A4E330JT</u>	<u>CRC2A4E620JT</u>	<u>CRC2A4E223JT</u>
<u>RNA4A8E103JT</u>	<u>CRB2A4E124JT</u>	<u>CRB2A4E202JT</u>	<u>CRB2A4E272JT</u>	<u>CRC3A4E24R9FT</u>	<u>CRC3A4E221JT</u>
<u>CRB2A4E121JT</u>	<u>CRC3A4E103JT</u>	<u>CRB2A4E470JT</u>	<u>CRB2A4E822JT</u>	<u>RNA4A8E102JT</u>	<u>CRC3A4E100JT</u>
<u>RNA4A8E272JT</u>	<u>CRC2A4E390JT</u>	<u>RNA4A8E271JT</u>	<u>CRB2A4E7R5JT</u>	<u>CRB2A4E473JT</u>	<u>CRB2A4E150JT</u>
<u>CRB2A4E203JT</u>	<u>CRB2A4E101JT</u>	<u>CRC4A8E100JT</u>	<u>CRB2A4E331JT</u>	<u>CRC4A8E103JT</u>	<u>CRB6A8E103JU</u>
<u>CRB2A4E472JT</u>	<u>RNA4A8E472JT</u>	<u>CRB2A4E751JT</u>	<u>CRB2A4E5R1JT</u>	<u>RNA4A8E823JT</u>	<u>CRB2A4E104JT</u>
<u>CRC2A4E330JT</u>	<u>CRB3A4E331JT</u>	<u>CRB2A4E100JT</u>	<u>CRC2A4E474JT</u>	<u>CRB2A4E151JT</u>	<u>CRB3A4E330JT</u>
<u>CRB2A4E102JT</u>	<u>CRB2A4E511JT</u>	<u>RNA4A8E510JT</u>	<u>CRB2A4E684JT</u>	<u>CRB2A4E103JT</u>	<u>CRB2A4E560JT</u>
<u>CRC2A4E510JT</u>	<u>CRC4A8E220JT</u>	<u>CRB2A4E332JT</u>	<u>CRB2A4E201JT</u>	<u>CRB2A4E220JT</u>	<u>CRB2A4E240JT</u>
<u>CRC3A4E220JT</u>	<u>CRB3A4E272JT</u>	<u>CRC4A8E101JT</u>	<u>CRB1A2E100JT</u>	<u>CRB1A2E220JT</u>	<u>CRB2A4E000T</u>
<u>CRB2A4E241JT</u>	<u>CRB2A4E390JT</u>	<u>CRB3A4E470JT</u>	<u>CRC2A4E103JT</u>	<u>CRC2A4E472JT</u>	<u>CRC4A8E270JT</u>
<u>CRC4A8E510JT</u>	<u>CRC2A4E101JT</u>	<u>CRC2A4E100JT</u>	<u>RNA4A8E331JT</u>		