

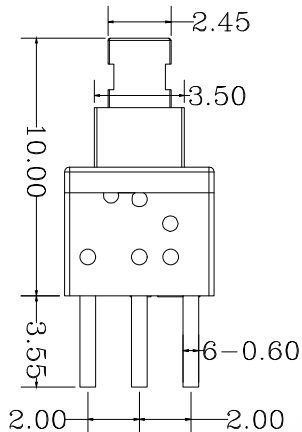






1 SAMZO 2 REAC/ROHS

6		7		8	
REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2018.06.14




技术参数

- 1.额定电流: DC30V 0.1A
- 2.耐高压: 交流250V(50-60赫兹)持续1分钟.
- 3.接触阻抗: 500毫欧max.
- 4.绝缘阻抗: 100兆欧min .500V DC.
- 5.操作力: 180±50gf
- 6.全行程: 2.0mm±0.2mm
- 7.LOCK行程: 1.8mm±0.3mm
- 8.运行类型: 自锁/无锁
- 9.操作寿命: 10.000次.

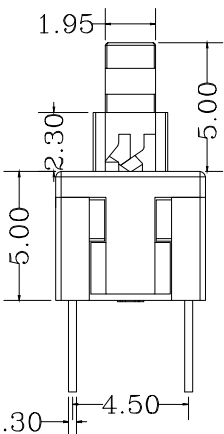

电路图

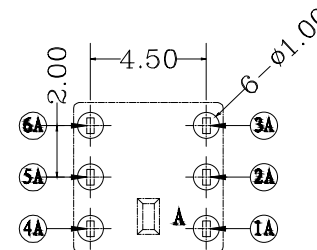

印刷电路板焊接处尺寸图

- A. 系列:20:5.8-6P系列
- B. 贴装方式:1-180° DIP
- C. 主体高度:100:10.0mm
- D. 性能特性:0:自锁/1: 无锁
- E. 使用寿命:1:10,000万次
- F. 模具编码:0-常规
- G. 主体材质:1-LCP/2-NYLON

20 1 100 0 1 0 *

Ⓐ Ⓑ Ⓒ Ⓓ Ⓔ Ⓕ

A	ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR	FIRST VIEW			The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM	TITLE::	
	6	导芯	LCP	1	黑色	GENERAL TOLERANCE				5.8*5.8-6PIN长导按键	
	5	盖子	NYLON	1	黑色	SCALE	1:1	UNIT		mm	DWG NO: 201100-P001
	4	弹片	铜合金	1	素材	≥0~2<	±0.15	SAMZO COMPONENTS		PART NO: 201100150300	
	3	触点	银合金	1	素材	DESIGN	WANGGUIFA	2018.06.12		Electronic switch and connector manufacturer	MODEL NO: 201100010-*
	2	底座	LCP	1	黑色	CHECKED	ZHENGUILAN	2018.06.12		NAME:	PUSH SWITCH
1	端子	黄铜	2	镀银	APPROVED	LILIANJIANG	2018.06.14				