


3M™ ROUND CONDUCTOR FLAT CABLE, 3756 SERIES
 .025" 30 AWG STRANDED, TPE

- NOTES
- REGULATORY INFORMATION: FOR REGULATORY INFORMATION ABOUT THIS PRODUCT, VISIT 3m.com/regs OR CONTACT YOUR 3M REPRESENTATIVE.
 UL FILE NO: E42769.
 STYLE NO: 20297
 - .025 INCH WIRE SPACING INCREASES SIGNAL DENSITY
 - TPE INSULATION PROVIDES EXCELLENT TRANSMISSION PROPERTIES.
 - 30 AWG STRANDED CONDUCTORS ON .025 INCH WIRE SPACING IS DESIGNED FOR MASS TERMINATION AND FLEXIBILITY.
 - MEETS THE SCSI-3 CHARACTERISTIC IMPEDANCE REQUIREMENTS.
 - BLUE MARKING ON ONE EDGE OF CABLE DESIGNATES WIRE #1.

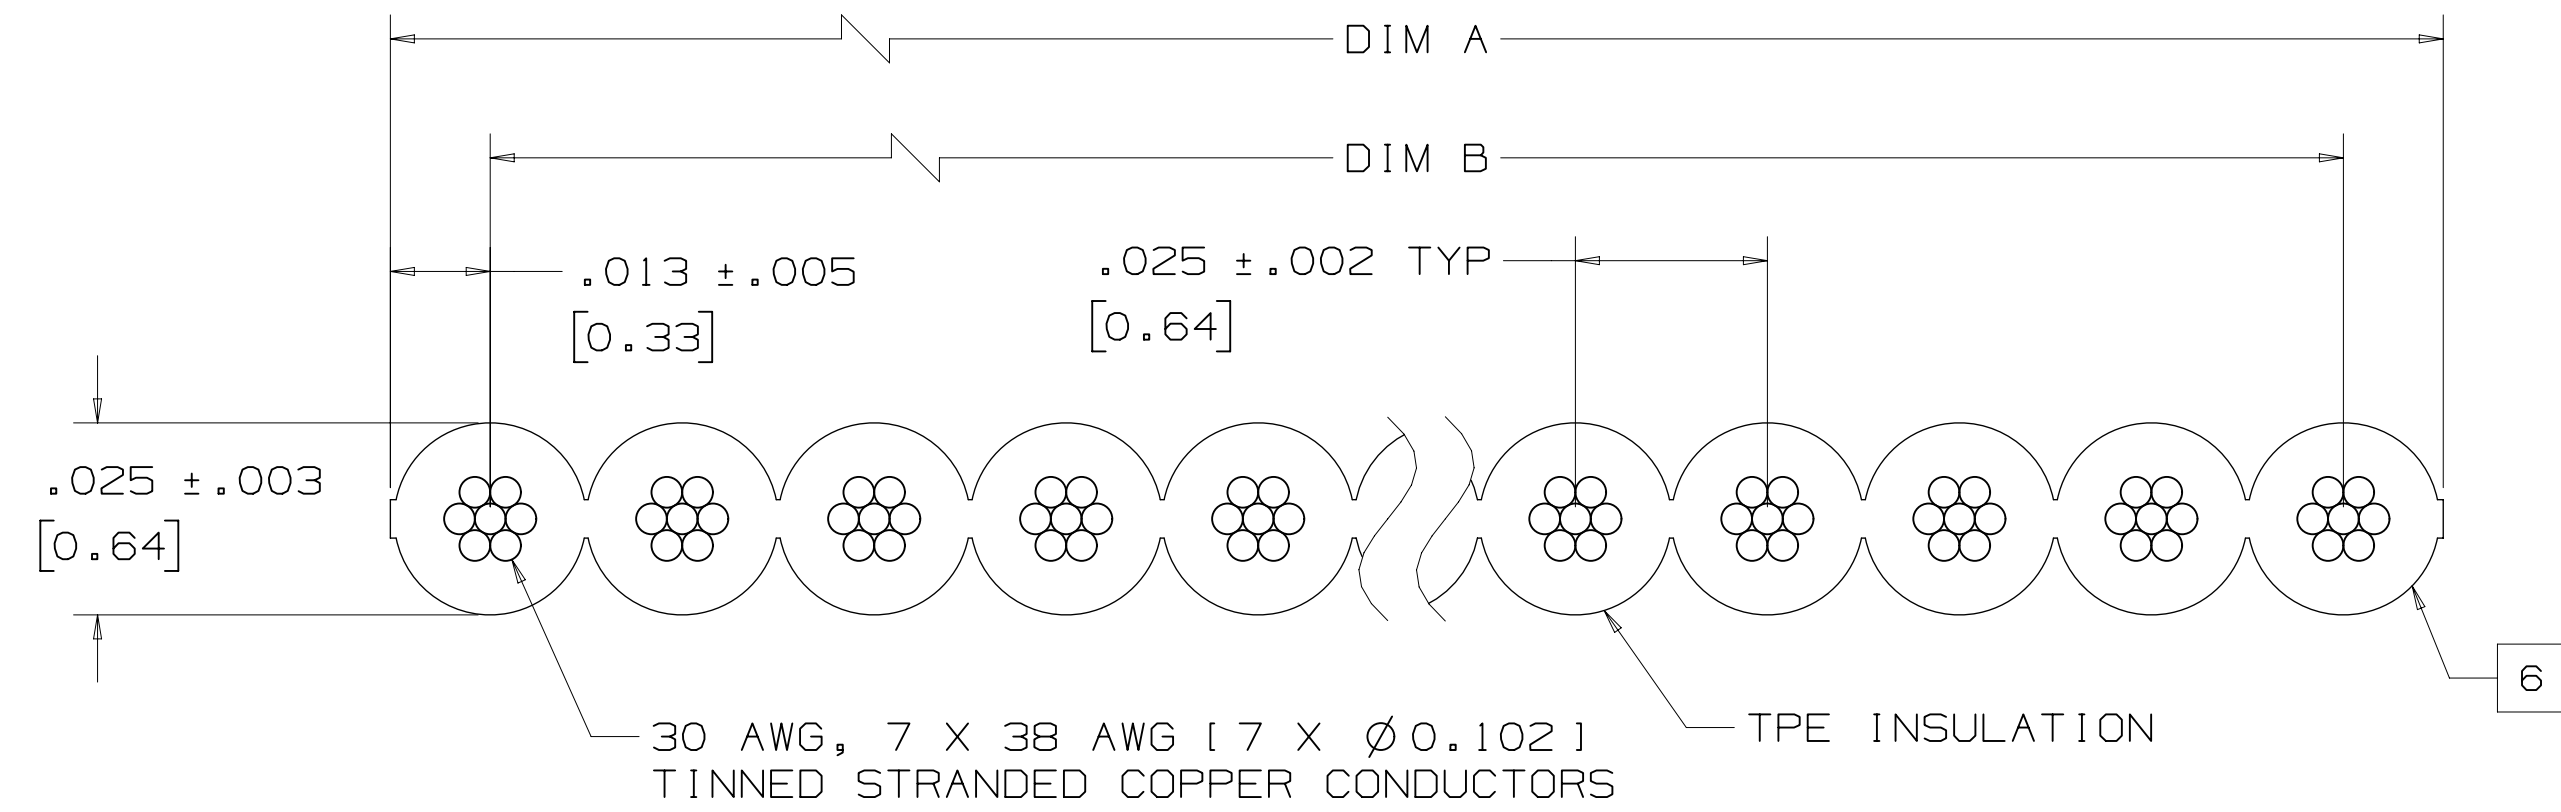

ORDERING INFORMATION

3756/XX XX

BLANK = STANDARD
 C = CANADIAN CERTIFIED VERSION

BLANK = STANDARD
 SF = SPLICE FREE

NUMBER OF CONDUCTORS (SEE TABLE)

NOTE:
 AVAILABLE IN STANDARD 100 FT OR 300 FT ROLLS. PLEASE SPECIFY WHEN ORDERING. CONTACT 3M FOR AVAILABILITY OF ADDITIONAL CONDUCTOR COUNTS AND/OR CUSTOM ROLL LENGTHS.

TABLE 1			
NUMBER OF CONDUCTORS	3M PART NUMBER	DIMENSION A	DIMENSION B
10	3756/10	0.250±.006 [6.35]	0.225±.004 [5.72]
12	3756/12	0.300±.006 [7.62]	0.275±.004 [6.99]
14	3756/14	0.350±.006 [8.89]	0.325±.004 [8.26]
16	3756/16	0.400±.006 [10.16]	0.375±.004 [9.53]
20	3756/20	0.500±.006 [12.70]	0.475±.004 [12.07]
26	3756/26	0.650±.006 [16.51]	0.625±.004 [15.88]
30	3756/30	0.750±.009 [19.05]	0.725±.006 [18.42]
34	3756/34	0.850±.009 [21.59]	0.825±.006 [20.96]
36	3756/36	0.900±.009 [22.86]	0.875±.006 [22.23]
40	3756/40	1.000±.009 [25.40]	0.975±.006 [24.77]
50	3756/50	1.250±.009 [31.75]	1.225±.006 [31.12]
60	3756/60	1.500±.012 [38.10]	1.475±.009 [37.47]
68	3756/68	1.700±.012 [43.18]	1.675±.009 [42.55]
80	3756/80	2.000±.015 [50.80]	1.975±.011 [50.17]
100	3756/100	2.500±.015 [63.50]	2.475±.012 [62.87]

PHYSICAL :

INSULATION MATERIAL: THERMOPLASTIC ELASTOMER, TPE (TPO TYPE)
 COLOR: GRAY
 MARKING: NONE
 STANDARD: NONE
 CANADIAN: SEE "PRINTING ILLUSTRATION" VIEW

CONDUCTORS MATERIAL: 30 AWG, 7 X 38AWG (7 X Ø0.102) TINNED STRANDED COPPER

ELECTRICAL :

VOLTAGE RATING: USA 150V CANADIAN 150V EU: <50V
 INSULATION RESISTANCE: >1 X 10¹⁰Ω/10ft. [3m]

CHARACTERISTIC IMPEDANCE:	UNBALANCED 82Ω	BALANCED 138Ω
CAPACITANCE:	17.3 pF/ft [56.8 pF/m]	10.0 pF/ft [32.8 pF/m]
INDUCTANCE:	0.12μH/ft [0.38μH/m]	0.19μH/ft [0.62μH/m]
PROPAGATION DELAY:	1.42 ns/ft [4.66 ns/m]	1.38 ns/ft [4.53 ns/m]
VELOCITY OF PROPAGATION:	72%	74%

NOTE: UNBALANCED IS MEASURED BETWEEN GROUND-SIGNAL-GROUND CONDUCTORS.
 BALANCED IS MEASURED BETWEEN SIGNAL CONDUCTORS WITHIN A PAIR.

ENVIRONMENTAL :

TEMPERATURE RATING: -40°C TO +105°C
 FLAMMABILITY RATING: USA: UL HORIZONTAL CANADA: FT2



CANADIAN OPTION
 "PRINTING ILLUSTRATION"

AWM 20297 105C 150V HB 3M NU

AWM 1A 105C 150V FT2 EU <50V

3M ELECTRONICS MATERIALS SOLUTIONS DIVISION
 INTERCONNECT SOLUTIONS
<http://www.3m.com/interconnect>

3M IS A TRADEMARK OF 3M COMPANY.
 FOR TECHNICAL, SALES OR ORDERING INFORMATION CALL 800-225-5373

INCH [MM]			
TOLERANCE - UNLESS NOTED			
INCH	±.1	±.05	±.010
[] = DIM.	FOR REFERENCE ONLY		

DIMENSIONS: INCH [MM]

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
		L	SCHMIDT	DEC 14, 2021	MFG	DATE
		T	PLEPYS	JAN 04, 2022	APPL	DATE
DIVISION		DIVISION CODE		© 3M COPYRIGHT 2022 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.		
DO NOT SCALE DRAWING	SCALE 4/1	TOLERANCES EXCEPT AS NOTED		3M St. Paul, MN 55144 TITLE: ROUND CONDUCTOR FLAT CABLE SERIES 3756 .025" 30AWG STRANDED		
THIRD ANGLE PROJECTION		MILLIMETERS		CAGE NUMBER: D78-5100-0508-1 DRAWING NO.: H REV.: H		
INTERPRET PER ASME Y14.5 - 2018		MILLIMETERS		MODEL: 125 ALL SURFACES MARKED ONLY ANGLES ±1°		

H REVISION
 178-5100-0508-1 DRAWING NUMBER
 B
 1/20/2022 -- UTC Drr:set (hrs) 6
 A
 Time 1/20/2022 -- UTC

8 7 6 5 4 3 2 1
3M™ ROUND CONDUCTOR FLAT CABLE, 3756 SERIES
 .025" 30 AWG STRANDED, TPE

Regulatory: For regulatory information about this product, visit 3M.com/regs or contact your 3M representative.

Technical Information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use: Many factors beyond 3M's control and uniquely within user's control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.


Warranty, Limited Remedy, and Disclaimer: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OR TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

3M Business Center
 Electronics Materials Solutions Division
 13011 McCallen Pass, BLDG C
 Austin, TX 78753-5380
 1-800-225-5373
www.3M.com/interconnect

3M ELECTRONICS MATERIALS SOLUTIONS DIVISION
 INTERCONNECT SOLUTIONS
<http://www.3M.com/interconnect>

3M IS A TRADEMARK OF 3M COMPANY.
 FOR TECHNICAL, SALES OR ORDERING
 INFORMATION CALL 800-225-5373

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
				L		JAN 04, 2022 REDRAWN WORK REQUEST 13221		LDS	TRP
APPROVED		DATE		DATE		DATE		DATE	
L SCHMIDT		DEC 14, 2021		MFG					
T PLEPYS		JAN 04, 2022		APPL					
DIVISION		DIVISION CODE		 © 3M COPYRIGHT 2022 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.					
DO NOT SCALE DRAWING	SCALE 4/1	TOLERANCES EXCEPT AS NOTED		INCHES .0 ± .1 .00 ± .02 .000 ± .005 .0000 ± .0002					
THIRD ANGLE PROJECTION		MILLIMETERS		0 ± .0 ± .00 ± .000 ±					
INTERPRET PER ASME Y14.5 - 2018		MILLIMETERS		0 ± .0 ± .00 ± .000 ±					
MAX SURFACE ROUGHNESS 125		MILLIMETERS		CAGE NUMBER		DRAWING NO.		REV.	
<input type="checkbox"/> ALL SURFACES <input checked="" type="checkbox"/> MARKED ONLY		ANGLES ±1°		D 78-5100-0508-1		H		H	
				MODEL		DET		SHT 2 OF 2	

78-5100-0508-1
 DRAWING NUMBER
 H
 REVISION
 1/20/2022 -- UTC
 Drr.set (hrs) 6