
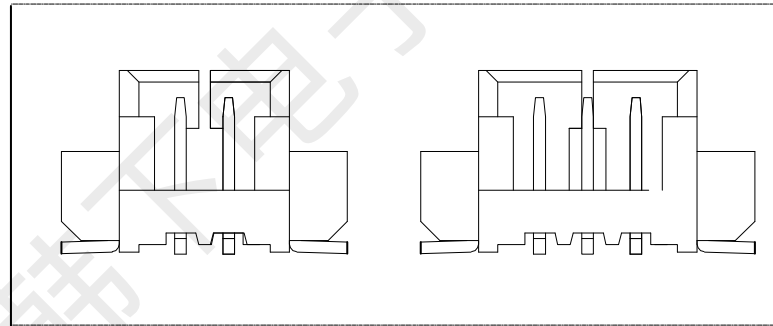


RECOMMENDED P. C. BOARD LAYOUT (TOP VIEW)

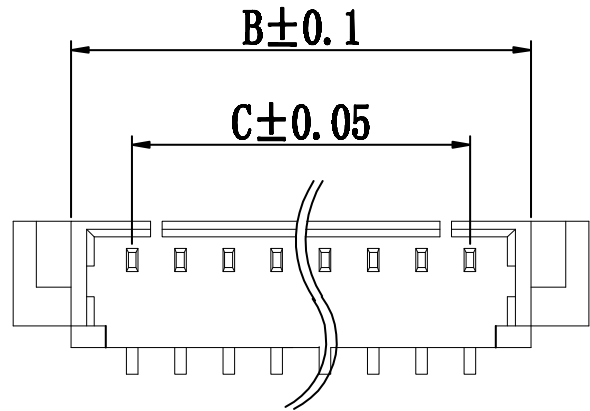

20	29.9	26.9	23.75
19	28.65	25.65	22.5
18	27.4	24.4	21.25
17	26.15	23.15	20.0
16	24.9	21.9	18.75
15	23.65	20.65	17.5
14	22.4	19.4	16.25
13	21.15	18.15	15.0
12	19.9	16.9	13.75
11	18.65	15.65	12.5
10	17.4	14.4	11.25
9	16.15	13.15	10.0
8	14.9	11.9	8.75
7	13.65	10.65	7.5
6	12.4	9.4	6.25
5	11.15	8.15	5.0
4	9.9	6.9	3.75
3	8.65	5.65	2.5
2	7.4	4.4	1.25
Poles	A	B	C

技术要求

1: 外观要求

- 1-1. 插针表面光洁、无损伤、锈蚀等缺陷。
- 1-2. 基座表面无脏污、飞边、排气不良等缺陷。

2: 电气性能:

- 2-1. 额定电流: 1.0A
- 2-2. 额定电压: 125V
- 2-3. 耐电压: 250V
- 2-4. 接触电阻:  $\leq 20\text{m}\Omega$
- 2-5. 绝缘电阻:  $\geq 100\text{m}\Omega$

3: 工作温度:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

>20	$\pm 0.25$	序号	材料名称	数量	材质	镀涂	REMARK
$>10 \leq 20$	$\pm 0.2$	①	圆针	n	黄铜	高温亮锡	GP PASS
$>3 \leq 10$	$\pm 0.15$	②	塑件	1	LCP	/	GP PASS
$3 \leq$	$\pm 0.1$	③	焊片	2	黄铜	高温亮锡	GP PASS
尺寸范围	公差	④	吸附盖	1	/	/	GP PASS

设计	黄彬	产品名称	HX MX1.25-5PLT
审核	张伟		
批准	罗小春	 深圳市韩下电子有限公司	
单位: mm			