
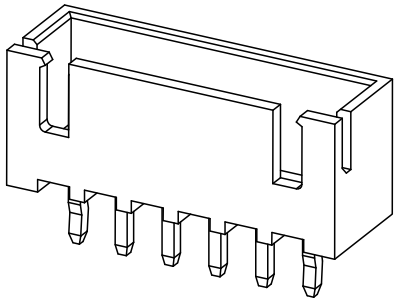




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图框升级整理图面	2024.08.08	阿 树

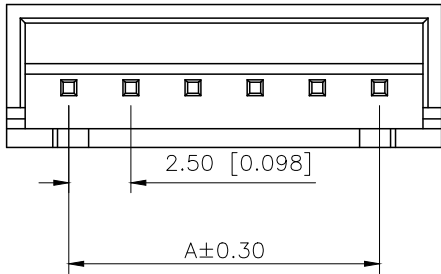

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:1000V AC/minute
 - Temperature range:-45°C+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing:≤20mΩ


PART NO.:
X8821 W V-XX K-N0 SN
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
② Category:W-Wafer
③ Welding Board Angle:V-Stright 180°
④ Row No-Pin No: XX-02P~20P
⑤ Piug the Pin & Special No.:K-KINK
⑥ Material:N0-PA66 94V-0;
⑦ Planting Category:SN-Bright Tin Plating

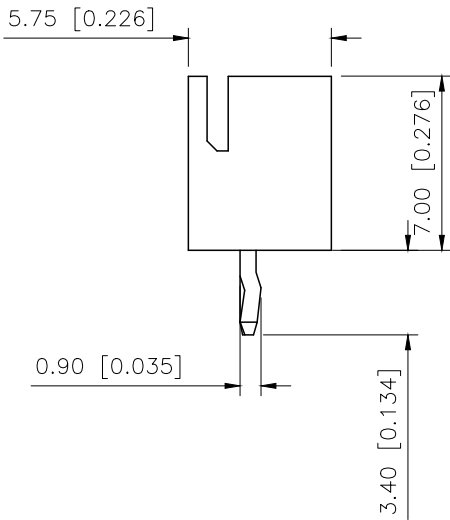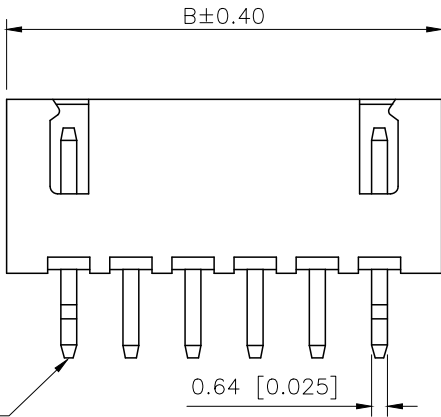

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.50	7.50	12	27.50	32.50
03	5.00	10.00	13	30.00	35.00
04	7.50	12.50	14	32.50	37.50
05	10.00	15.00	15	35.00	40.00
06	12.50	17.50	16	37.50	42.50
07	15.00	20.00	17	40.00	45.00
08	17.50	22.50	18	42.50	47.50
09	20.00	25.00	19	45.00	50.00
10	22.50	27.50	20	47.50	52.50
11	25.00	30.00			

Circuit 1

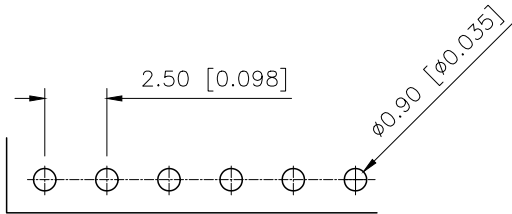

PCB LAYOUT

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

XKB

X8821WV-XXK-N0SN	Nylon 66 UL 94V-0	Brass	Tin-Plated	X8821H
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Terminal
DESIGN	阿 树	VIEW:	MODEL TYPE: 2.50 mm Crimp Style Connectors	
CHECKED		UNIT: mm/in	PART NO.: X8821WV-XXK-N0SN	
APPROVED		SIZE: A4	DWG NO.:	

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1