

Harvatek Surface Mount LED Data Sheet HT-191 Series

Official Product	Product: HT-191 Series	Data Sheet No.				
Tentative Product	*****	****				
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 1/25		

DISCLAIMER
PRODUCT SPECIFICATIONS4
LABEL SPECIFICATIONS
PRODUCT CHARACTERISTICS
Absolute Maximum Ratings11
ELECTRO-OPTICAL CHARACTERISTICS12
PACKAGE OUTLINE DIMENSION13
RECOMMENDED SOLDERING PATTERN FOR REFLOW SOLDERING
CHARACTERISTIC CURVES FOR YG, Y, D, SD AND UR14
CHARACTERISTIC CURVES FOR UYG, UY, UD, USD, AND URO15
CHARACTERISTIC CURVES FOR NB, NG AND TW16
CHARACTERISTIC CURVES FOR ALL COLORS (RADIATION PATTERN)
PACKAGING18
TAPE DIMENSION
REEL DIMENSION
Packing
DRY PACK21
REFLOW SOLDERING
PRECAUTIONS23
Reworking23
CLEANING
RELIABILITY24

Official Product	Product: HT-191 Series	Data Sheet No.		
Tentative Product	*****	HT-191 Series		
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 2/25

DISCLAIMER

HARVATEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. HARVATEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

LIFE SUPPORT POLICY

HARVATEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of HARVATEK or HARVATEK INTERNATIONAL. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.

2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Official Product	Product: HT-191 Series	Data Sheet No.		
Tentative Product	******	HT-191 Series		
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 3/25

Product Specifications

Product	Emission Color	Technology	Test Current I _F (mA)	Luminous Intensity I _V (mcd)	Forward Voltage V _F (V)	Orderable Part Number
HT-191YG	Yellow Green	GaP	20	20 typ	2.2 typ	HT-191YG-YYYY
HT-191Y	Yellow	GaAsP	20	8 typ	2.1 typ	HT-191Y-YYYY
HT-191D	Orange	GaAsP	20	9 typ	2.1 typ	HT-191D-YYYY
HT-191SD	Red	GaAsP	20	11 typ	2.1 typ	HT-191SD-YYYY
HT-191UR	Bright Red	AlGaAs	20	16 typ	1.8 typ	HT-191UR-YYYY
HT-191URO	Ultra Deep Red	AllnGaP	20	120 typ	1.9 typ	HT-191URO-YYYY
HT-191UYG	Ultra Bright Yellow Green	AllnGaP	20	60 typ	2.0 typ	HT-191UYG-YYYY
HT-191UY	Ultra Bright Yellow	AllnGaP	20	140 typ	1.9 typ	HT-191UY-YYYY
HT-191UD	Ultra Bright Orange	AllnGaP	20	110 typ	1.9 typ	HT-191UD-YYYY
HT-191USD	Ultra Bright Red	AllnGaP	20	120 typ	1.9 typ	HT-191USD-YYYY
HT-191NB	Blue	InGaN	20	40 typ	3.3 typ	HT-191NB-YYYY
HT-191NG	True Green	InGaN	20	140 typ	3.3 typ	HT-191NG-YYYY
HT-191TW	White	InGaN	20	285 typ	3.3 typ	HT-191TW-YYYY

Official Product	Product: HT-191 Series	Data Sheet No.				
Tentative Product	*****	****				
Specifications are subject drawings herein are copy	Jan. 14, 2009	Version of 1.4	Page 4/25			

Specification	Material	Quantity
Clear Diffused	Epoxy resin	
Per EIA 481-1A specs	Conductive black tape	4000pcs per reel
Per EIA 481-1A specs	Conductive black	
HT standard	Paper	
220x240mm	Aluminum laminated bag/ no-zipper	One reel per bag
HT standard	Paper	
	Clear Diffused Per EIA 481-1A specs Per EIA 481-1A specs HT standard 220x240mm	Clear DiffusedEpoxy resinPer EIA 481-1A specsConductive black tapePer EIA 481-1A specsConductive blackHT standardPaper220x240mmAluminum laminated bag/ no-zipper

Others:

Each immediate box consists of 5 reels. The 5 reels may not necessarily have the same lot number or the same bin combinations of Iv, λ_D and Vf. Each reel has a label identifying its specification; the immediate box consists of a product label as well.

ATTENTION: Electrostatic Discharge (ESD) protection



The symbol to the left denotes that ESD precaution is needed. ESD protection for GaP and AlGaAs based chips is necessary even though they are relatively safe in the presence of low static-electric discharge. Parts built with AlInGaP, GaN, or/and

InGaN based chips are **STATIC SENSITIVE devices**. ESD precaution must be taken during design and assembly.

If manual work or processing is needed, please ensure the device is adequately protected from ESD during the process.

Compliance and Certified


ISO9002, QS9000 and ISO14001 Certified RoHS Compliant




Official Product	Product: HT-191 Series	Data Sheet No.		
Tentative Product	*****	HT-191 Series		
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 5/25



Label Specifications

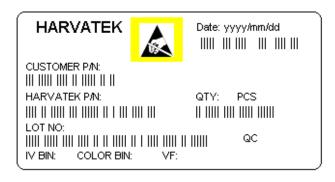

Harvatek P/N:

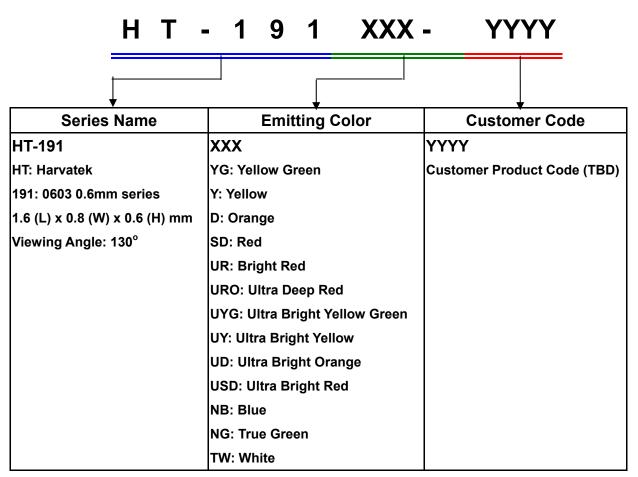

Official Product	Product: HT-191 Series	Data Sheet No.		
Tentative Product	*****	HT-191 Series		
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 6/25

Lot No.:

1	2	3	4	5	6	7	8	9	10
Ρ	1	2	2	3	0	Α	-	D	Т

Code 1	Code 2	Code 3	Code 4, 5	Code 6, 7	Code 9	Code 10
	Mfg. Year	Mfg. Month	Mfg. Date	Lots	Resin Color	Packaging
		1: Jan.				
	Z: 2000	2: Feb.				
Internal	1: 2001			01~99,	C: Clear	
Tracing	2: 2002	9: Sep.	1~31/ (30)		D: Diffused	T: Tape & Reel
Code	3: 2003	A: Oct.		A,B,C		
		B: Nov.				
		C: Dec.				

Luminous Intensity (Iv) Bin:

Bin	Luminous Inten	sity Range (mcd)	Bin	Luminous Intensity Range (mcd)		
DIII	Minimum	Maximum	ЫШ	Minimum	Maximum	
H1	2.8	3.6	H2	3.6	4.5	
J1	4.5	5.7	J2	5.7	7.2	
K1	7.2	9.0	K2	9.0	11.2	
L1	11.2	14.2	L2	14.2	18.0	
M1	18.0	22.5	M2	22.5	28.5	
N1	28.5	36.0	N2	36.0	45.0	
P1	45.0	57.0	P2	57.0	71.5	
Q1	71.5	90.0	Q2	90.0	112.5	
R1	112.5	142.0	R2	142.0	180.0	
S1	180.0	227.0	S2	227.0	285.0	
T1	285.0	360.0	T2	360.0	450.0	
U1	450.0	570.0	U2	570.0	715.0	

@20mA / Ta=25[°] C, Tolerance: <u>+</u> 10%

Official Product	Product: HT-191 Series Data Sheet No.						
Tentative Product	*****	HT-191 Series					
Specifications are subject drawings herein are copy	t to change without notice. Data and righted.	Jan. 14, 2009	Version of 1.4	Page 7/25			

Wavelength (λ_D) Bin:

		Wavelength Range (nm)										
Bin	Brigh	t Red	R	əd	Ora	nge	Yel	low	Yellow	Green	R	ed
	(U	R)	(S	D)])	D)	()	()	(Y	G)	(US	SD)
	Min	Мах	Min	Max	Min	Max	Min	Max	Min	Max	Min	Мах
-	620.0	650.0	615.0	635.0							615.0	630.0
Α					597.0	600.0	582.0	584.5	561.5	564.5		
В					600.0	603.0	584.6	587.0	564.5	567.5		
С					603.0	606.0	587.0	589.5	567.5	570.5		
D					606.0	609.0	589.5	592.0	570.5	573.5		
Е					609.0	612.0	592.0	594.5	573.5	576.5		
F					612.0	615.0	594.5	597.0				
н												
J												

@20mA / Ta=25[°] C, Tolerance: <u>+</u> 0.5nm

					Wav	elength	Range	(nm)					
Bin	Deep	Red	Ora	nge	Yellow		Yellow Green		True Green		Blue		
	(UF	RO)	(U	(UD)		(UY)		(UYG)		(NG)		(NB)	
	Min	Max	Min	Max	Min	Max	Min	Мах	Min	Мах	Min	Мах	
-	630.0	650.0											
Α			597.0	600.0	582.0	584.5	561.5	564.5	515.0	520.0	460.0	464.0	
В			600.0	603.0	584.6	587.0	564.5	567.5	520.0	525.0	464.0	468.0	
С			603.0	606.0	587.0	589.5	567.5	570.5	525.0	530.0	468.0	472.0	
D			606.0	609.0	589.5	592.0	570.5	573.5	530.0	535.0	472.0	476.0	
Е			609.0	612.0	592.0	594.5	573.5	576.5	535.0	540.0	476.0	480.0	
F			612.0	615.0	594.5	597.0					480.0	485.0	
н													
J													

@20mA / Ta=25[°] C, Tolerance: <u>+</u> 0.5nm

Official Product	Product: HT-191 Series	Product: HT-191 Series D					
Tentative Product	*****	HT-191 Series					
Specifications are subject drawings herein are copy	t to change without notice. Data and righted.	Jan. 14, 2009	Version of 1.4	Page 8/25			

Forward Voltage (V_F) Bin:

Color	Bin Code	Spec. Range	
Ultra Bright		2.4 V max	
(UYG, UY, UD, USD, URO)	-	2.4 V max	
Standard Bright		2.6 V max	
(YG, Y, D, SD)	-	2.0 V IIIAX	
Bright Red (UR)	-	2.2 V max	
Blue (NB)			
Green (NG)	-	3.9V max	
White (TW)			

@20mA / Ta=25°C, Tolerance: <u>+</u> 0.05 V


Official Product	Product: HT-191 Series	Data Sheet No.					
Tentative Product	******	HT-191 Series					
Specifications are subject drawings herein are copy	t to change without notice. Data and righted.	Jan. 14, 2009	Version of 1.4	Page 9/25			



Chromaticity Bin (for TW only):

	Rank C1							
х	0.2500	0.2500 0.2700 0.2700 0.250						
У	0.2500	0.2775	0.2325	0.2050				
		Ran	k D1					
х	0.2900	0.3100	0.3100	0.2900				
	0.3050 0.3325 0.2875 0.260							

	Rank C2								
х	0.2700	0.2900	0.2900	0.2700					
У	0.2775	0.3050	0.2600	0.2325					
		Rank D2							
х	0.3100	0.3300	0.3300	0.3100					
У	0.3325	0.3600	0.3150	0.2875					

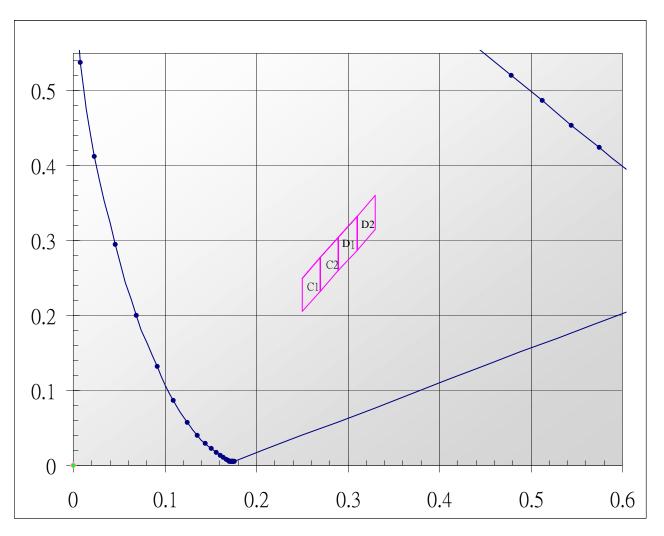

^{@20}mA / Ta=25 $^{\circ}$ C , Tolerance: <u>+</u> 0.01

Official Product	Product: HT-191 Series	Product: HT-191 Series Da					
Tentative Product	*****	****** HT-191 Se					
Specifications are subjec drawings herein are copy	t to change without notice. Data and righted.	Jan. 14, 2009	Version of 1.4	Page 10/25			

Product Characteristics

Absolute Maximum Ratings

Product	Emission Color	P _d (mW)	I _F (mA)	I _{FP} * (mA)	V _R (V)	Top (°C)	Ts⊤ (ºC)
HT-191YG	Yellow Green						
HT-191Y	Yellow	05	05	100			
HT-191D	Orange	65	25	100			
HT-191SD	Red						
HT-191UR	Bright Red	66	30	100			-40°C~+90°C
HT-191URO	Ultra Deep Red			100	5	-30°C~+85°C	
HT-191UYG	Ultra Bright Yellow Green		30				
HT-191UY	Ultra Bright Yellow	72					
HT-191UD	Ultra Bright Orange						
HT-191USD	Ultra Bright Red						
HT-191NB	Blue						
HT-191NG	True Green	78	20	80	5	-30°C~+85°C	-40°C~+90°C
HT-191TW	White						

* Condition for $I_{\mbox{\scriptsize FP}}$ is pulse of 1/10 duty and 0.1msec width

Official Product	Product: HT-191 Series	roduct: HT-191 Series					
Tentative Product	*****	++++++++++++++++++++++++++++++++++++++					
Specifications are subjec drawings herein are copy	t to change without notice. Data and righted.	Jan. 14, 2009	Version of 1.4	Page 11/25			

Electro-Optical Characteristics

									(Ta 25 °C	
	Emission		VF	(V)		λ(nm)			l* _∨ (mcd)	
Product	Color	l _F (mA)	typ	max	λD	λP	Δλ	min	typ	
HT-191YG	Yellow Green	20	2.2	2.6	573	568	30	9	20	
HT-191Y	Yellow	20	2.1	2.6	590	589	35	3.6	8	
HT-191D	Orange	20	2.1	2.6	608	610	35	3.6	9	
HT-191SD	Red	20	2.1	2.6	629	642	35	5.6	11	
HT-191UR	Bright Red	20	1.8	2.2	643	660	20	9	16	
HT-191URO	Ultra Deep Red	20	1.9	2.4	632	645	22	56	120	
HT-191UYG	Ultra Bright Yellow Green	20	2.0	2.4	573	574	20	35	60	
HT-191UY	Ultra Bright Yellow	20	1.9	2.4	591	593	15	35	140	
HT-191UD	Ultra Bright Orange	20	1.9	2.4	605	609	17	25	110	
HT-191USD	Ultra Bright Red	20	1.9	2.4	622	636	17	56	120	
HT-191NB	Blue	20	3.3	3.9	470	468	40	25	40	
HT-191NG	True Green	20	3.3	3.9	527	520	40	60	140	
HT-191TW	White	20	3.3	3.9	X=0.29 Y=0.31	-	-	140	285	


* Per NIST standards

Official Product	Product: HT-191 Series			Data Sheet No.
Tentative Product	******			HT-191 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 12/25

Package Outline Dimension

Recommended Soldering Pattern for Reflow Soldering


Unit: mm Tolerance: +/-0.1

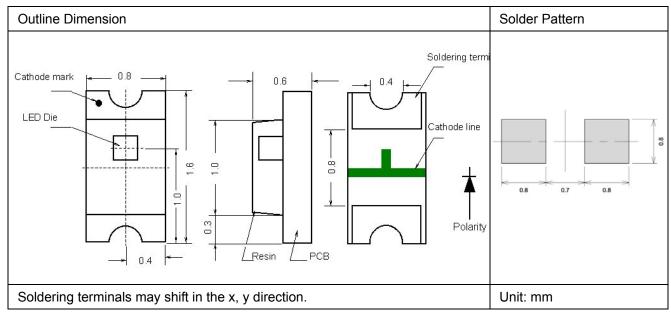

Official Product	Product: HT-191 Series			Data Sheet No.
Tentative Product	******			HT-191 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 13/25




Characteristic Curves for YG, Y, D, SD and UR

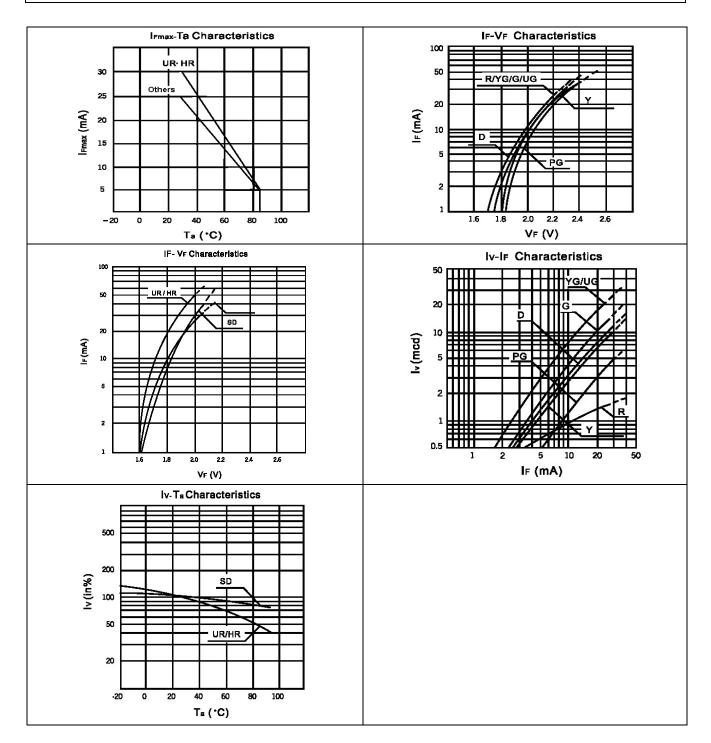

Official Product	Product: HT-191 Series			Data Sheet No.
Tentative Product	******			HT-191 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 14/25


Characteristic Curves for UYG, UY, UD, USD, and URO

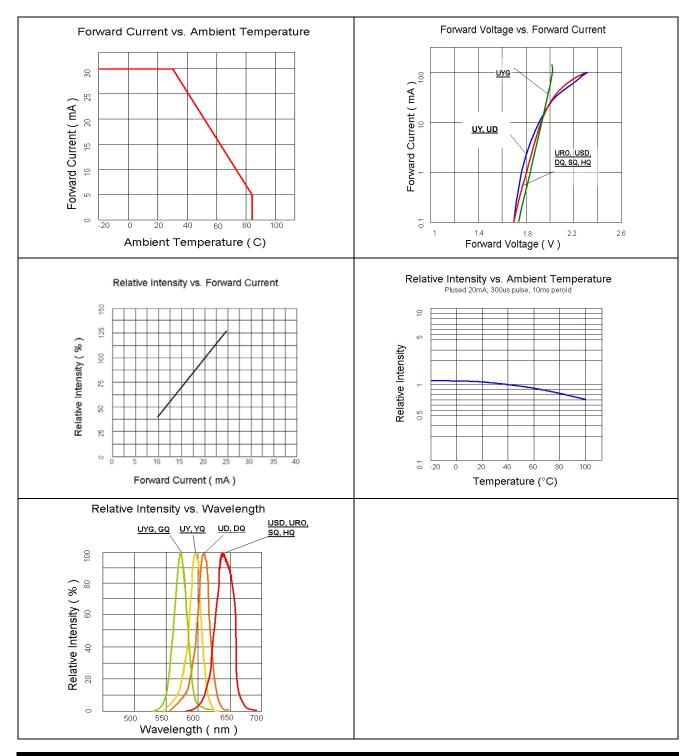

Official Product	Product: HT-191 Series			Data Sheet No.
Tentative Product	********			HT-191 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 15/25




Characteristic Curves for NB, NG and TW

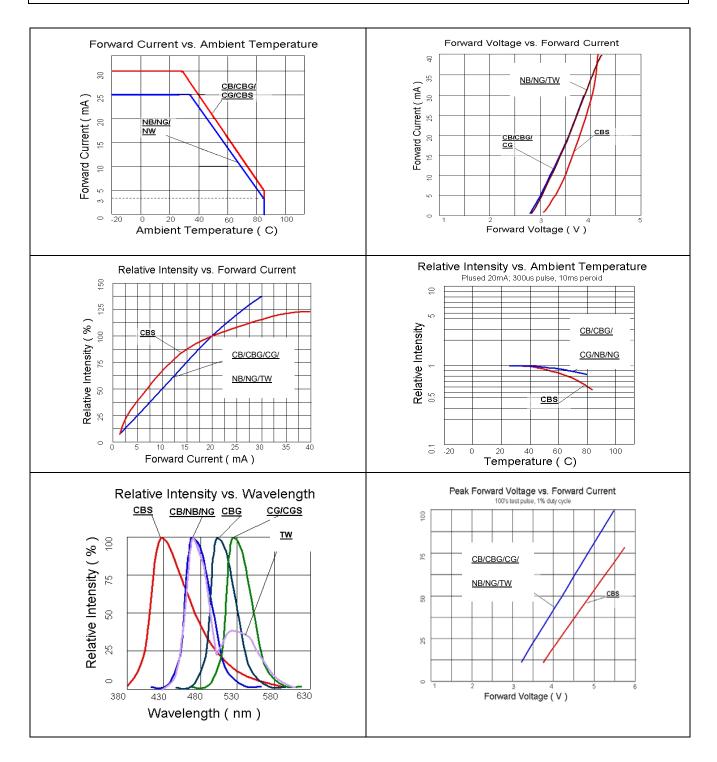

Official Product	Product: HT-191 Series			Data Sheet No.
Tentative Product	*******			HT-191 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 16/25




Characteristic Curves for All Colors (Radiation Pattern)

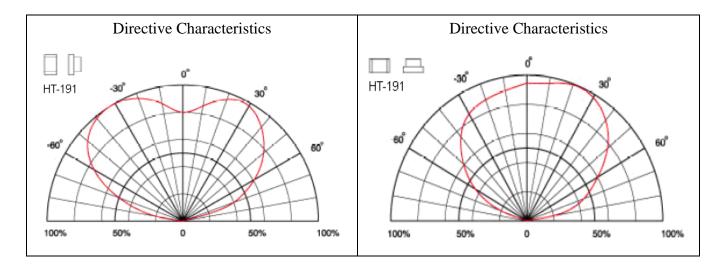

Official Product	Product: HT-191 Series			Data Sheet No.
Tentative Product	******			HT-191 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 17/25

Packaging

Tape Dimension

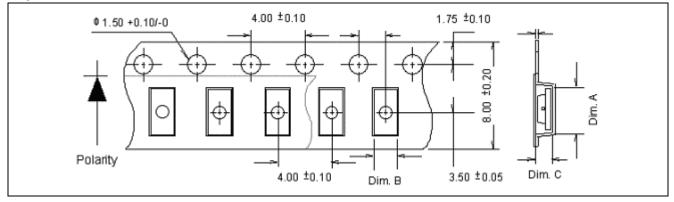


Part No.	Dim. A	Dim. B	Dim. C	Q'ty/Reel
HT-191	1.80±0.10	0.95±0.10	0.75±0.10	4K

Unit: mm

Official Product	Product: HT-191 Series			Data Sheet No.
Tentative Product	*********			HT-191 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 18/25


Reel Dimension

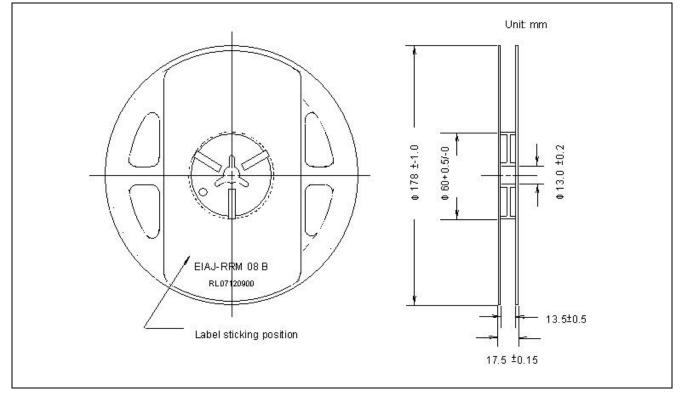

Official Product	Product: HT-191 Series			Data Sheet No.
Tentative Product	******			HT-191 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 19/25



Packing

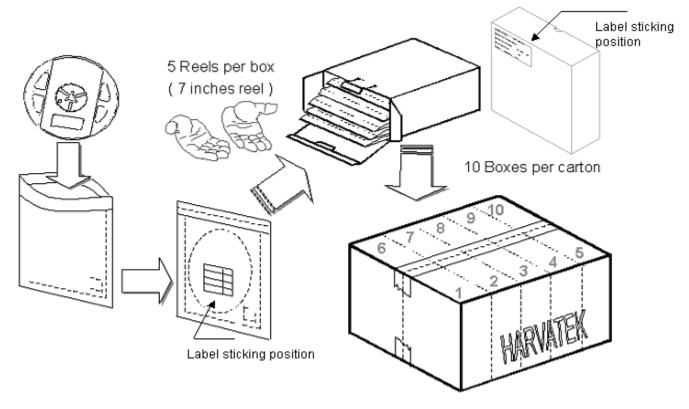

5 boxes per carton is available depending on shipment quantity.

	Specification	Material	Quantity		
Carrier tape	Per EIA 481-1A specs	Conductive black tape	4000pcs per reel		
Reel	Per EIA 481-1A specs	Conductive black			
Label	HT standard	Paper			
Packing bag	220x240mm	Aluminum laminated bag/ no-zipper	One reel per bag		
Carton	HT standard	Paper	Non-specified		
Others:					
Each immediate	Each immediate box consists of 5 reels. The 5 reels may not necessarily have the same lot number or the same				
bin combinations of Iv, λ_D and Vf. Each reel has a label identifying its specification; the immediate box consists of					
a product label a	is well.				


Official Product	Product: HT-191 Series			Data Sheet No.
Tentative Product	********			HT-191 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 20/25

Dry Pack

All SMD optical devices are **MOISTURE SENSITIVE**. Avoid exposure to moisture at all times during transportation or storage. Every reel is packaged in a moisture protected anti-static bag. Each bag is properly sealed prior to shipment.

Upon request, a humidity indicator will be included in the moisture protected anti-static bag prior to shipment.

The packaging sequence is as follows:

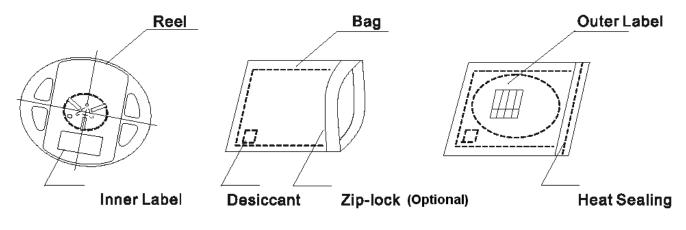


Official Product	Product: HT-191 Series			Data Sheet No.
Tentative Product	*******			HT-191 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 21/25


Reflow Soldering

- Recommended tin glue specifications: melting temperature in the range of 178~192 °C
- The recommended reflow soldering profile is as follows (temperatures indicated are as measured on the surface of the LED resin):

Lead Solder Profile

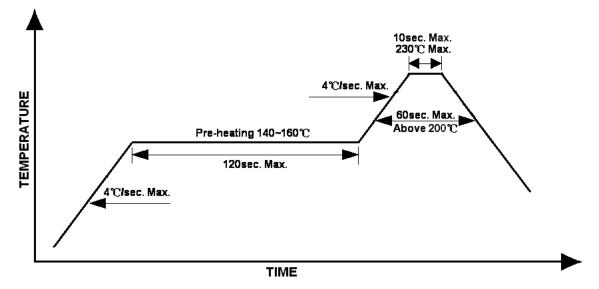



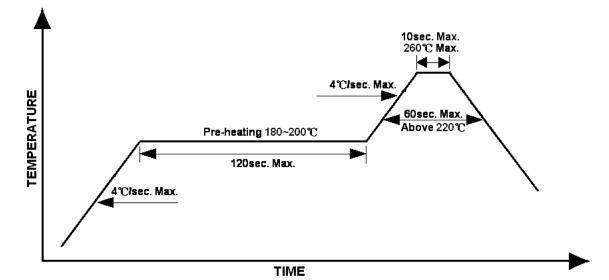

Official Product	Product: HT-191 Series			Data Sheet No.
Tentative Product	*****			HT-191 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 22/25

Precautions

- 1. Avoid exposure to moisture at all times during transportation or storage.
- 2. Anti-Static precaution must be taken when handling GaN, InGaN, and AlInGaP products.
- 3. It is suggested to connect the unit with a current limiting resistor of the proper size. Avoid applying a reverse voltage beyond the specified limit.
- 4. Avoid operation beyond the limits as specified by the absolute maximum ratings.
- 5. Avoid direct contact with the surface through which the LED emits light.
- 6. If possible, assemble the unit in a clean room or dust-free environment.

Reworking

- Rework should be completed within 5 seconds under 260 °C.
- The iron tip must not come in contact with the copper foil.
- Twin-head type is preferred.

Cleaning

Following are cleaning procedures after soldering:

- An alcohol-based solvent such as isopropyl alcohol (IPA) is recommended.
- Temperature x Time should be 50°C x 30sec. or <30°C x 3min
- Ultra sonic cleaning: < 15W/ bath; bath volume ≤ 1liter
- Curing: 100 ^oC max, <3min

Cautions of Pick and Place

- Avoid stress on the resin at elevated temperature.
- Avoid rubbing or scraping the resin by any object.
- Electro-static may cause damage to the component. Please ensure that the equipment is properly grounded. Use of an ionizer fan is recommended.

Official Product	Product: HT-191 Series			Data Sheet No.
Tentative Product	*****			HT-191 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 23/25

Reliability

Item	Frequency/ lots/ samples/ failures	Standards Reference	Conditions
Precondition	For all reliability monitoring tests according to JEDEC Level 2	J-STD-020	 1.) Baking at 85°C for 24hrs 2.) Moisture storage at 85°C/ 60% R.H. for 168hrs
Solderability	1Q/ 1/ 22/ 0	JESD22-B102-B And CNS-5068	Accelerated aging 155°C/ 24hrs Tinning speed: 2.5+0.5cm/s Tinning: A: 215°C/ 3+1s or B: 260°C/ 10+1s
Resistance to soldering heat		CNS-5067	Dipping soldering terminal only Soldering bath temperature A: 260+/-5°C; 10+/-1s B: 350+/-10°C; 3+/-0.5s
Operating life test	1Q/ 1/ 40/ 0	CNS-11829	 1.) Precondition: 85°C baking for 24hrs 85°C/ 60%R.H. for 168hrs 2.) Tamb25°C; IF=20mA; duration 1000hrs
High humidity, high temperature bias	1Q/ 1/ 45/ 0	JESD-A101-B	Tamb: 85°C Humidity: 85% R.H., IF=5mA Duration: 1000hrs
High temperature bias	1Q/ 1/ 20	HT specs.	Tamb: 55°C IF=20mA Duration: 1000hrs
Pulse life test	1Q/ 1/ 40/ 0		Tamb25°C, If=20mA,, Ip=100mA, Duty cycle=0.125 (tp=125 μ s,T=1sec) Duration 500hrs)
Temperature cycle	1Q/ 1/ 76/ 0	JESD-A104-A IEC 68-2-14, Nb	A cycle: -40 degree C 15min; +85 degree C 15min Thermal steady within 5 min 300 cycles 2 chamber/ Air-to-air type
High humidity storage test	1Q/ 1/ 40/ 0	CNS-6117	60+3°C 90+5/-10% R.H. for 500hrs
High temperature storage test	1Q/ 1/ 40/ 0	CNS-554	100+10°C for 500hrs
Low temperature storage test	1Q/ 1/ 40/ 0	CNS-6118	-40+5°C for 500hrs

Official Product	Product: HT-191 Series			Data Sheet No.
Tentative Product	********			HT-191 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 24/25

Revision History

Changes since last revision	Page	Version No.	Revision Date
New format		1.0	10-17-2006
Added URO		1.1	01-29-2007
Added viewing angle	6	1.2	03-15-2007
Update to Clear Diffused Lens	5	1.3	09-08-2008
Add InGaN parts		1.4	01-14-2009

Official Product	Product: HT-191 Series			Data Sheet No.
Tentative Product	********			HT-191 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		Jan. 14, 2009	Version of 1.4	Page 25/25