
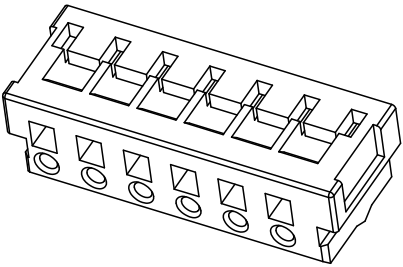


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.09	阿树

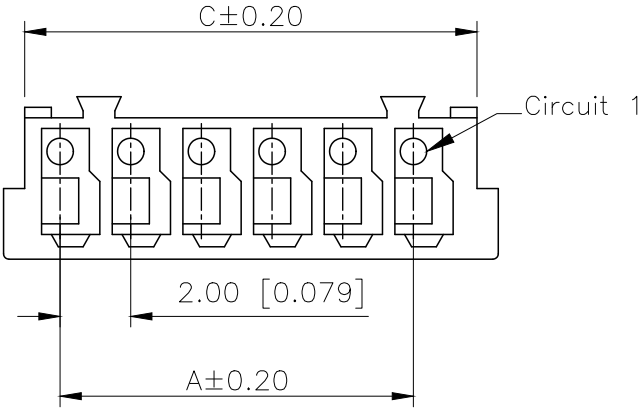




■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:3A AC/DC
- Withstanding Voltage:1000V AC/minute
- Temperature range:−40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤10mΩ
- After environmental testing:≤20mΩ

PART NO.:

X2004 H-XX -N0
① ② ③ ④

- ①Series No
②Category:H-HSG
③Row No.Pin No:XX-02~16P
④Material:N0-PA66 UL94V-0

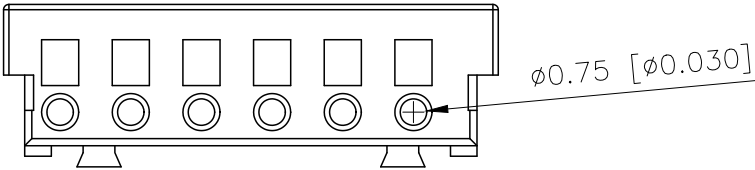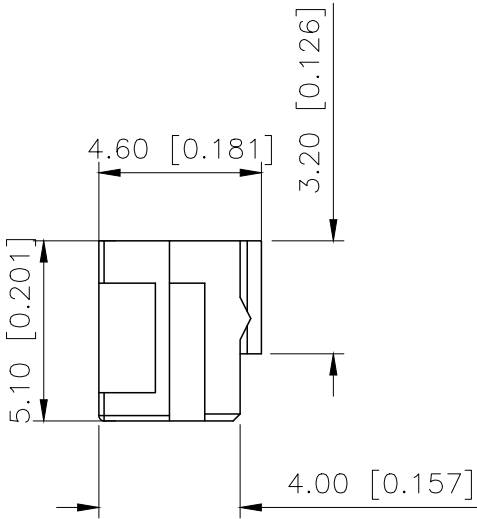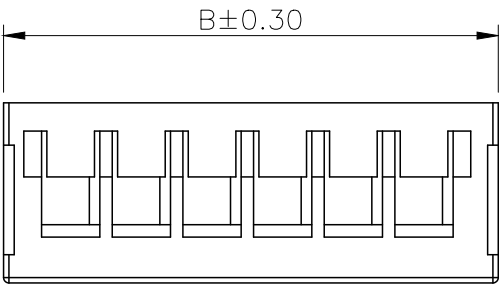

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.00	6.00	4.80	10	18.00	14.00	12.80
03	4.00	7.00	5.80	11	20.00	15.00	13.80
04	6.00	8.00	6.80	12	22.00	16.00	14.80
05	8.00	9.00	7.80	13	24.00	17.00	15.80
06	10.00	10.00	8.80	14	26.00	18.00	16.80
07	12.00	11.00	9.80	15	28.00	19.00	17.80
08	14.00	12.00	10.80	16	30.00	20.00	18.80
09	16.00	13.00	11.80				

X2004H-XX-N0	PA66 UL 94V-0	X2004T	X2004W
PART NO	Matrial	Suitable XKB Terminal	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 2.00mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X2004H-XX-N0
APPROVED		SIZE:	A4	DWG NO.: