

Inductors (Coils)

Product Top Page Search by Part No. Search by Characteristics Cross Reference Catalog Tech Notes Technical Support Tools FAQ

MLZ1608E100MT000



Applications Commercial Grade

Feature Shield Magnetic Shield

Multilayer Multilayer


Ferrite Core Ferrite Core

Series | Type MLZ

Status Production (Not Recommended for New Design)

Recommended Alternate Part No. : [MLZ1608M100WT000](#)

Brand TDK



Images are for reference only and show exemplary products.

PDF file of this page

Contact

Documents

Product Lineup


Size	
Length(L)	1.60mm ±0.15mm
Width(W)	0.80mm ±0.15mm
Thickness(T)	0.80mm ±0.15mm
Recommended Land Pattern (A)	0.60mm Nom.
Recommended Land Pattern (B)	0.80mm Nom.
Recommended Land Pattern (C)	0.80mm Nom.

Electrical Characteristics	
Inductance	10µH ±20% at 2MHz
Rated Current (L Change) [Typ.]	
Rated Current (L Change) [Max.]	40mA (50% Down)
Rated Current (Temperature Rise) [Typ.]	40mA (20°C Rise)
Rated Current (Temperature Rise) [Max.]	40mA (20°C Rise)
DC Resistance [Typ.]	900mΩ
DC Resistance [Max.]	1.17Ω
Self Resonant Frequency [Min.]	
Self Resonant Frequency [Typ.]	
Q [Min.]	
Q [Typ.]	


Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C
Soldering Method	Wave (Flow) Reflow Iron Soldering
AEC-Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000pcs
Weight	0.004g


Characteristic Graph (This is reference data, and does not guarantee the products characteristics.)

Impedance




Rac



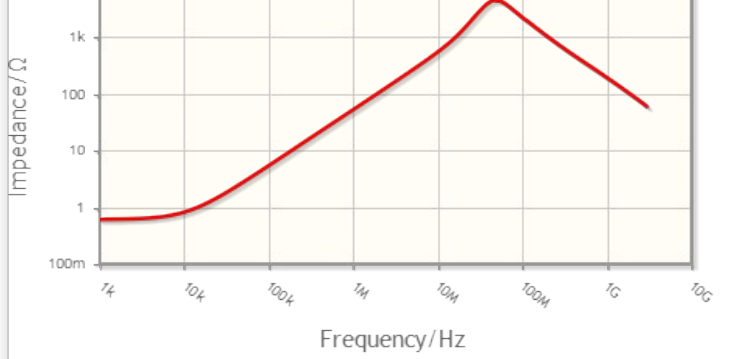


MLZ1608E100MT000

Change settings

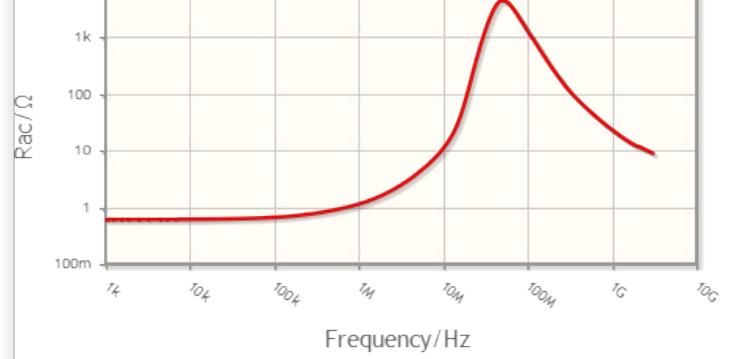


MLZ1608E100MT000

Change settings

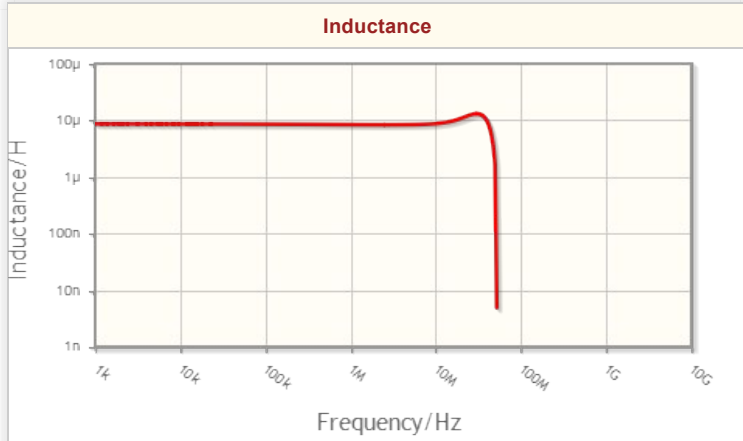


MLZ1608E100MT000

Change settings

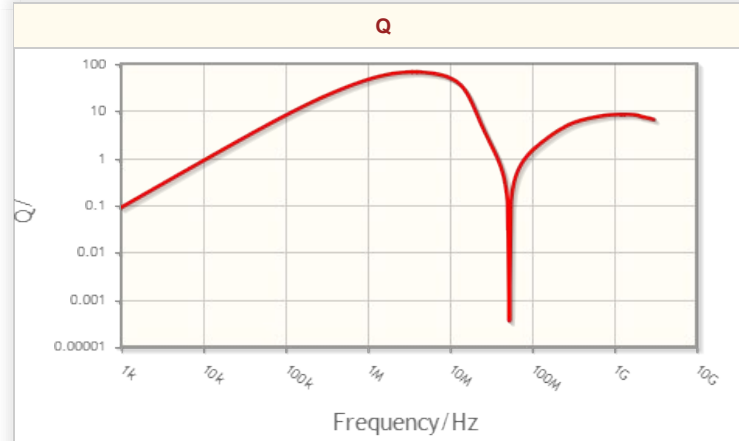


MLZ1608E100MT000


Change settings

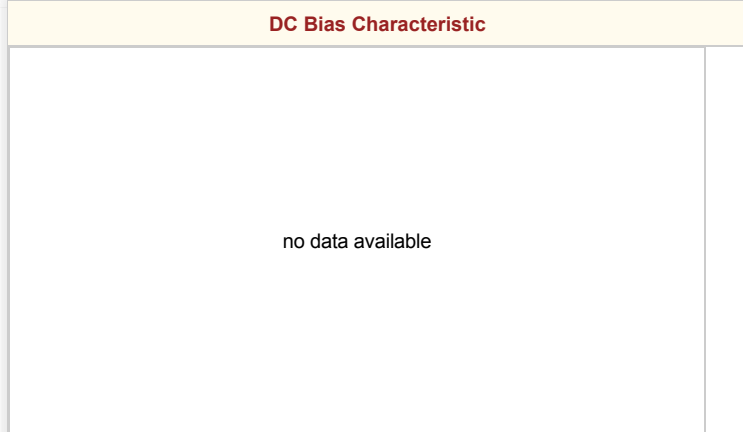

Change settings

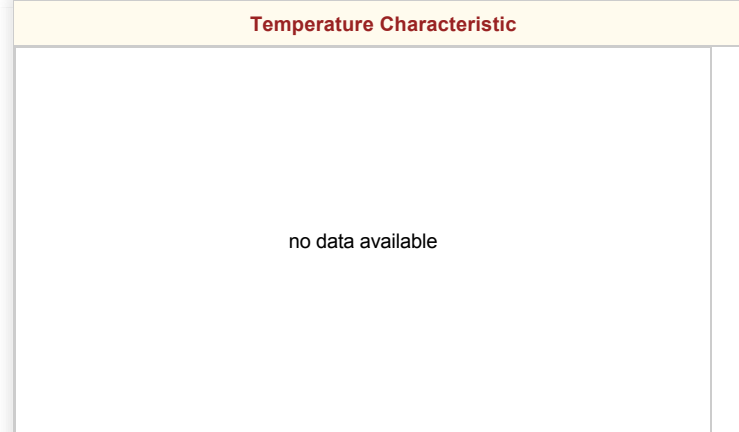

Change settings

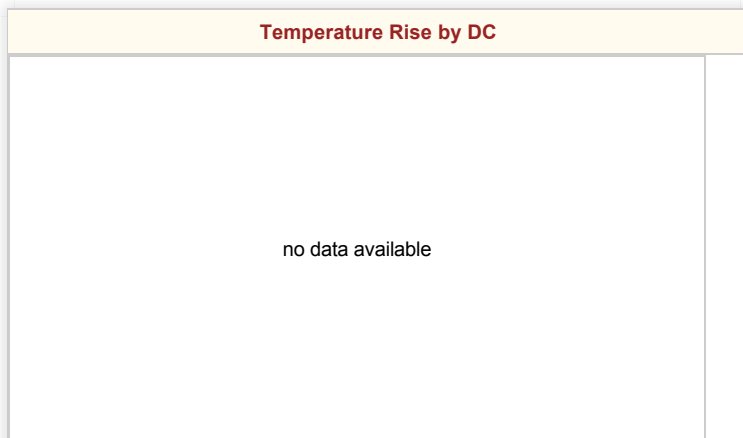

Change settings

Products

» [Search by Part No.](#) » [Search by Characteristics](#) » [Distributor Inventory Check](#)

- » [Capacitors](#)
- » [Inductors \(Coils\)](#)
- » [EMC Components](#)
- » [RF Components and Modules](#)
- » [Voltage / Current / Temperature Protection Devices](#)
- » [Sensors and Sensor Systems](#)
- » [Ceramic Switching / Heating, Piezo Components, Buzzers and Microphones](#)
- » [Transformers](#)
- » [Ferrites and Accessories](#)
- » [Noise Suppressing / Magnetic Sheet](#)
- » [Anechoic Chambers and Radio Wave Absorbers](#)
- » [Power Supplies](#)
- » [Magnets](#)
- » [Flash Storages](#)
- » [Wireless Power Transfer](#)
- » [FA Systems](#)
- » [Transparent Conductive Film](#)
- » [Micro Modules \(Substrates with Built-in ICs, Products Utilizing with SESUB\)](#)
- » [Solar Cells](#)
- » [Biosensor](#)

Application Guides

[Technical Support](#)


[Tech Library](#)


[Environment](#)

[Contact](#)

[News](#)

[Home](#)

 [About TDK](#)

 [TDK Worldwide](#)

