


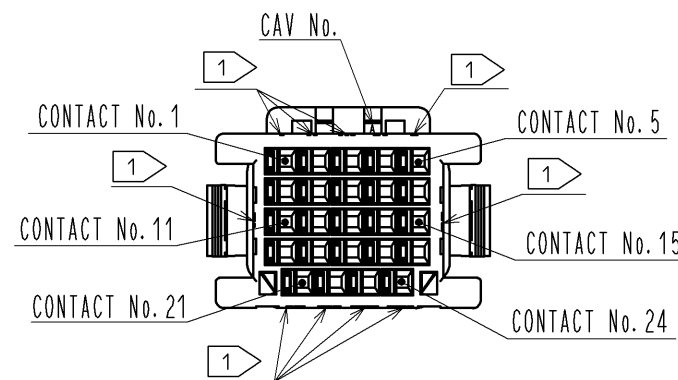
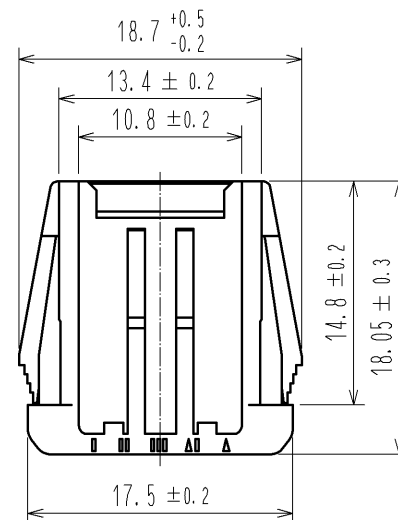
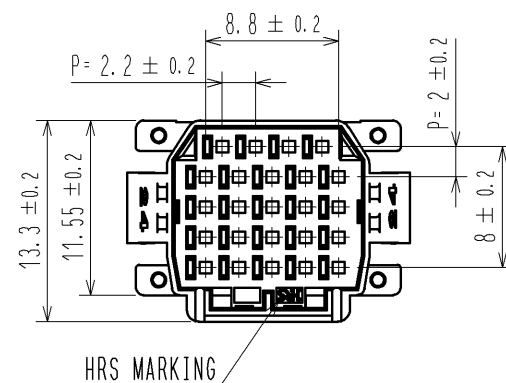


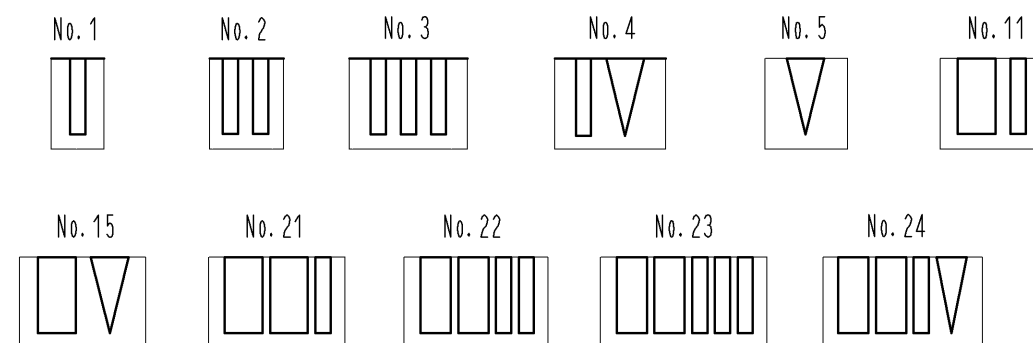


1> FIGURE-1 CONTACT No. MARKING (10:1)




NUMBER OF POS.

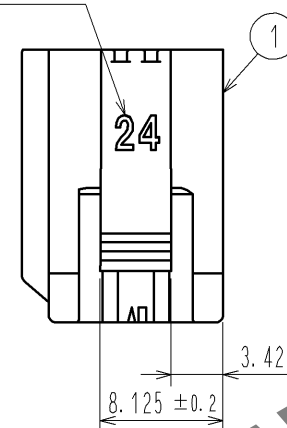

7> MATING FIGURE (PANEL MOUNTED)

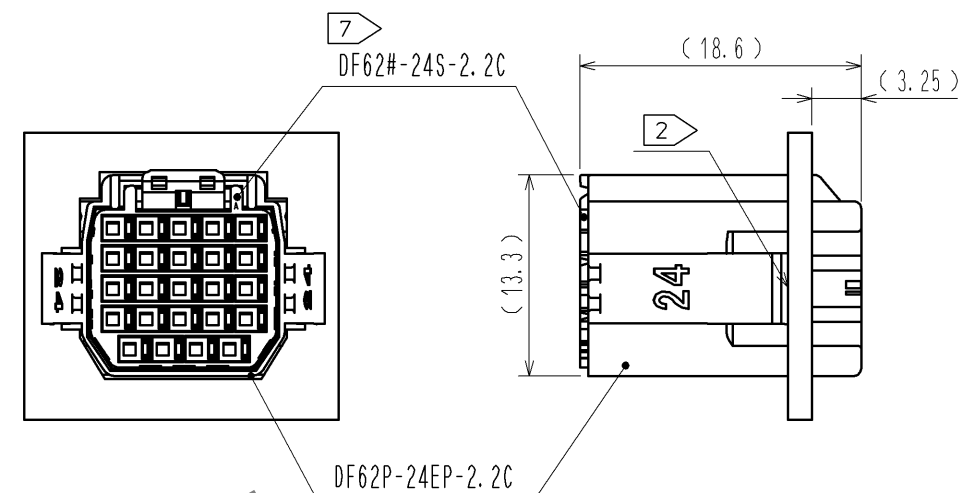

3> RECOMMENDED PANEL CUTOUT DIMENSION

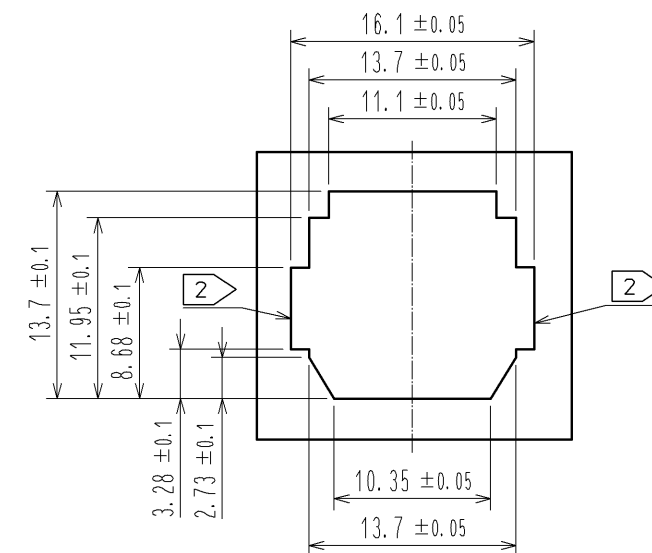

- NOTE. 1> MARKINGS AT THE INDICATED POSITIONS ARE CONTACT NO. MARKING. AND SHAPES ARE SHOWN IN FIGURE-1.
2> PLEASE USE THE NON-RADIUS SIDE FOR THE PANEL HOOKING AREA.
3> APPLICABLE PANEL THICKNESSING IS 2.3 TO 0.5mm.
4> CONSULT HIROSE FOR THE OTHER PANEL CUTOUT DESIGNS THAN THE RECOMMENDED ONE.
5. PER PACK : 100 PIECES.
6. THE DIMENSIONS IN PARENTHESIS ARE FOR REFERENCE.
7> THIS FIGURE SHOWS THE MATED CONDITION WITH DF62B-24S-2.2C.

NO.		MATERIAL		FINISH . REMARKS		1		PBT		UL94V-0(BLACK)	
UNITS		SCALE		COUNT		DESCRIPTION OF REVISIONS		DESIGNED		CHECKED	
mm		2 : 1		△		APPROVED : KI. AKIYAMA		13.12.26		DRAWING NO.	
HRS		HIROSE ELECTRIC CO., LTD.				CHECKED : OM. MIYAMOTO		13.12.26		PART NO.	
						DESIGNED : TH. YOSHIZAWA		13.12.26		CODE NO.	
						DRAWN : MI. SAKIMURA		13.12.25		CL544-0550-7-00	
										EDC3-349142-00	
										DF62P-24EP-2.2C	
										△ 1/1	