
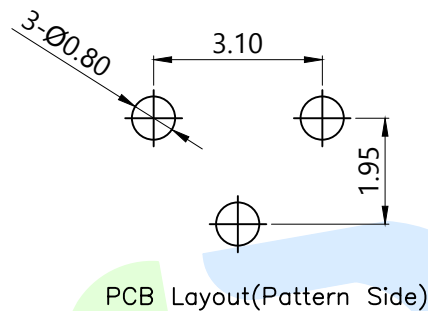
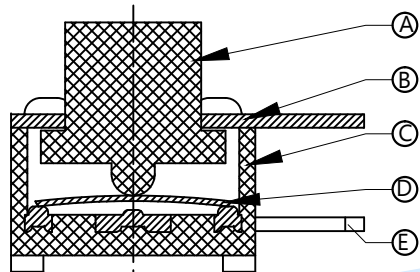





RoHS

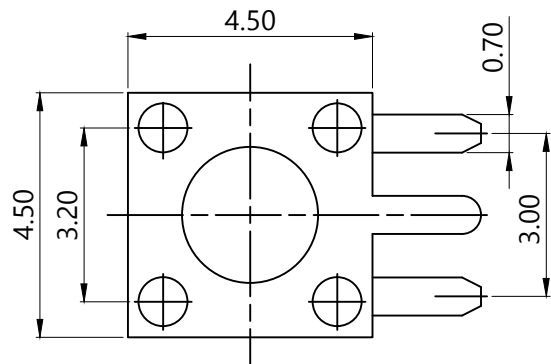

SHRAPNEL	
CODE	MATERIAL/QTY
D2	SUS/1PCS
D4	SUS/2PCS

OPERATING FORCE	
CODE	VIGOR
B1	120±30gf
B2	180±30gf
B3	250±30gf

TOTAL HEIGHT					
CODE	H	φ	CODE	H	φ
A1	3.8	2.40	A10	8.0	2.15
A2	4.3	2.40	A11	8.5	2.15
A3	4.5	2.40	A12	9.0	2.10
A48	4.8	2.35	A13	9.5	2.10
A4	5.0	2.35	A14	10	2.10
A5	5.5	2.35	A145	10.5	2.10
A6	6.0	2.25	A15	11	2.10
A7	6.5	2.25	A155	11.5	2.10
A8	7.0	2.20	A16	12	2.10
A9	7.5	2.15	A17	13	2.05

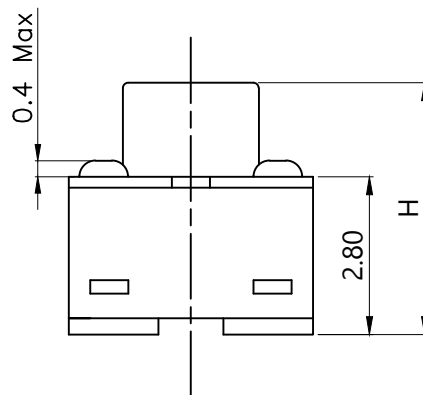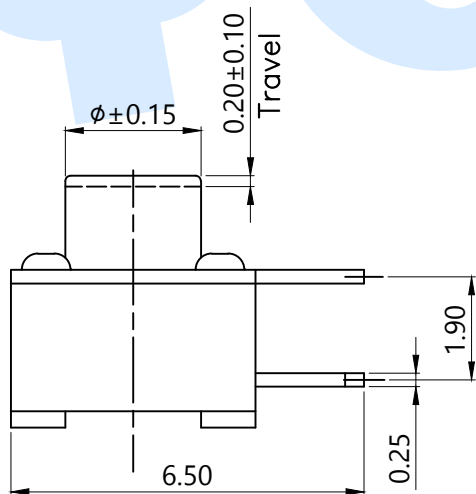

⑤	Terminal		2	Brass	Silvering
④	Reed		1	SUS	Silver covered
③	Base		1	PPA	Black
②	Cover		1	SPCC	Plating Cu Sn
①	Keystoke		1	PPA	Black
NO.	Name	Number	Qty	Materil	Remarks

YUANDI® Yuandi Electronics Co, Ltd

design	date	name	TACT SWITCHS
Review	date	model	TS-1091B-A□B□-D□
Approved	date		

Drawing number: Proportion 1:1 unit mm gage number A4

modify Review Approved

angle ±2'
10~30 ±0.30
5~10 ±0.20
~ 5 ±0.10
Tolerance not specified