

Actuator

46-
2737.1920.000

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/46-2737.1920.000>

Your product:



46-2737.1920.000 Actuator

FRONT

Front dimension: Ø 40 mm

Front form: round

MOUNTING

Design: raised

Mounting cut-out: Ø 22.3 mm

OPERATING-/INDICATION PART

Lens illumination: non illuminative

Lens shape: mushroom-head

Lens material: Plastic

Lens colour: Red

Lens optics: opaque

ELECTRICAL CHARACTERISTICS

Protection class: II

MECHANICAL CHARACTERISTIC

Release type: Pull unlock

Weight: 0.036 kg

Mechanical lifetime: 50 000 cycles of operation

Tightening torque: 2 ... 3 Nm (17.7 ... 26.6 Lb-in)

AMBIENT CONDITION

IK front protection:	IK03
IP front protection:	IP65
Climate resistance:	+25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)
Operating temperature:	- 25 °C ... + 55 °C
Vibration resistance:	5g f= 2...500Hz (EN-IEC 60068-2-6)
Shock resistance:	30g, 18ms (EN-IEC 60068-2-27) 50g, 11ms (EN-IEC 60068-2-27)


CERTIFICATE

Conformities:	CE
Approbations:	CSA, EAC, UL
Standards:	CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, IEC EN 60947-5-5, UL508, UNI EN ISO 12100, UNI EN ISO 13850

OTHER

Dimension:	Ø 40 mm
Housing colour:	Yellow
max. number of switching elements:	4
Housing material:	Plastic
Short Description:	Actuator, Ø 22.3 mm, Ø 40 mm, mushroom-head, non illuminative, Red, Plastic, opaque, round, IP65, IK03, Pull unlock

Dimension drawings:

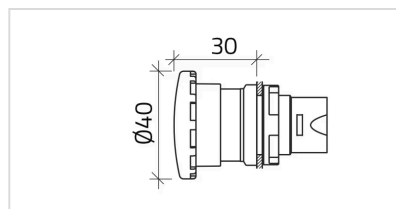

Mounting cut-outs:

