




Technical Data

22.01.2024

Shrinkable markers "Continuous Tube", thermal transfer
TULT – 3:1 Military and Electronics

TULT4.8-1.6YE

Article Number 553-40450

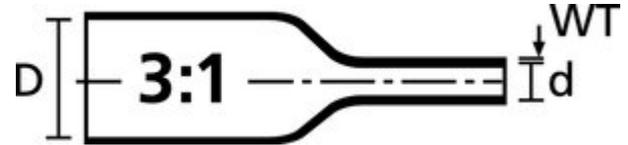

Material:

Polyolefin, cross-linked (PO-X)

Colour:

Yellow (YE)

Supplied \varnothing D min.:

4.8 mm

Recov. \varnothing d max.:

1.6 mm

Wall (WT):

0.56 mm

Shrink Ratio:

3:1

Min. Shrink Temperature - °C:

+90 °C

Test Method

Flammability:

UL 224 VW-1

Operating Temperature :

-55 °C to +135 °C

Dielectric Strength:

37 kV/mm

ASTM D876

Insulation Class:

B (VDE 0530)

Longitudinal Change After Shrinkage:

-15% max.

We assume no responsibility that the Product will be used for the intended purpose, this is beyond our control. It's up to the customer to check the suitability for a specific application by means of tests. Technical changes and errors reserved



Technical Data

22.01.2024

Shrinkable markers "Continuous Tube", thermal transfer
TULT – 3:1 Military and Electronics

Print Method: thermal transfer print
Print Method (Alternative): laser beam print
Application Tool: H6100, TT431, TT4030, TT4030DS



We assume no responsibility that the Product will be used for the intended purpose, this is beyond our control. It's up to the customer to check the suitability for a specific application by means of tests. Technical changes and errors reserved